



**TYPICAL CHARACTERISTICS
ON
BP13G-10G-CD-SFF**



DESIGNED, TESTED & DOCUMENTED BY:

SEBASTIAN PALACIO

September 26, 2012




**TYPICAL CHARACTERISTICS
ON
BP13G-10G-CD-SFF**

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Pass-Band:	8 – 18 GHz	8 – 18 GHz (See Plot)	
2	Insertion Loss:	1.5dB Typ. - 2.5dB Max	1.49dB (See Plot)	
3	VSWR:	2.0:1 Max - 1.5:1 Goal	1.65:1 (See Plot)	
4	Rejection @ DC to 6GHz	-70dB Typ.	-78.60dB (See Plot)	
5	Rejection @ 20 to 23GHz	-60dB Typ.	-56.33dB (See Plot)	



TYPICAL CHARACTERISTICS ON BP13G-10G-CD-SFF


INSERTION LOSS & RETURN LOSS

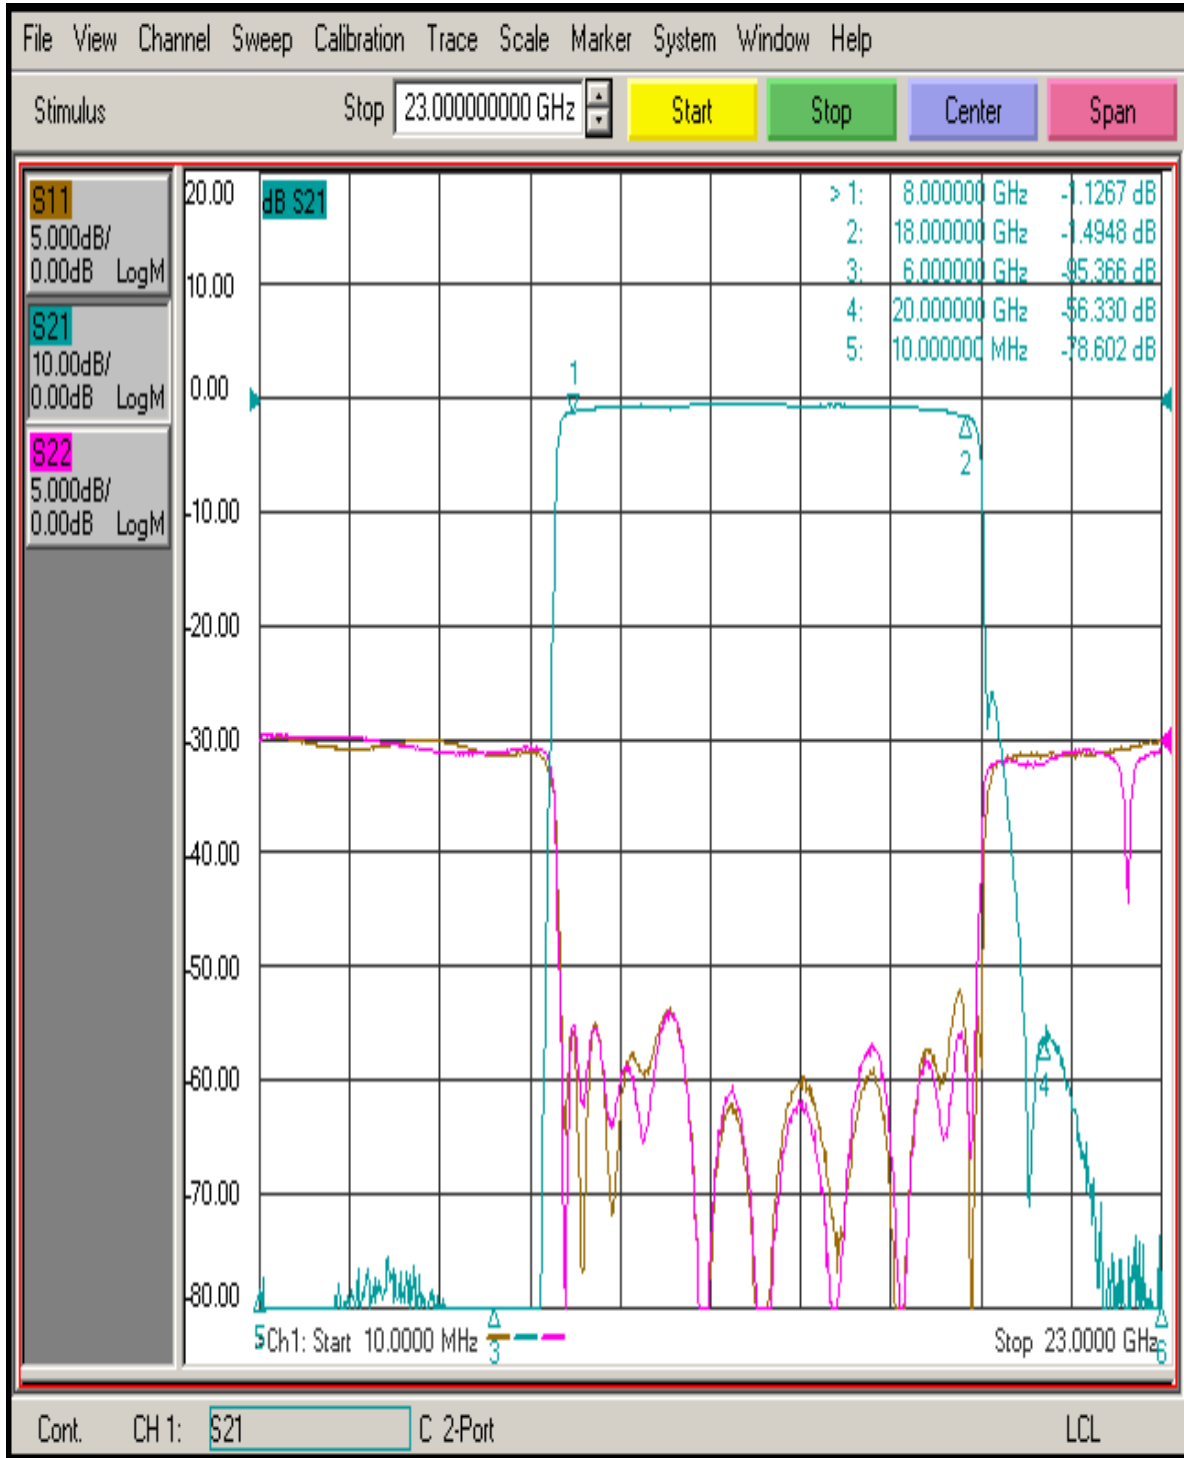



TYPICAL CHARACTERISTICS ON BP13G-10G-CD-SFF

INSERTION LOSS - RETURN LOSS – GROUP DELAY – PHASE LINEARITY

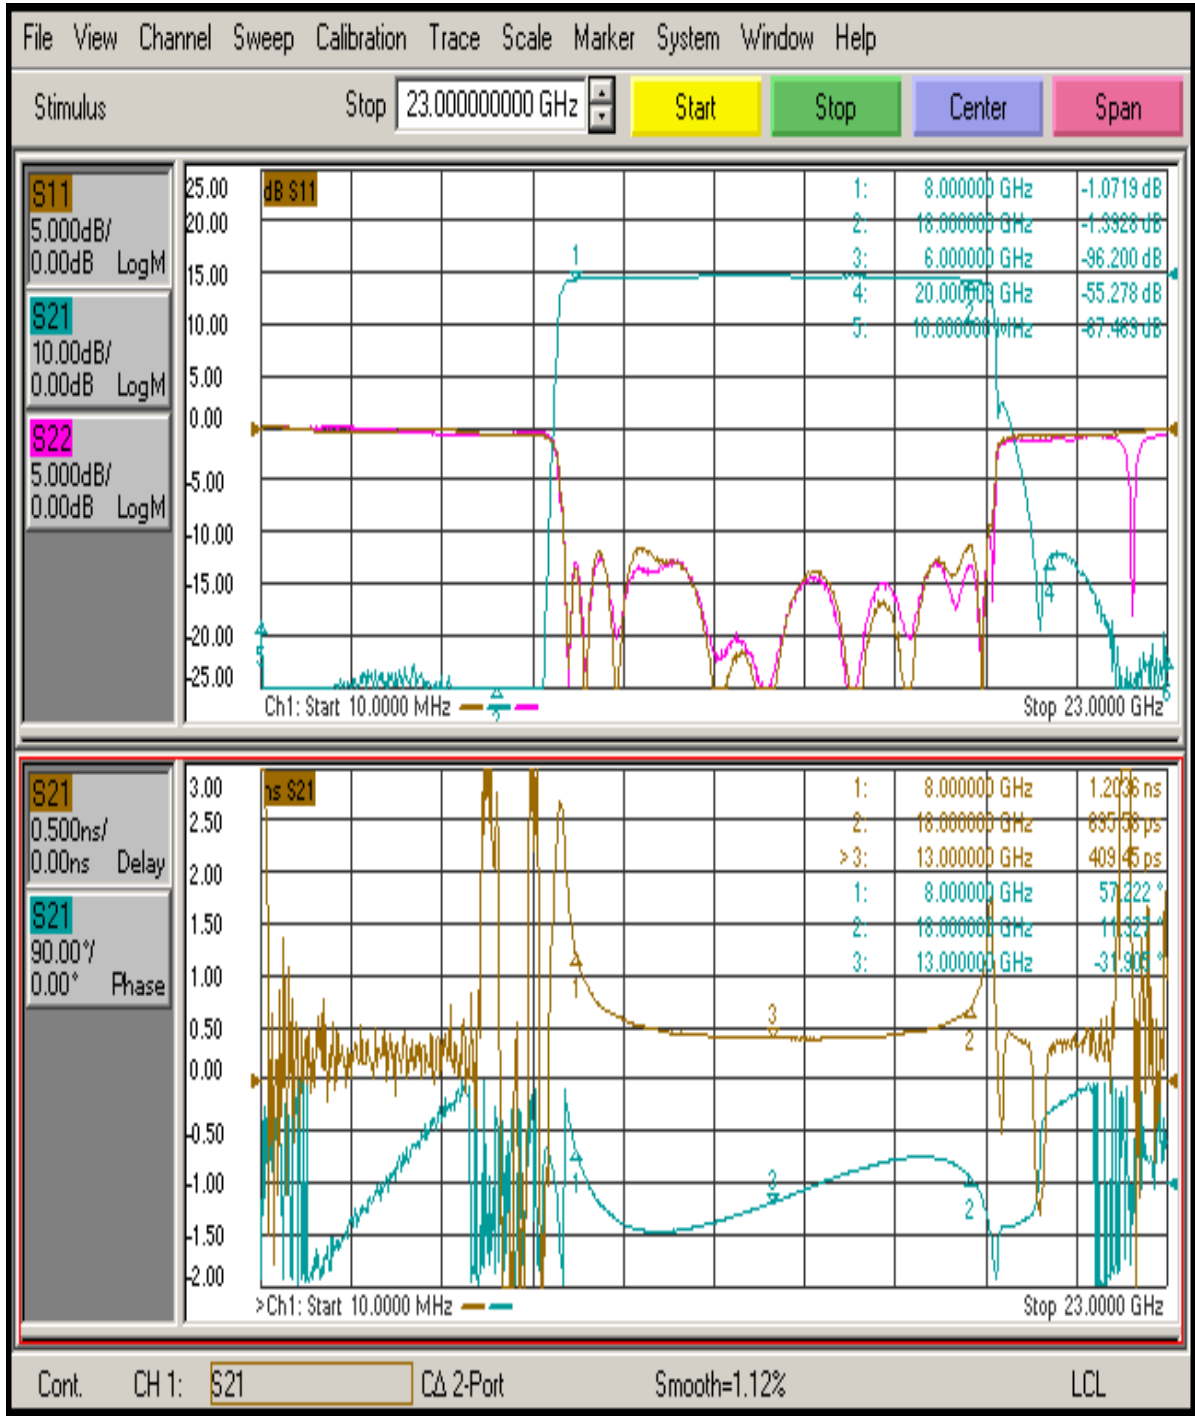



TYPICAL CHARACTERISTICS ON BP13G-10G-CD-SFF

INSERTION LOSS & RETURN LOSS

DC TO 40GHz

