



**TYPICAL TEST DATA
ON
FILTER**

Customer :
 SO No :
 Model No : 7CL9D66G-960-CD-SFF
 Serial No : PL9374/1133 - PL9381/1133, PL6323/0943

Tested By : S. PALACIO
 Temperature : +25°C
 Date : 8/19/2011

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Center Frequency	9660 MHz Nom.	See plots	
2	3 dB Pass band Bandwidth:	960 MHz Min.	See plots	
3	Passband Insertion Loss:	5 dB Max	See plots	
4	Loss Ripple (peak to peak)	0.5 dB Max	See plots	
5	Rejection	70 dB DC – 7800 MHz, @ 11940 MHz, @ 13750 MHz Min.	See plots	
6	Rejection	50 dB @ 8350 MHz, 14500 - 17000 MHz	See plots	
7	Pass band VSWR	1.5:1 Max	See plots	
8	Input Power	+30 dBm	Pass	
9	Impedance (Source Load)	50 ohms Nom.	Pass	


Production Manager Approval: _____ Date: _____

QA/QC Approval: _____ Date: _____

PLANAR MONOLITHICS INDUSTRIES, INC.
 7311-F GROVE ROAD FREDERICK, MD 21704
 TEL: 301-682-5019 FAX: 301-662-1731
 www.pmi-rf.com



Typical Performance

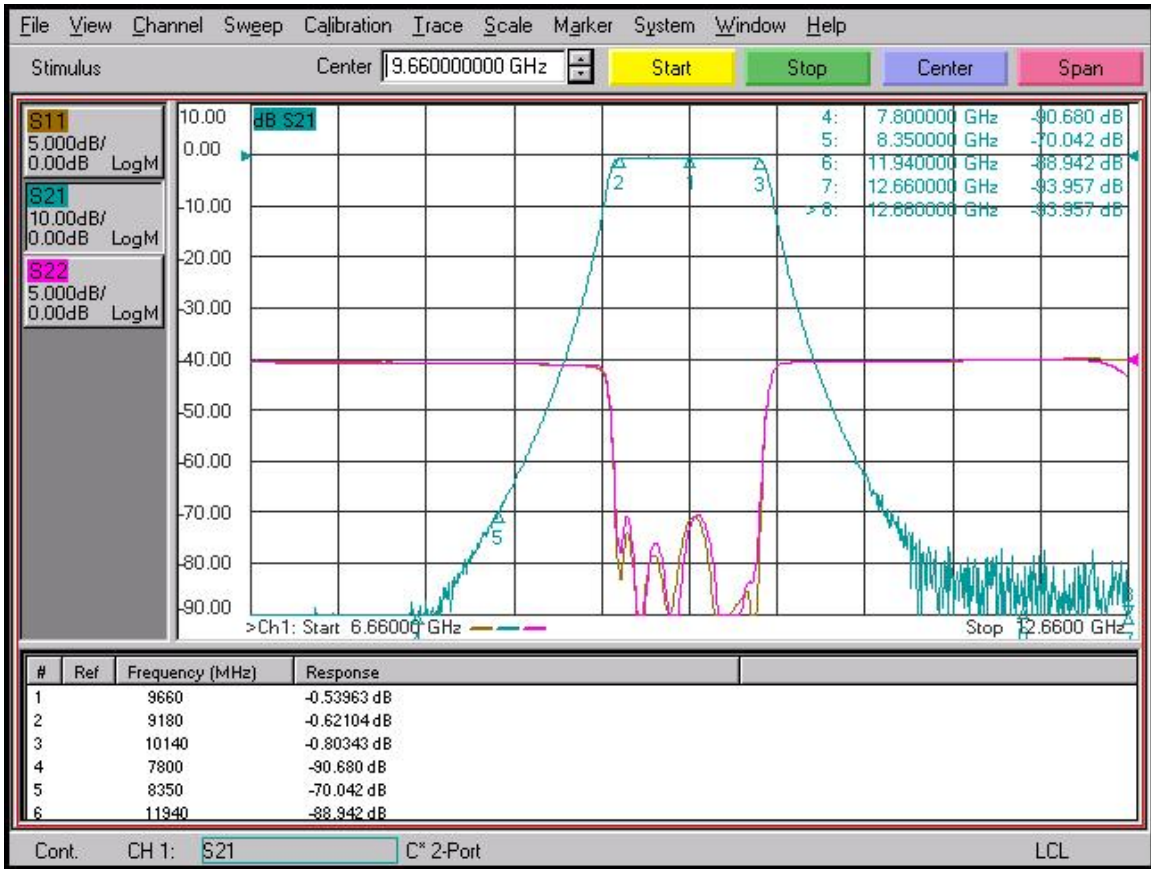

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD FREDERICK, MD 21704

TEL: 301-682-5019 FAX: 301-662-1731

www.pmi-rf.com