

PMI MODEL NO. PDRO-37D8G-13DBM-EXT IS A DRO WITH AN OUTPUT FREQUENCY OF 37800 MHz AND A MINIMUM OUTPUT LEVEL OF +13 dBm.



Reported By
Y Li
6/26/2023

**TYPICAL CHARACTERISTICS
ON
PDRO-37D8G-13DBM-EXT**


PRODUCT FEATURE

DESCRIPTION

PMI MODEL NO. PDRO-37D8G-13DBM-EXT IS A DRO WITH AN OUTPUT FREQUENCY OF 37800 MHz AND A MINIMUM OUTPUT LEVEL OF +13 dBm.

SPECIFICATIONS

- OUTPUT FREQUENCY: 37800 MHz
- REFERENCE FREQUENCY: 100 MHz (SINEWAVE) - EXTERNAL
- INPUT LEVEL: +3 TO +13 dBm
- OUTPUT LEVEL: +13 dBm MIN
- SPURIOUS: -50 dBc MAX
- HARMONICS: -20 dBc MAX
- LOAD VSWR: 1.5:1
- PHASE NOISE (REF INPUT 8 dBm MIN @ 25°C):
 - 65 dBc/Hz @ 100 Hz MAX
 - 81 dBc/Hz @ 1 kHz MAX
 - 95 dBc/Hz @ 10 kHz MAX
 - 107 dBc/Hz @ 100 kHz MAX
 - 123 dBc/Hz @ 1 MHz MAX
- FREQUENCY STABILITY: SAME AS REFERENCE
- SUPPLY VOLTAGE: +12 V TO 15V
- CURRENT: 300 mA MAX
- LOCK DETECTOR: TTL HIGH - LOCK
- CONNECTOR: RF CONNECTOR: 2.92mm FEMALE
REF CONNECTOR: SMA (F)
POWER: THROUGH CAP
- DIMENSIONS: 2.25" x 2.25" x 0.62"
- REFERENCE PHASE NOISE:
 - 135 dBc/Hz @ 100 Hz MAX
 - 155 dBc/Hz @ 1 kHz MAX
 - 165 dBc/Hz @ 10 kHz MAX
 - 165 dBc/Hz @ 100 kHz MAX
- FINISH: NICKEL PLATED

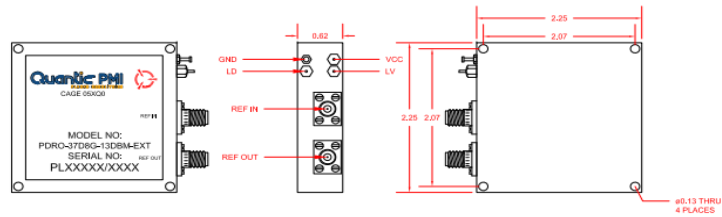

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	05/23/23	
	A2	ECN #23-0121	06/26/23	

ENVIRONMENTAL RATINGS

- TEMPERATURE: -20°C TO +85°C (OPERATING)
-55°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202, METHOD 103B COND. B
- SHOCK: MIL-STD-202, METHOD 213B COND. B
- VIBRATION: MIL-STD-202, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202, METHOD 107D COND. A

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

PMI CONFIDENTIAL AND PROPRIETARY

7309-A GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DESIGN	<i>MJD</i>	05/23/23	PRODUCT FEATURE PDRO-37D8G-13DBM-EXT		
DRAWN			SIZE	FORM NO.	DWG NO.
ISSUED			A	05XQ0	27046660
			SCALE	N:S	SHEET 1 OF 1



**TYPICAL CHARACTERISTICS
ON
PDRO-37D8G-13DBM-EXT**

Test Data

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS		
			25°C	-20°C	85°C
1	Output Frequency	37800 MHz	37799981779 Hz	37799983549 Hz	37799984404 Hz
2	Ref Frequency	100 MHz	100 MHz	100 MHz	100 MHz
3	Input Level	3 to 13 dBm	3 to 13 dBm	3 to 13 dBm	3 to 13 dBm
4	Output level	13 dBm Min	15.6 dBm	15.9 dBm	15.3 dBm
5	Spurious	-50 dBc Max	-55.4 dBc	-56.3 dBc	-56 dBc
6	Harmonics	-20 dBc Min	Pass By Design		
7	Phase Noise (Ref in 8dBm MIN @ 25C)	-65 dBc/Hz @ 100 Hz Max -81 dBc/Hz @ 1 kHz Max -95 dBc/Hz @ 10 kHz Max -107 dBc/Hz @ 100 kHz Max -123 dBc/Hz @ 1 MHz Max	100 Hz: -81 dBc/Hz 1 kHz: -103 dBc/Hz 10 kHz: -102 dBc/Hz 100 kHz: -109 dBc/Hz 1 MHz: -130 dBc/Hz		
8	Supply Voltage	12 to 15 V	12 to 15 V	12 to 15 V	12 to 15 V
9	Current	300 mA Max	12: 275 mA 15: 231 mA	12: 273 mA 15: 230 mA	12: 277 mA 15: 233 mA
10	Lock Detector	TTL High Lock	TTL High Lock	TTL High Lock	TTL High Lock

*Spurious maximum measured value includes both wideband sweep spurs and sidebands close to carrier.

**TYPICAL CHARACTERISTICS
 ON
 PDRO-37D8G-13DBM-EXT**

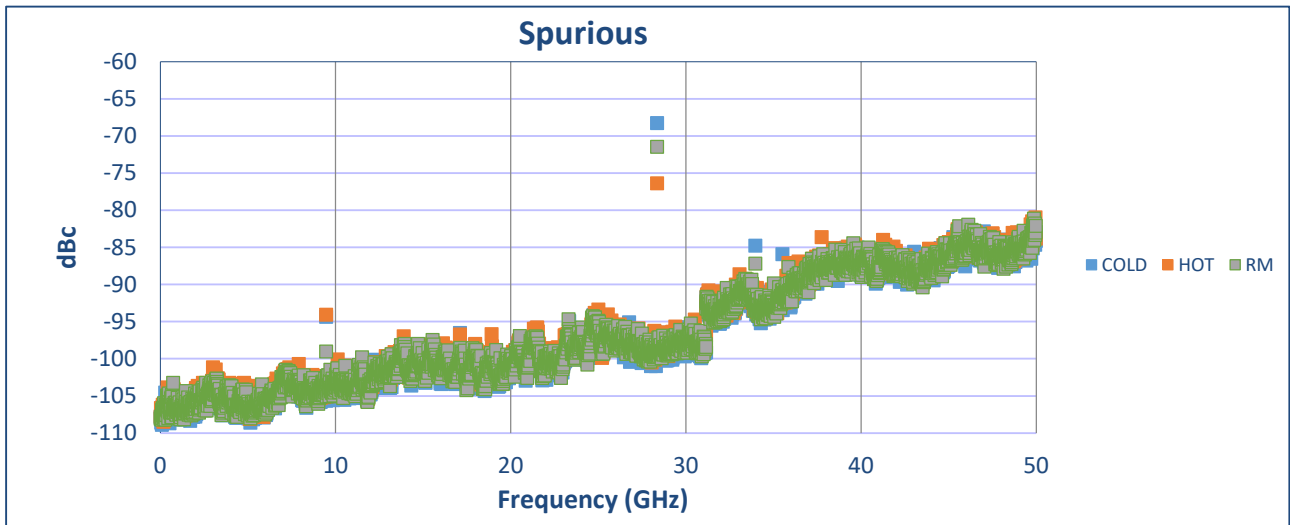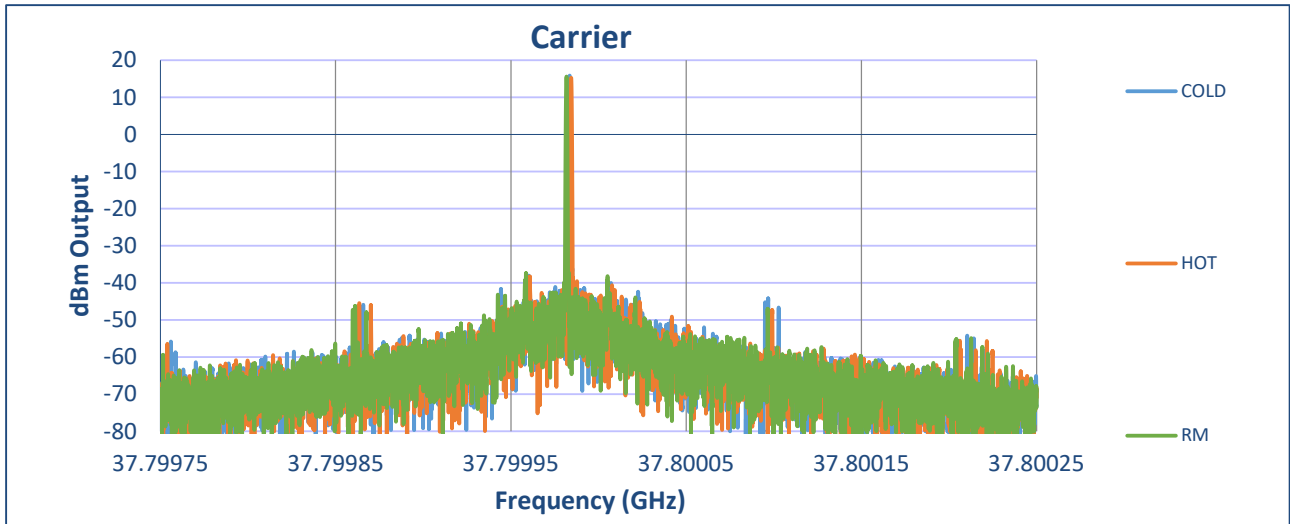

**TYPICAL CHARACTERISTICS
ON
PDRO-37D8G-13DBM-EXT**

Phase Noise

R&S FSUP 50 Signal Source Analyzer				LOCKED			
Settings		Residual Noise [T1 w/o spurs]		Phase Detector +0 dB			
Signal Frequency:	37.800000 GHz	Int PHN (30.0 .. 30.0 M)	-45.9 dBc				
Signal Level:	-0.96 dBm	Residual PM	0.411 °				
Cross Corr Mode	Harmonic 1	Residual FM	6.33 kHz				
Internal RefTuned	Internal Phase Det	RMS Jitter	0.0302 ps				

