



TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV

PMI MODEL PMSN-3DR-05-STANDARD-LV IS A SINGLE POLE, THREE THROW REFLECTIVE SWITCH MODULE WITH VERY LOW INSERTION LOSS, HIGH ISOLATION, HIGH POWER (1 WATT) AND WITH HIGH SPEED (40 nsec) INTEGRAL CMOS DRIVER DESIGNED FOR 1 GHz to 18 GHz OPERATION.



May 29, 2026

Designed by:

Engineering PMI

Tested and Reported by:

V. Vasquez




DESCRIPTION:

ZONE	REV.	DESCRIPTION	DATE	APPROVE
	A1	ORIGINAL RELEASE	06/27/2024	
	B1	ECN #26-0120	06/27/2026	

SPECIFICATIONS:

- | TRUTH TABLE | | | |
|-------------|----|----|----|
| | J1 | J2 | J3 |
| E1 | 0 | 1 | 1 |
| E2 | 1 | 0 | 1 |
| E3 | 1 | 1 | 0 |



ENVIRONMENTAL RATINGS:

- NOTE: SPECIFICATIONS WILL VARY OVER TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

[illegible]


TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV

Technical Specifications


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS		
			+25°C	-65°C	+85°C
1	Frequency Range:	1 - 18 GHz	1 - 18 GHz	1 - 18 GHz	1 - 18 GHz
2	Insertion Loss:	3.5 dB Max.	3.17 dB	2.72 dB	3.22 dB
			See Graph	See Graph	See Graph
3	Isolation:	60 dB Min	71.13 dB	72.6 dB	71.13 dB
			See Graph	See Graph	See Graph
4	VSWR Input	1.75:1 (1 to 12.4 GHz) Max. 2.0:1 (12.4 to 18 GHz) Max.	1.67 :1 (In)	1.71 :1 (In)	1.64 :1 (In)
			1.63 :1 (In)	1.7 :1 (In)	1.62 :1 (In)
			See Graph	See Graph	See Graph
	VSWR Output	1.75:1 (1 to 12.4 GHz) Max. 2.0:1 (12.4 to 18 GHz) Max.	1.67 :1 (Out)	1.71 :1 (Out)	1.66 :1 (Out)
			1.86 :1 (Out)	1.97 :1 (Out)	1.88 :1 (Out)
			See Graph	See Graph	See Graph
5	Power Handling	1 W CW Max	Pass 1 Watt CW See Graphs	Pass 1 Watt CW See Graphs	Pass 1 Watt CW See Graphs
6	Video Transients	100 mV Peak to Peak	22.5 mV Peak to Peak See Plot		
7	Switching Speed:	Rise Time: 10 ns Max. Fall Time: 10 ns Max. Speed ON: 25 ns Max: Speed OFF: 40 ns Max.	3.8 ns		
			7.3 ns		
			18.5 ns		
			37.4 ns		
			See Plots		
8	Survival Power	20 WATTS PEAK (0.5 μ s PW, 0.1% Duty Cycle)	Pass 20 Watts Peak See Plot		
9	Control:	TTL Logic "0" = On TTL Logic "1" = Off	Pass		
10	DC Supply:	+5 VDC @ 75 mA Max. -12 VDC @ 30 mA Max	+5 VDC @ 25 mA -12 VDC @ 17 mA		

TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV


Insertion Loss vs. Frequency @ +25°C

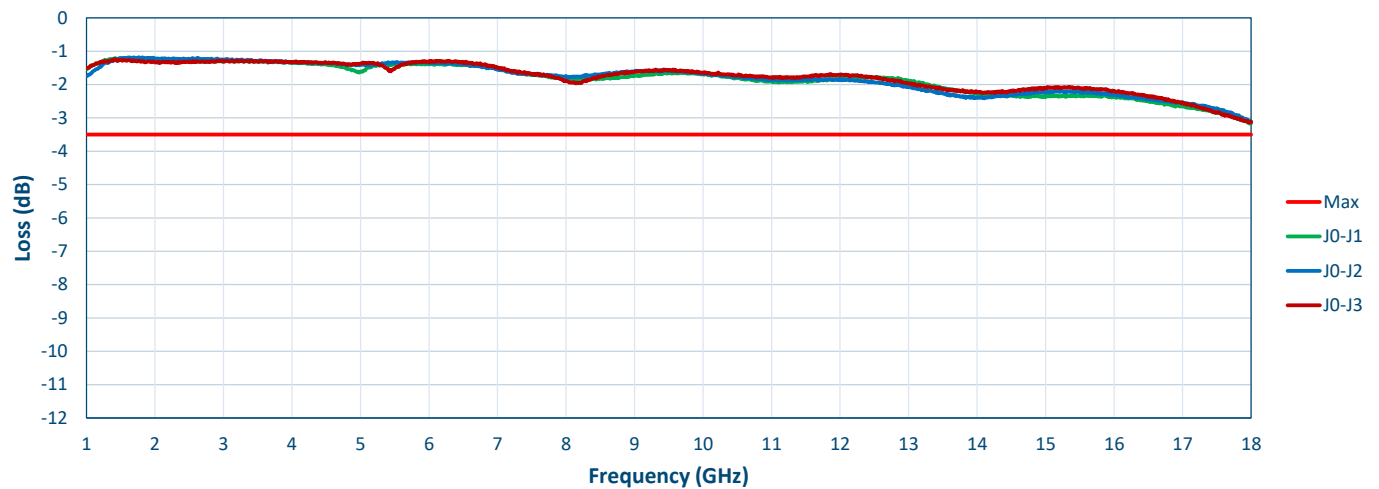

Insertion Loss vs. Frequency @ -65°C

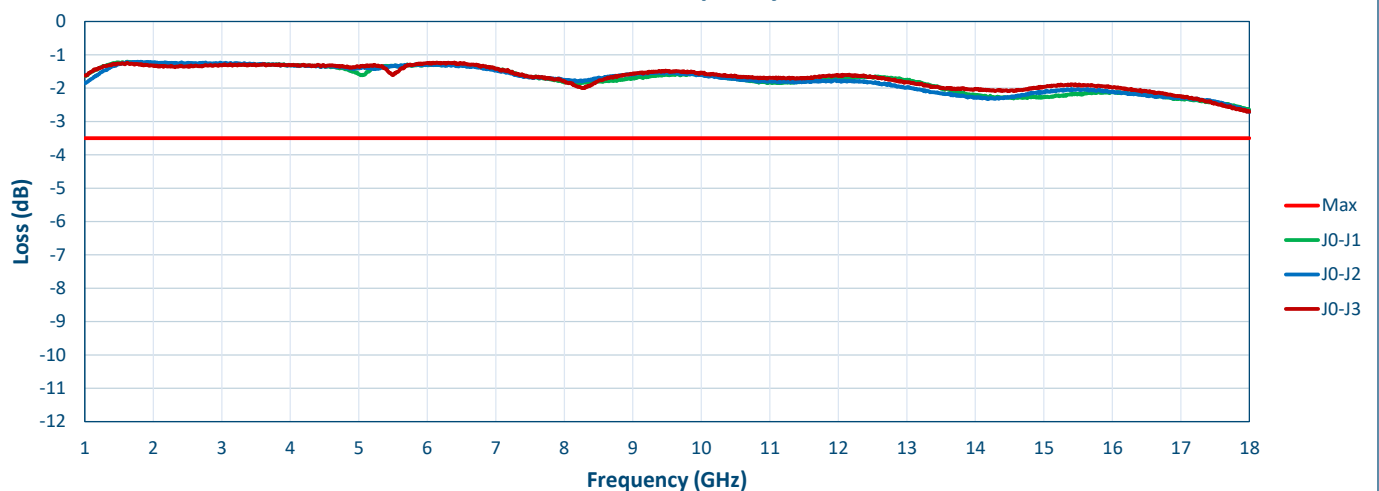


Insertion Loss vs. Frequency @ +85°C

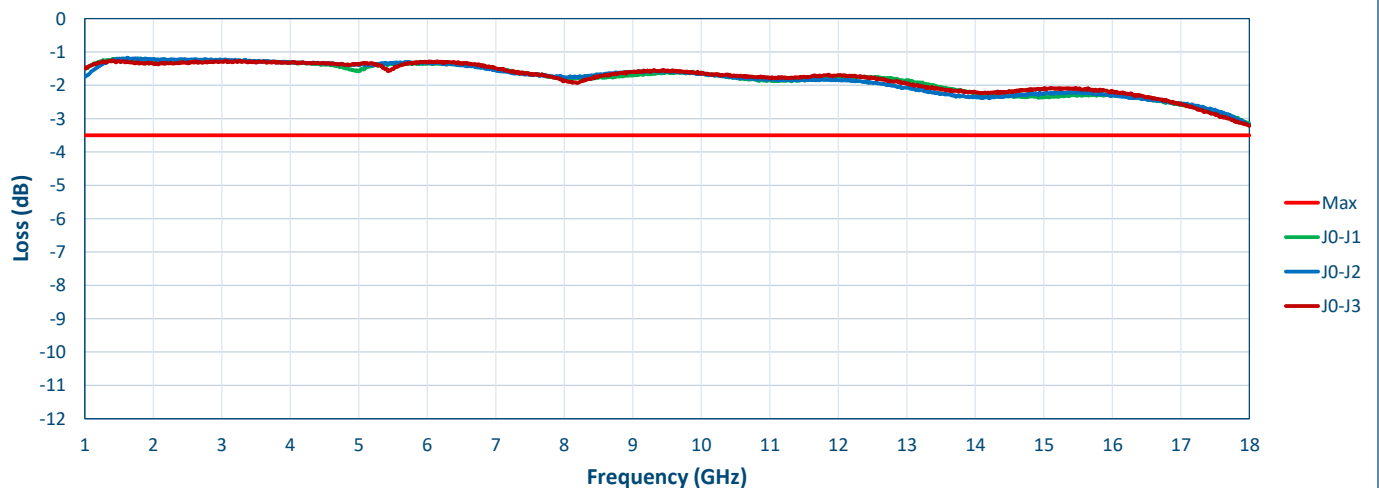


TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV


Input VSWR vs. Frequency @ +25°C

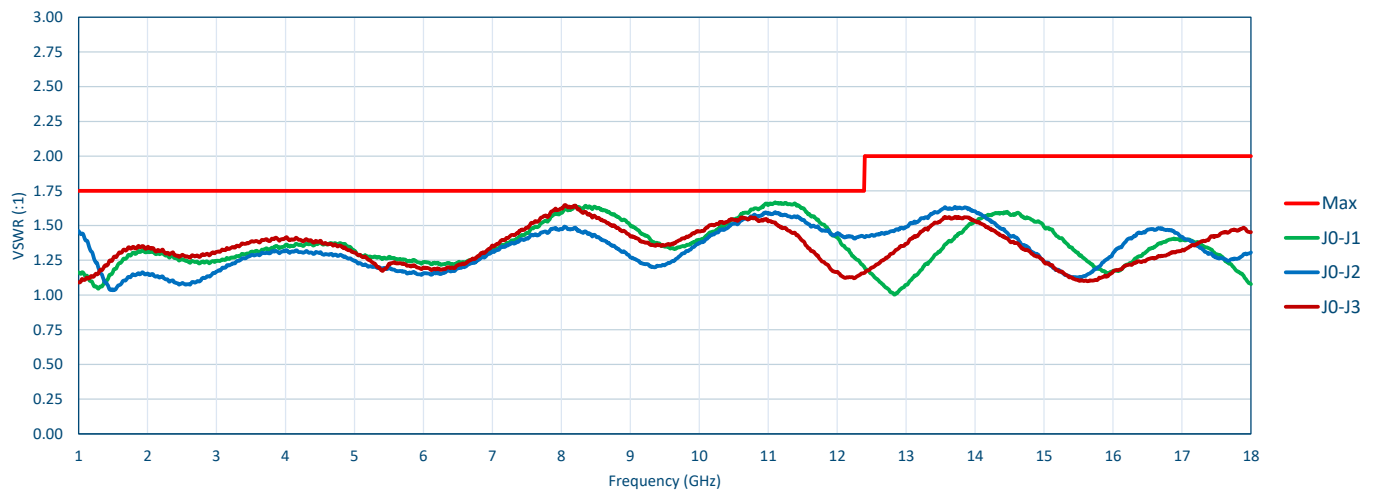

Input VSWR vs. Frequency @ -65°C

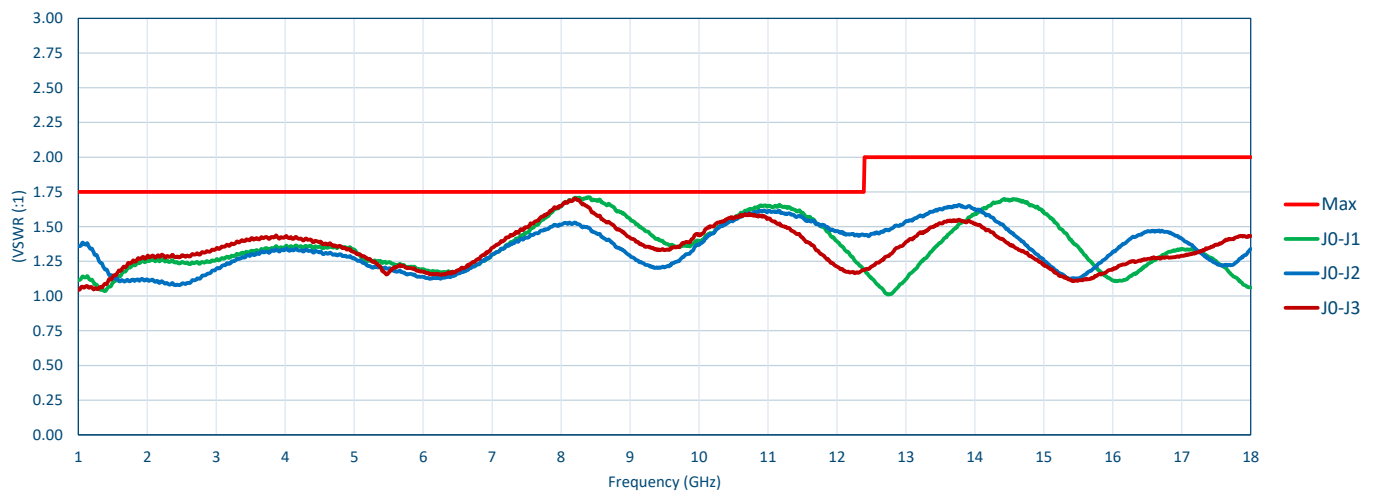


Input VSWR vs. Frequency @ +85°C

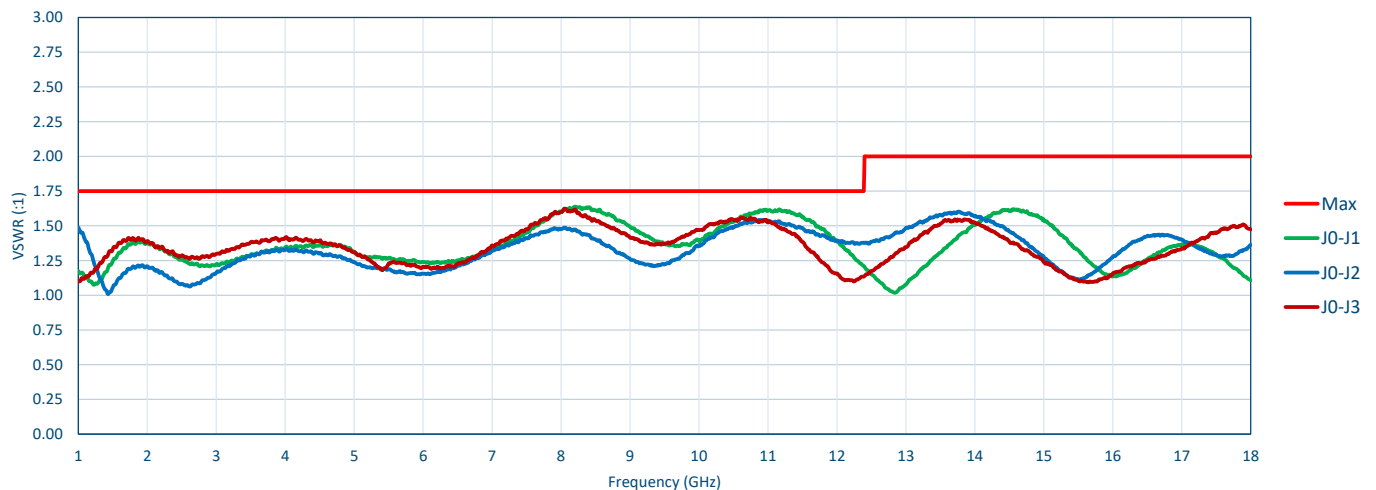


TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV


Output VSWR vs. Frequency @ +25°C

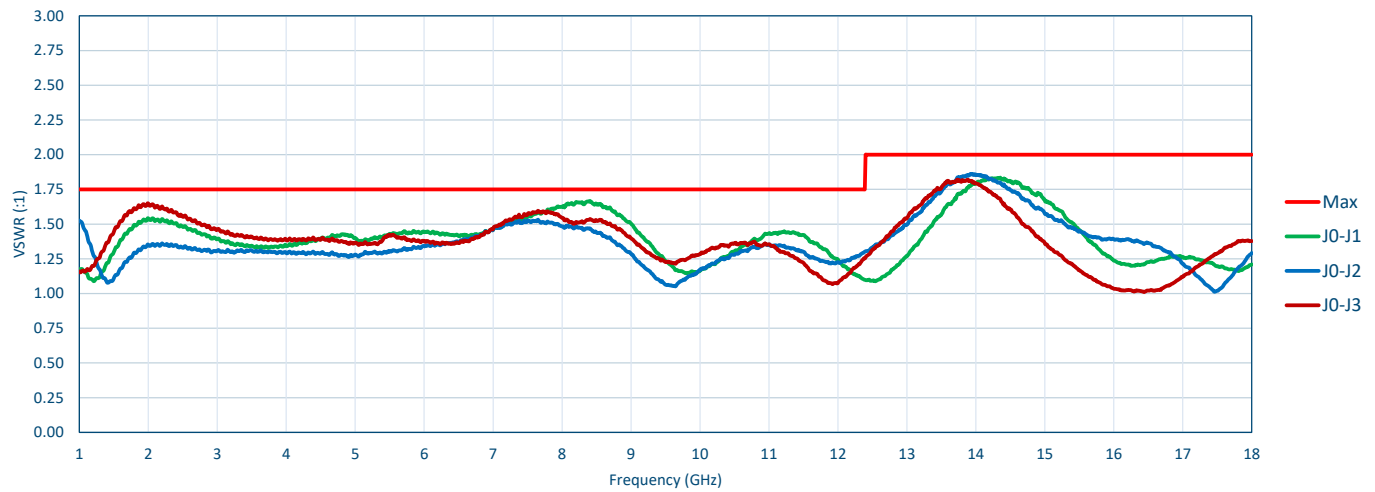




Output VSWR vs. Frequency @ -65°C

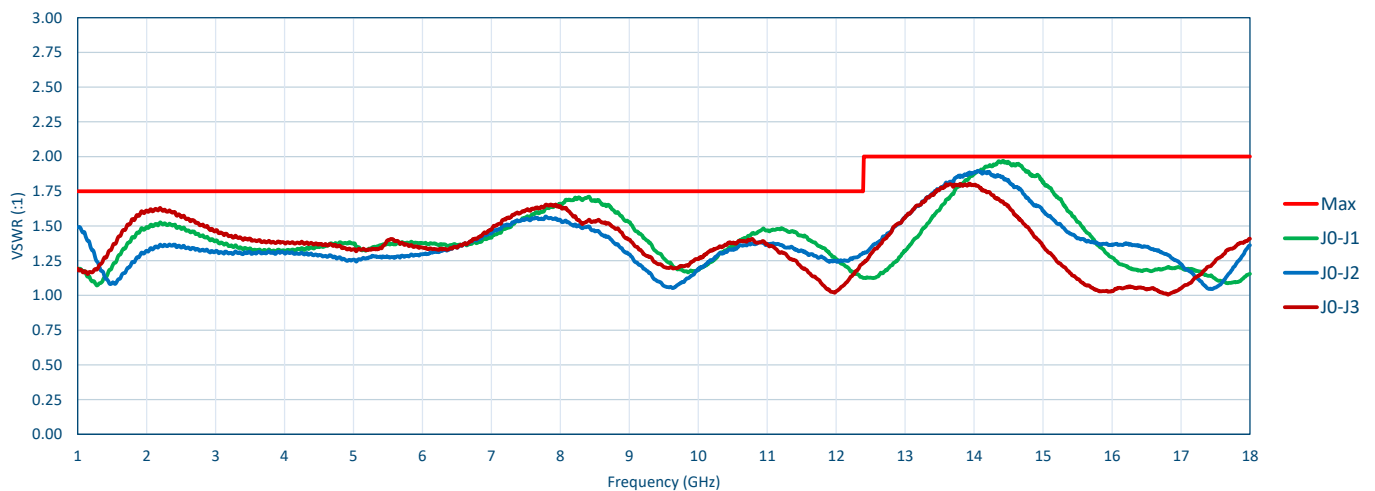

Output VSWR vs. Frequency @ +85°C

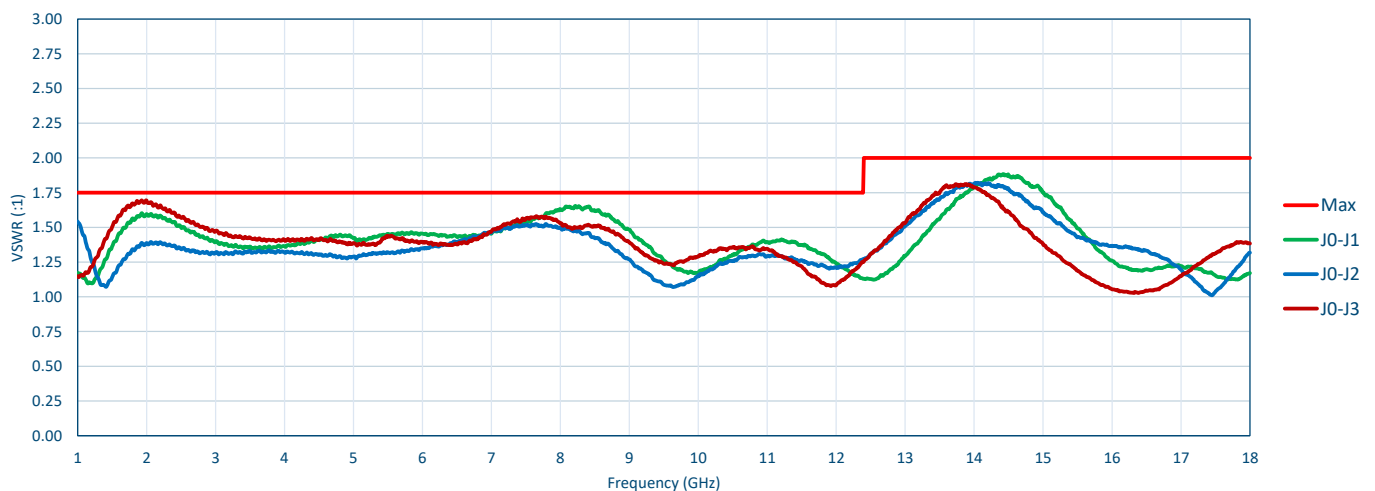


TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV

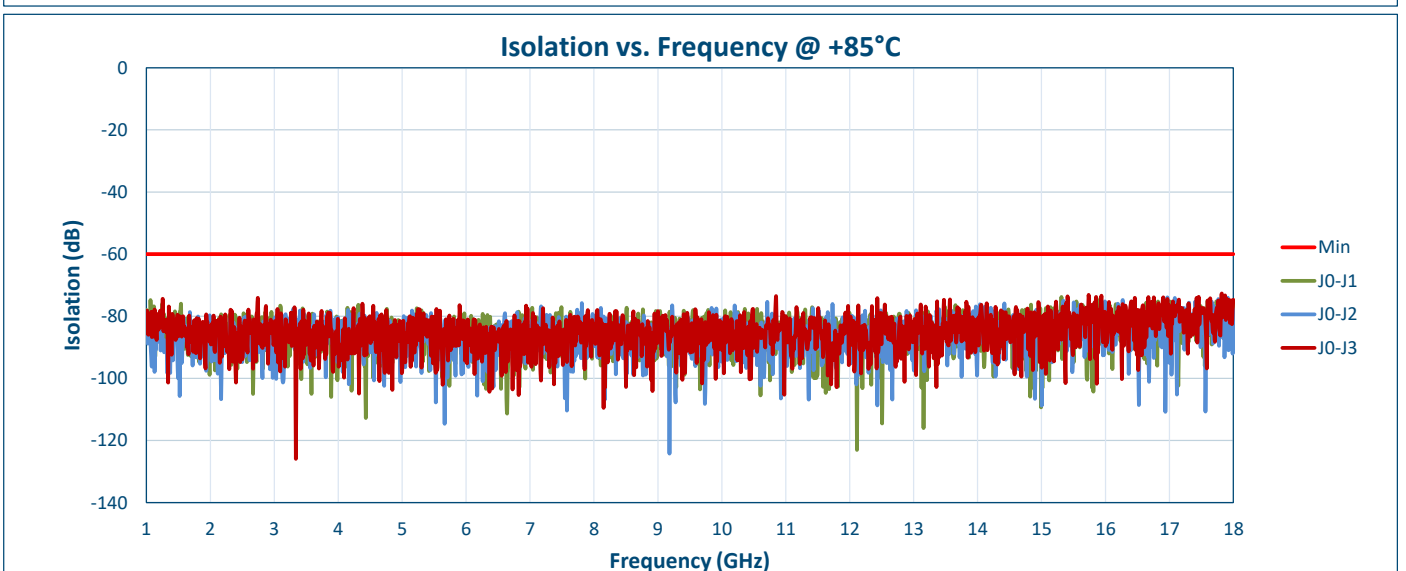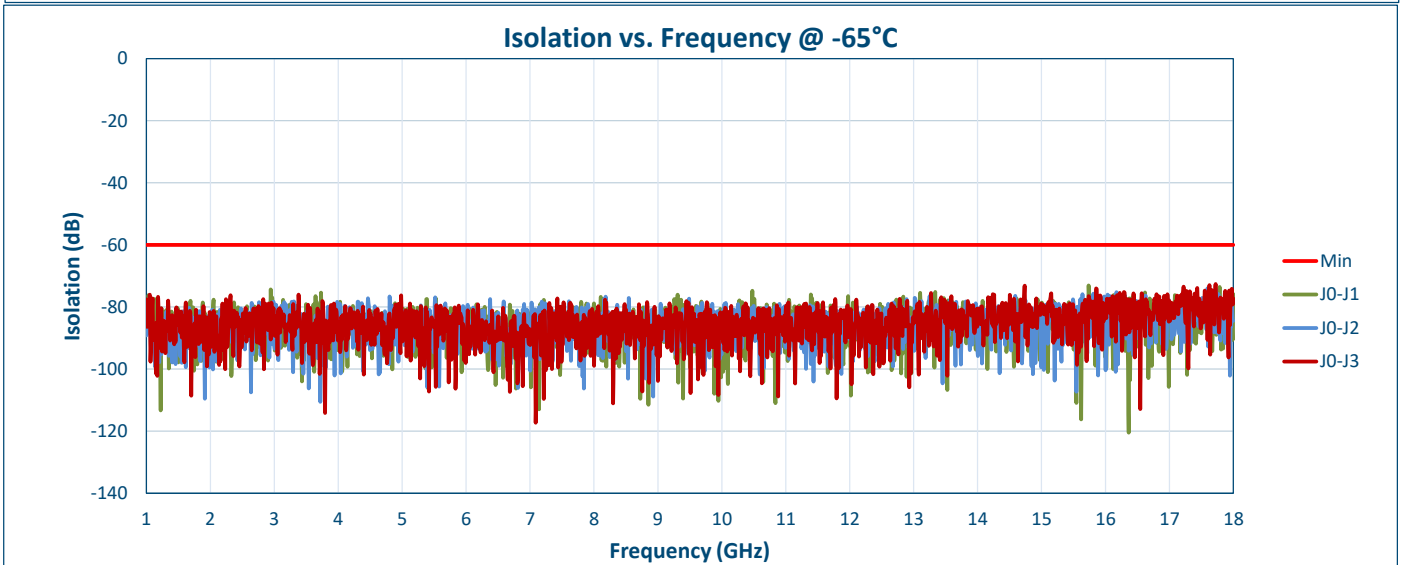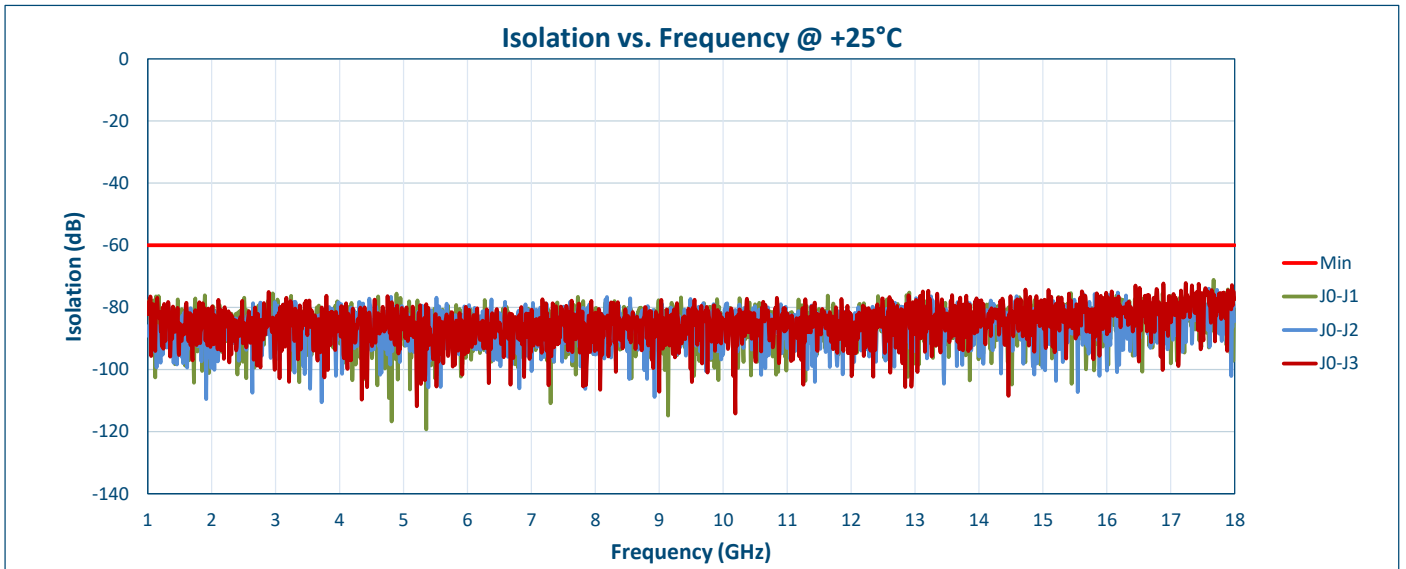


TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV


High Power Test @ +25° C

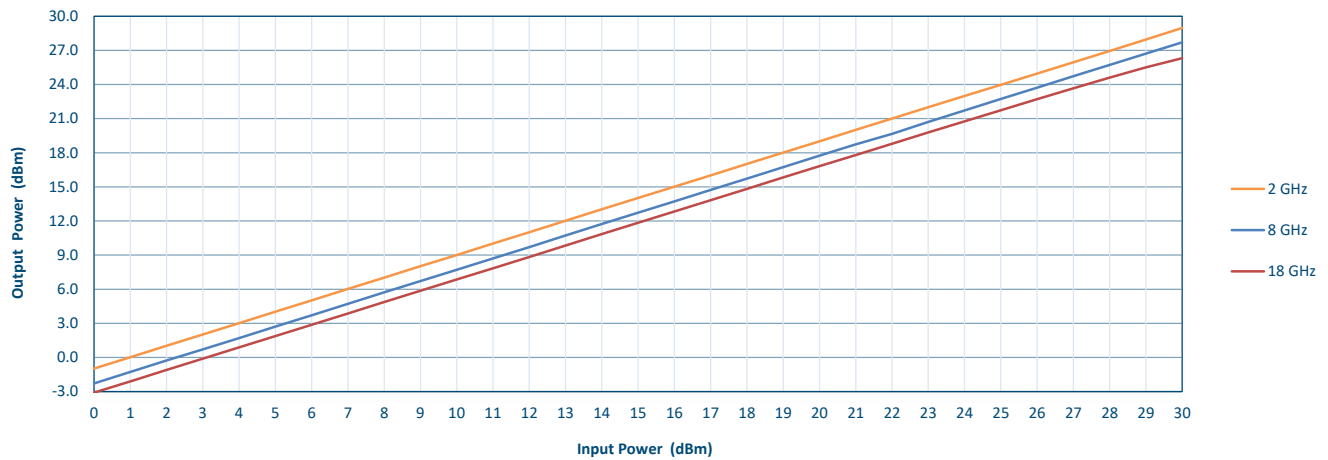

High Power Test @ -65° C

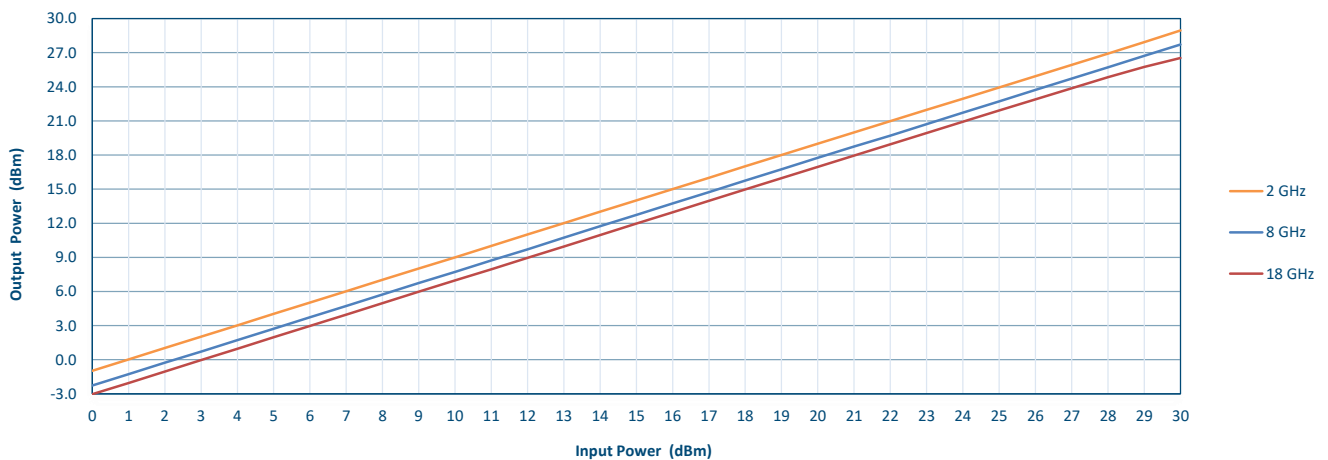


High Power Test @ +85° C

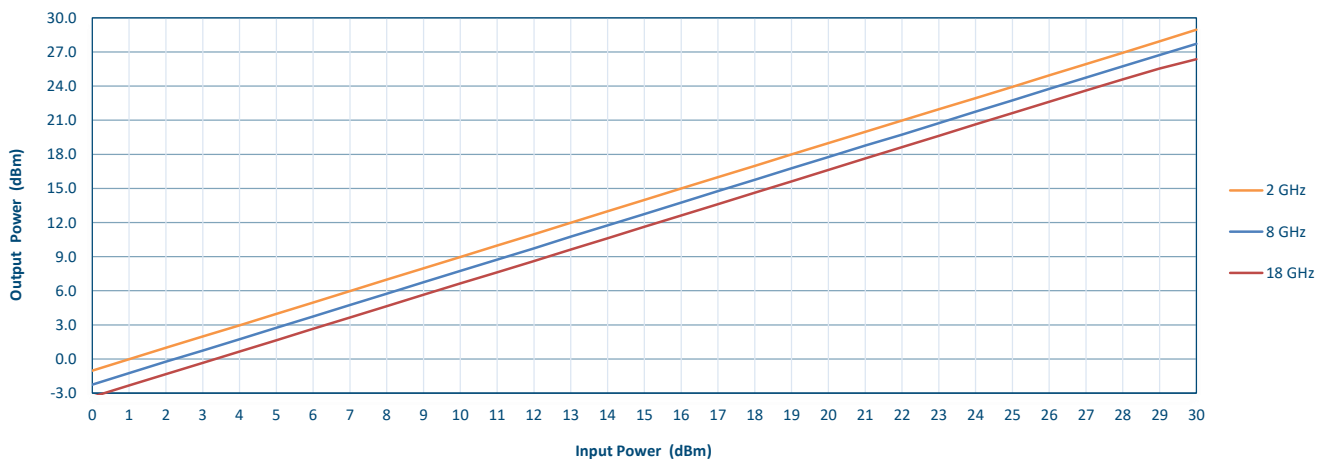

TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV

FULL PULSE

PRF 1 MHz, Duty Cycle 50%
Freq 5 GHz. Input Power: +10 dBm

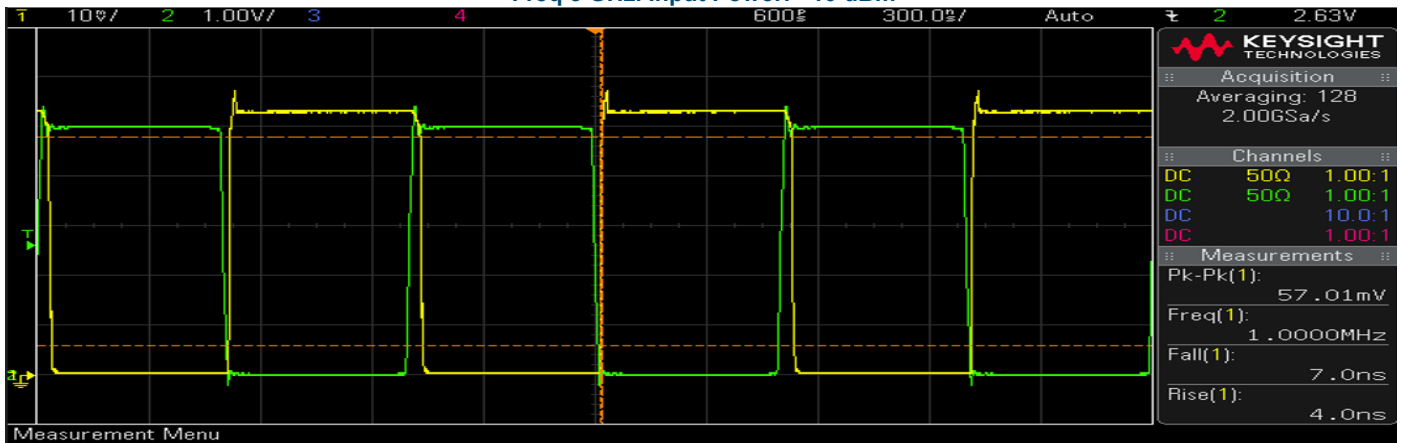

RISE TIME

PRF 1 MHz, Duty Cycle 50%
Freq 5 GHz. Input Power: +10 dBm



FALL TIME

PRF 1 MHz, Duty Cycle 50%
Freq 5 GHz. Input Power: +10 dBm




RF signal TTL signal

TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV


SPEED ON

PRF 1 MHz, Duty Cycle 50%
Freq 5 GHz. Input Power: +10 dBm

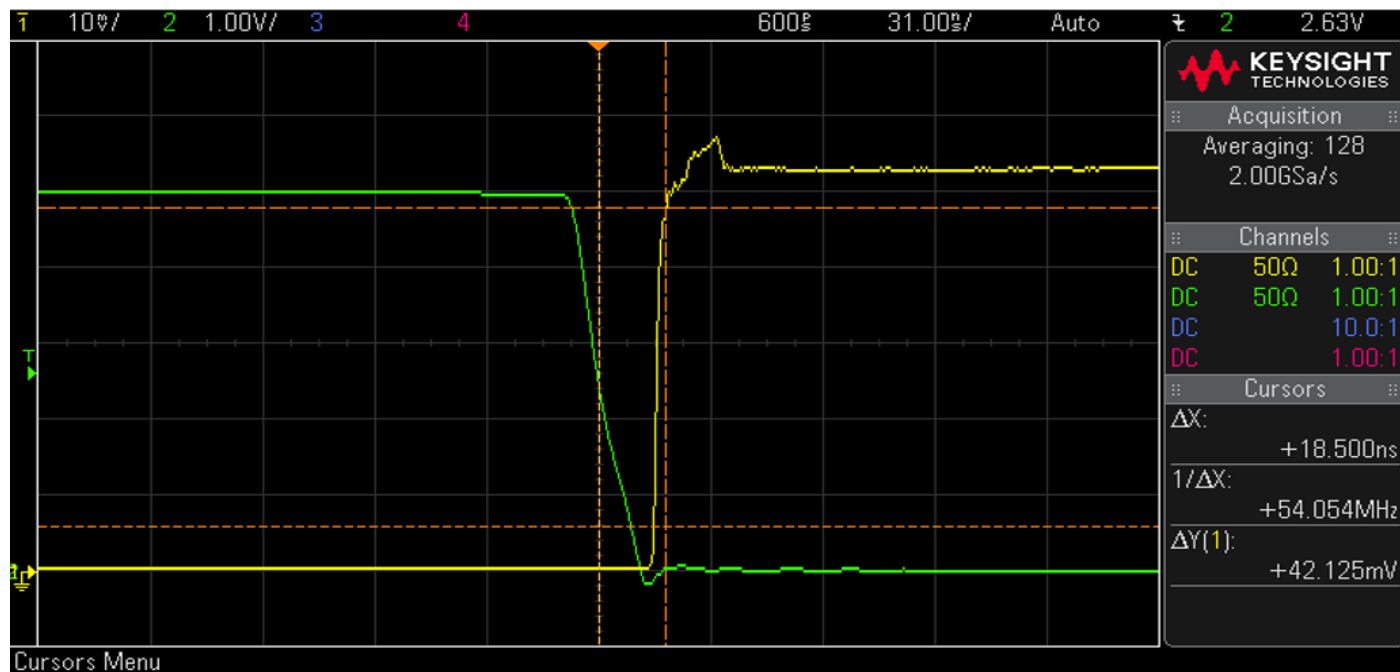

SPEED OFF

PRF 1 MHz, Duty Cycle 50%
Freq 5 GHz. Input Power: +10 dBm

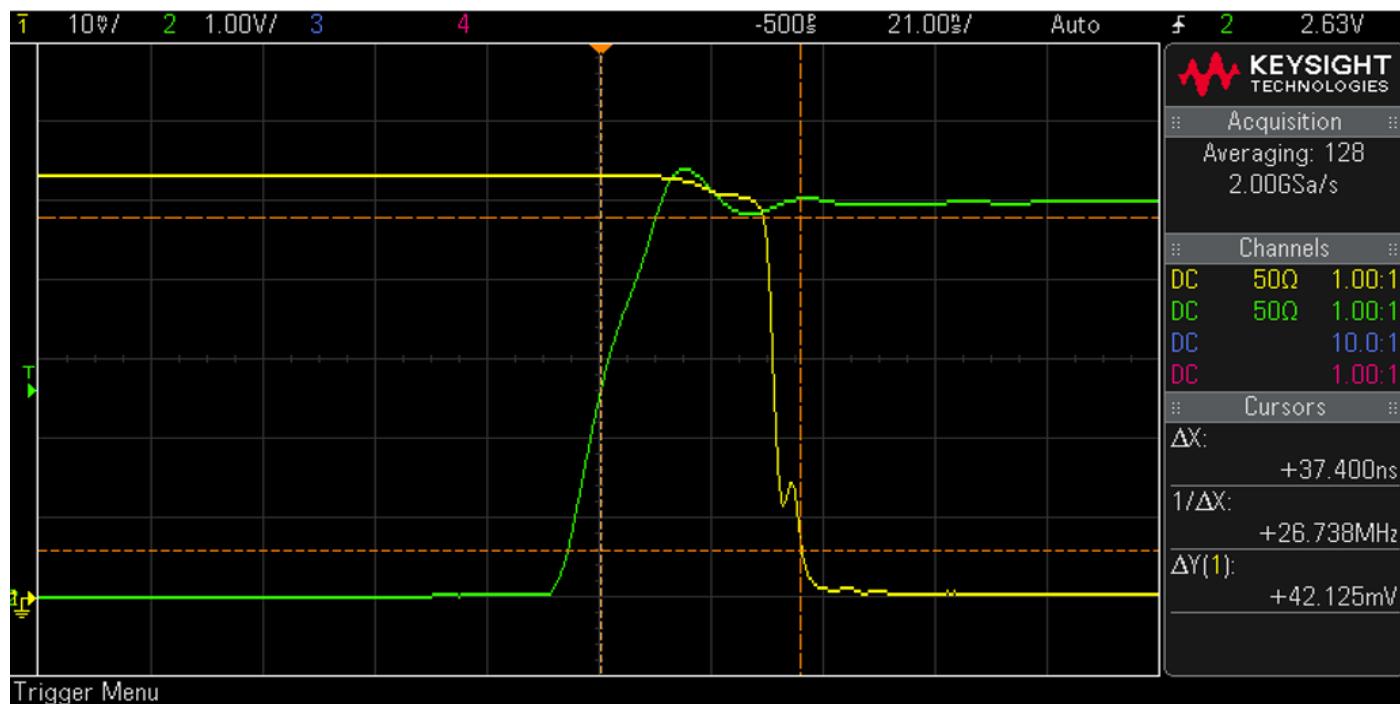


RF signal TTL signal

TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV


DELAY ON

PRF 1 MHz, Duty Cycle 50%
Freq 5 GHz. Input Power: +10 dBm

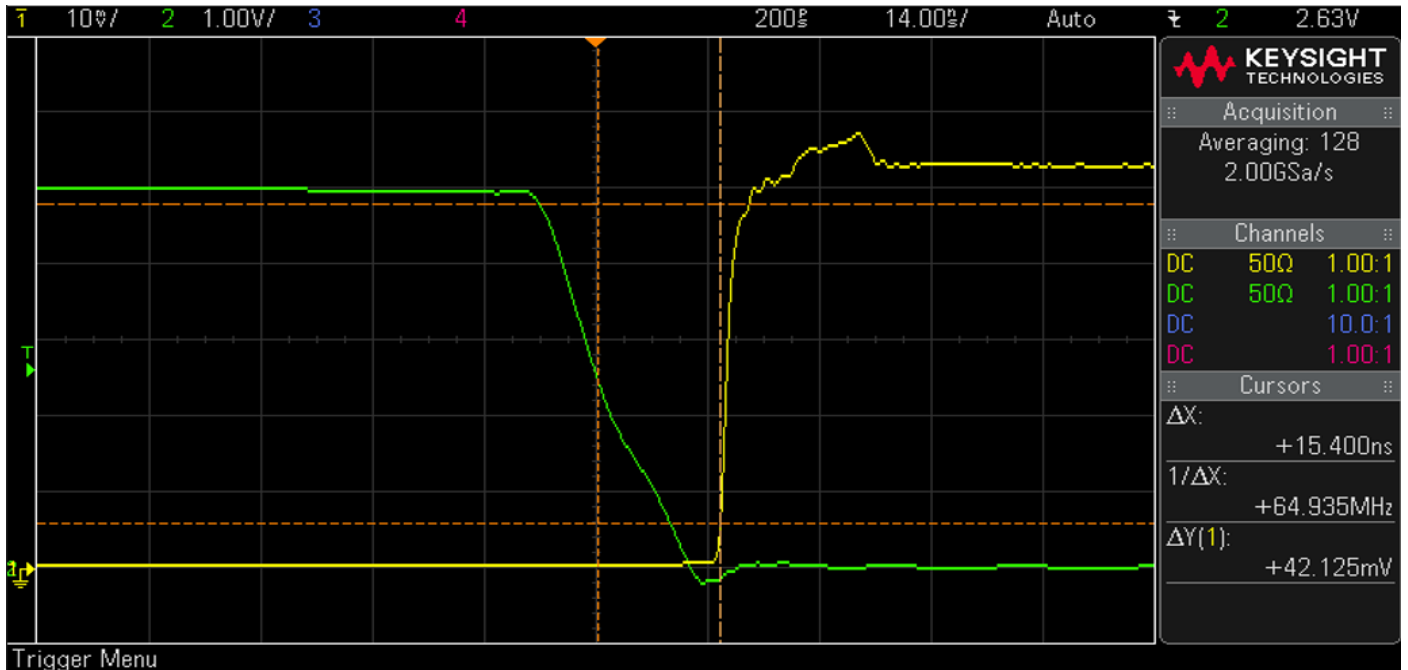

DELAY OFF


PRF 1 MHz, Duty Cycle 50%
Freq 5 GHz. Input Power: +10 dBm

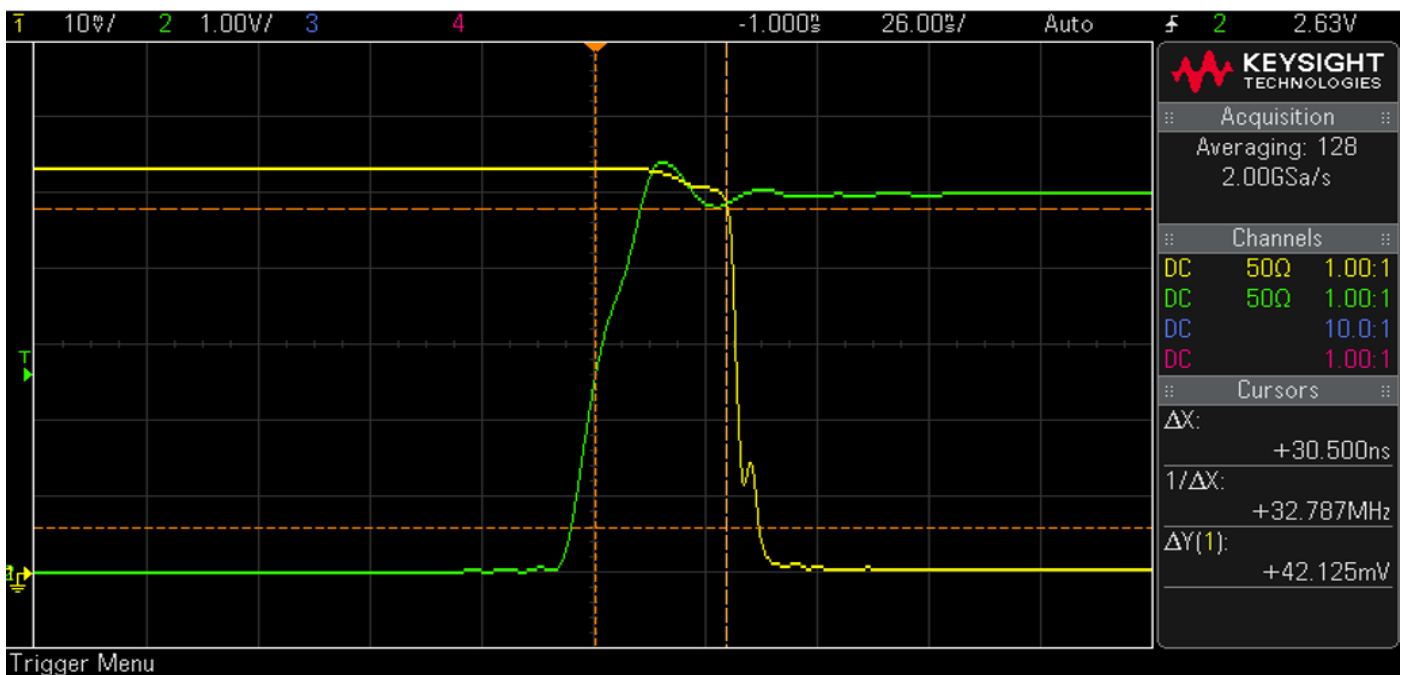

RF signal TTL signal

TYPICAL CHARACTERISTICS ON PMSN-3DR-05-STANDARD-LV

VIDEO TRANSIENTS
RATE TTL 1 MHz Duty Cycle 50%

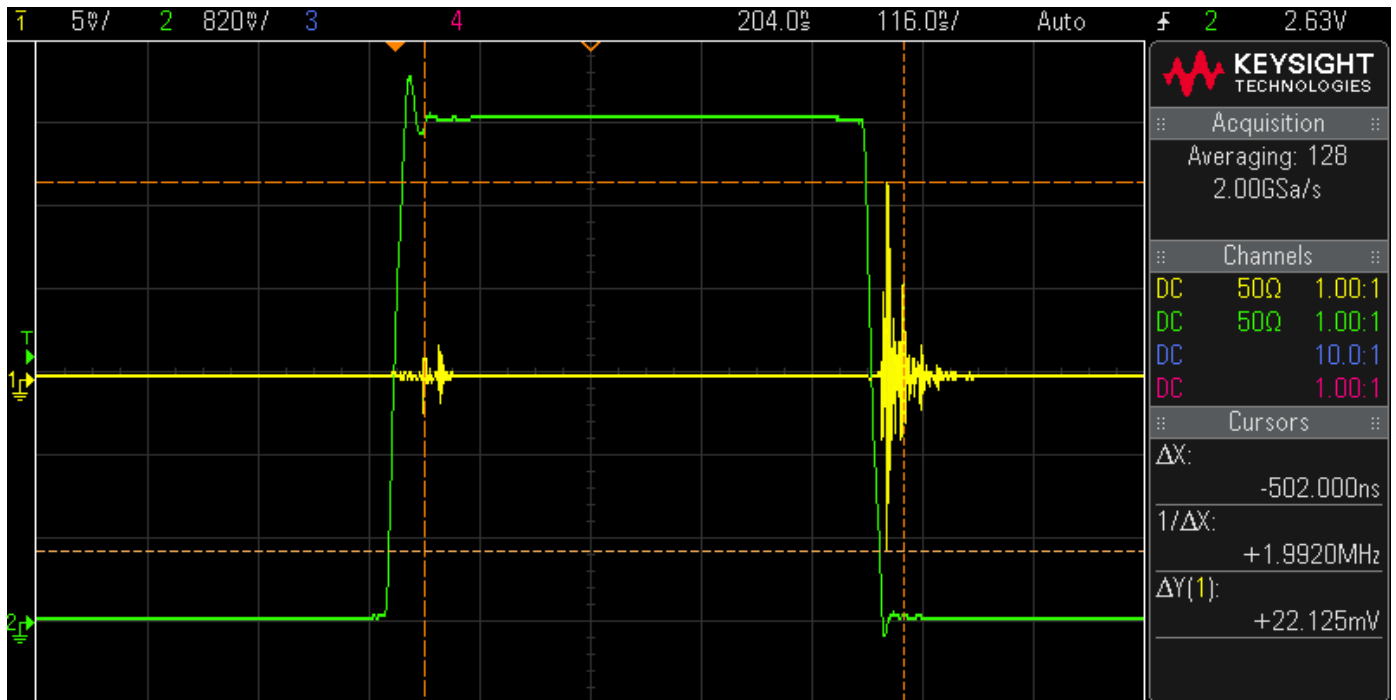

PW 0.5 μs Duty Cycle 0.1% - Freq 2 GHz. Input Power: +43 dBm (20 Watts)

