



DEMO-PMI

SUMMARY TEST DATA ON APD-8-0R520G-292FF

Customer: DEMO-PMI
 SO No: _____
 Model No: APD-8-0R520G-292FF
 Serial No: DEMO-PMI

Tested By: SEAN HERATY
 Temperature: +25 °C
 Date: 10/1/2020
 Drawing No: 27639020 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	1 GHz – 20 GHz	1 GHz – 20 GHz	PMI QA 2
2	Insertion Loss	0.5 to 1 GHz – 2.0 dB Max.	1.45 dB	
		1 to 2 GHz – 2.0 dB Max.	1.62 dB	
		2 to 8 GHz - 2.0 dB Max.	1.82 dB	
		8 to 18 GHz - 3.2 dB Max.	2.86 dB	
		18 to 20 GHz - 5.0 dB Max.	4.81 dB	
			See Graphs	
3	Insertion Loss Flatness (Ref Line of Best Fit)	0.5 to 20GHz - ± 1 dB Max.	± 0.8 dB	
		1.0 to 20 GHz - ± 1 dB Max	± 0.8 dB	
		2.0 to 20 GHz - ± 1 dB Max	± 0.7 dB	
		0.5 to 18 GHz - ± 1 dB Max	± 0.8 dB	
		1.0 to 18GHz - ± 1 dB Max	± 0.8 dB	
			± 0.7 dB	
			See Graphs	
4	VSWR Input	0.5 to 1 GHz – 2.3:1 Typ.	2.32 :1	
		1 to 2 GHz – 2.6:1 Max.	2.45 :1	
		2 to 8 GHz - 2.1:1 Max.	2.01 :1	
		8 to 18 GHz - 2.0:1 Max.	1.88 :1	
		18 to 20 GHz - 2.0:1 Max.	2.04 :1	
			See Graphs	
5	VSWR /Output	0.5 to 1 GHz – 1.5:1 Max.	1.28 :1	
		1 to 2 GHz – 1.5:1 Max.	1.22 :1	
		2 to 8 GHz - 1.7:1 Max.	1.64 :1	
		8 to 18 GHz - 1.8:1 Max.	1.69 :1	
		18 to 20 GHz - 2.0:1 Max.	1.74 :1	
			See Graphs	
6	Isolation	0.5 to 1 GHz – 10 dB Typ.	6.36 dB	
		1 to 2 GHz – 10 dB Typ.	11.21 dB	
		2 to 8 GHz - 20 dB Typ.	19.84 dB	
		8 to 18 GHz - 20 dB Typ.	17.08 dB	
		18 to 20 GHz - 15 dB Typ.	12.89 dB	
			See Graphs	
7	Amplitude Balance	0.5 to 1 GHz – ± 0.5 dB Max.	0.21 dB (±)	
		1 to 2 GHz – ± 0.5 dB Max.	0.18 dB (±)	
		2 to 8 GHz - ± 0.3 dB Max.	0.12 dB (±)	
		8 to 18 GHz - ± 0.5 dB Max.	0.39 dB (±)	
		18 to 20 GHz - ± 1dB Max.	0.9 dB (±)	
			See Graphs	
8	Phase Balance	0.5 to 1 GHz – 5° Max.	1.56 °	
		1 to 2 GHz – 3° Max.	0.92°	
		2 to 8 GHz - 4° Max.	3.12°	
		8 to 18 GHz - 10° Max.	8.15°	
		18 to 20 GHz - 15° Typ.	10.54°	
			See Graphs	
9	Average Power	25 Watts (+44dBm) (Into 1.2:1 Load VSWR)	Pass See Typical Characteristics	PMI QA 2



Note: Amplitude and phase balance are relative to J2 Port.

QA/QC Approval: PMI QA 2 Date: 10/12/20

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@pmi-rf.com




**SUMMARY TEST DATA
ON
APD-8-0R520G-292FF**

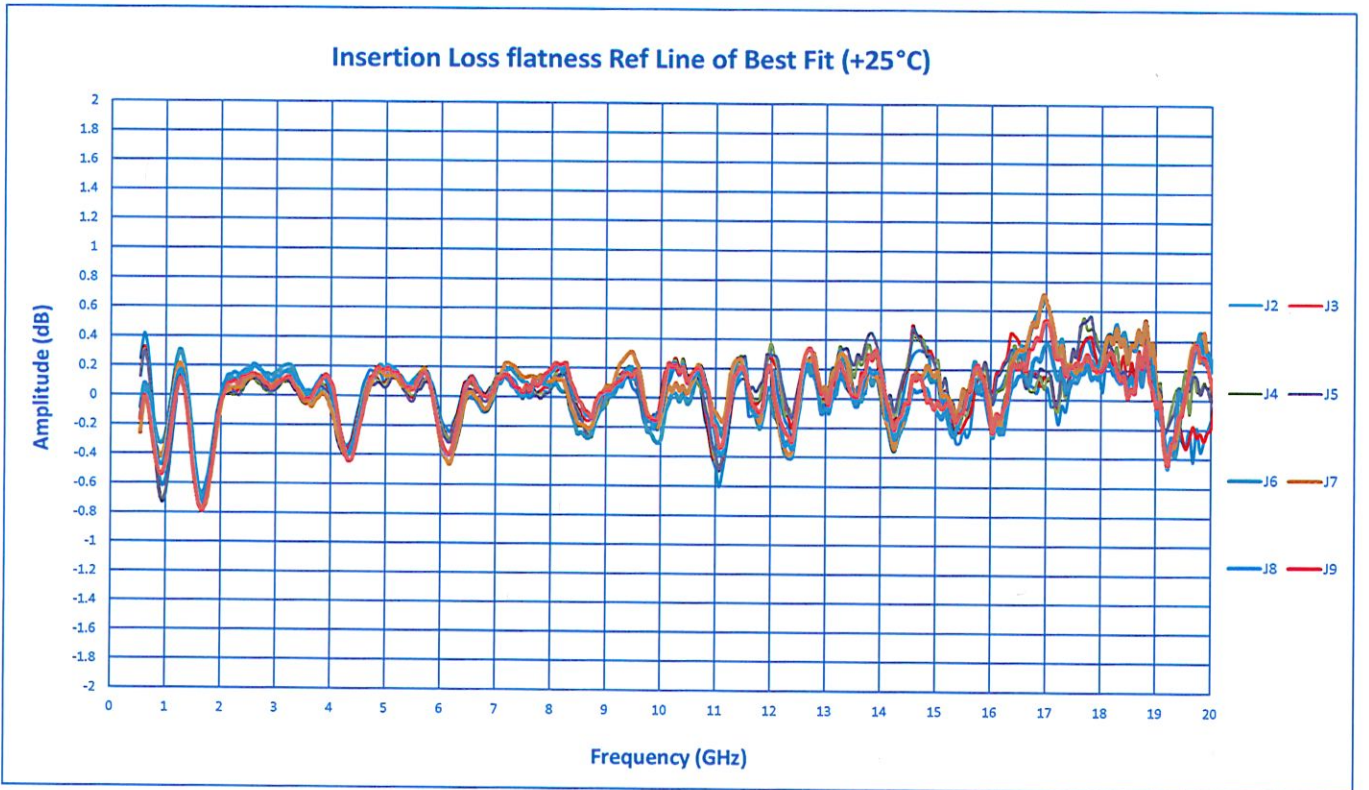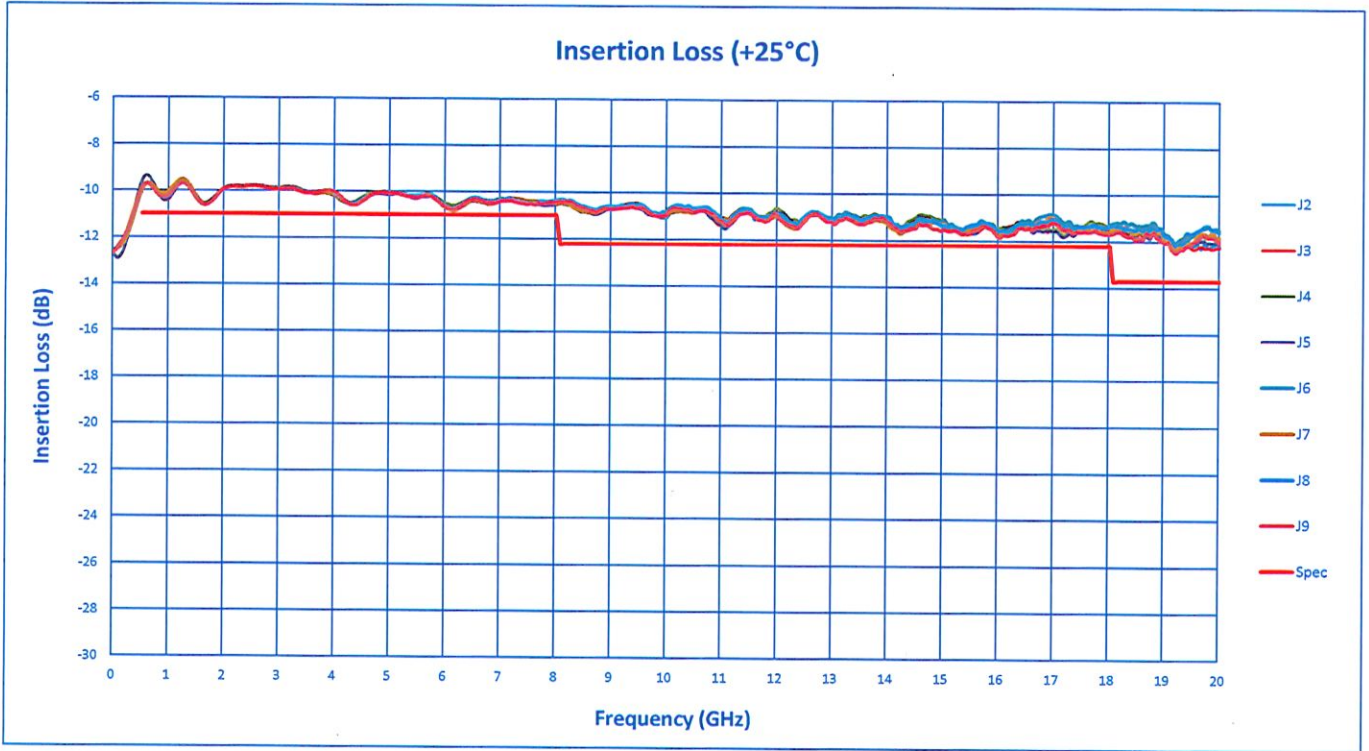





**SUMMARY TEST DATA
ON
APD-8-0R520G-292FF**

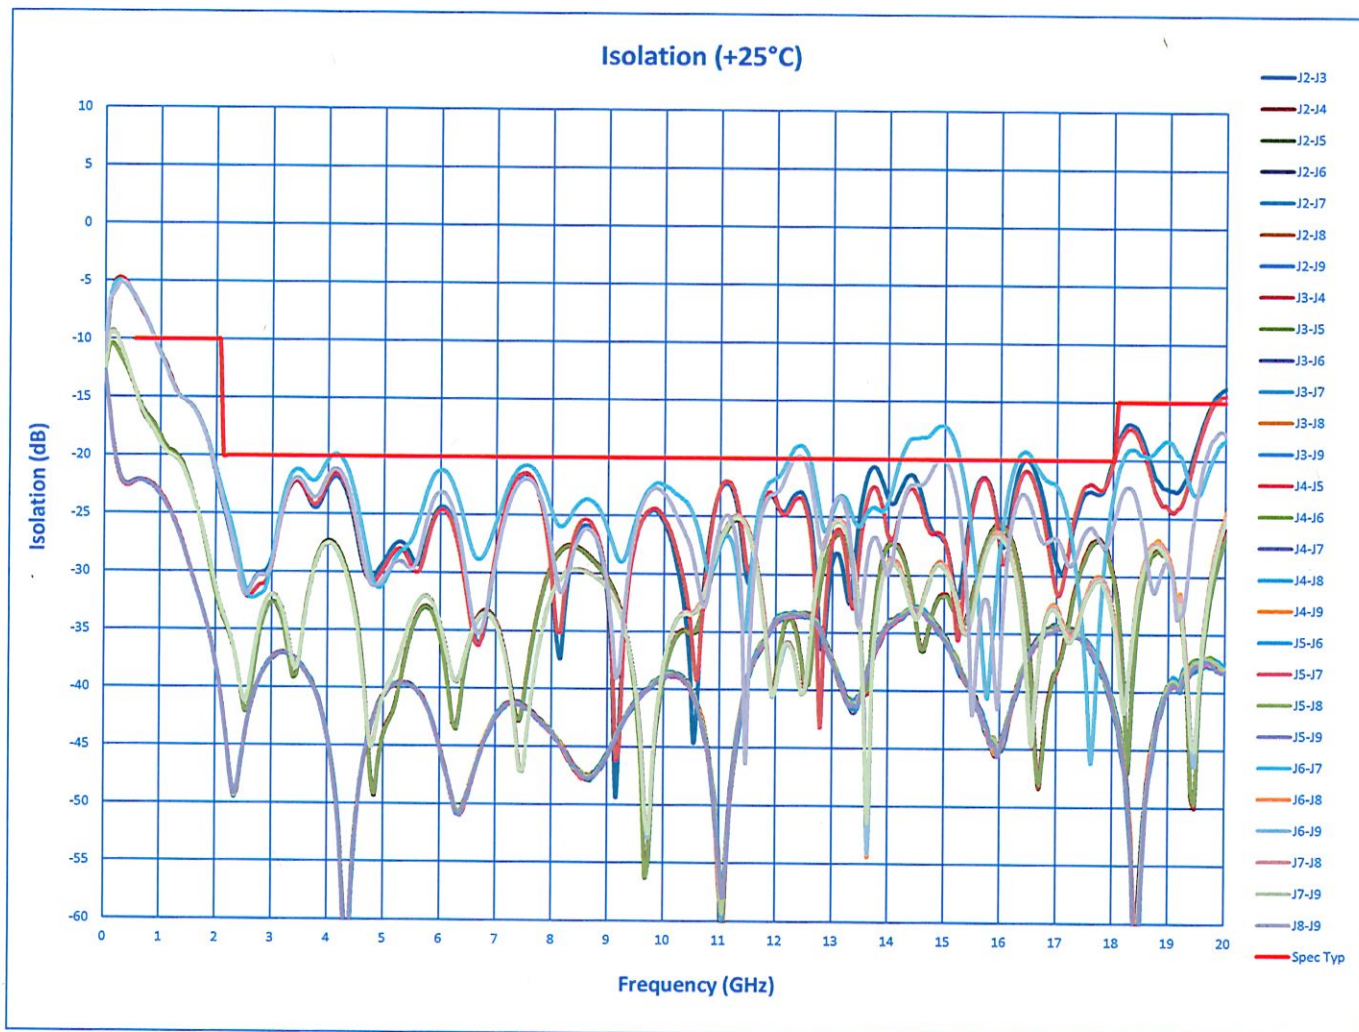



SUMMARY TEST DATA ON APD-8-0R520G-292FF

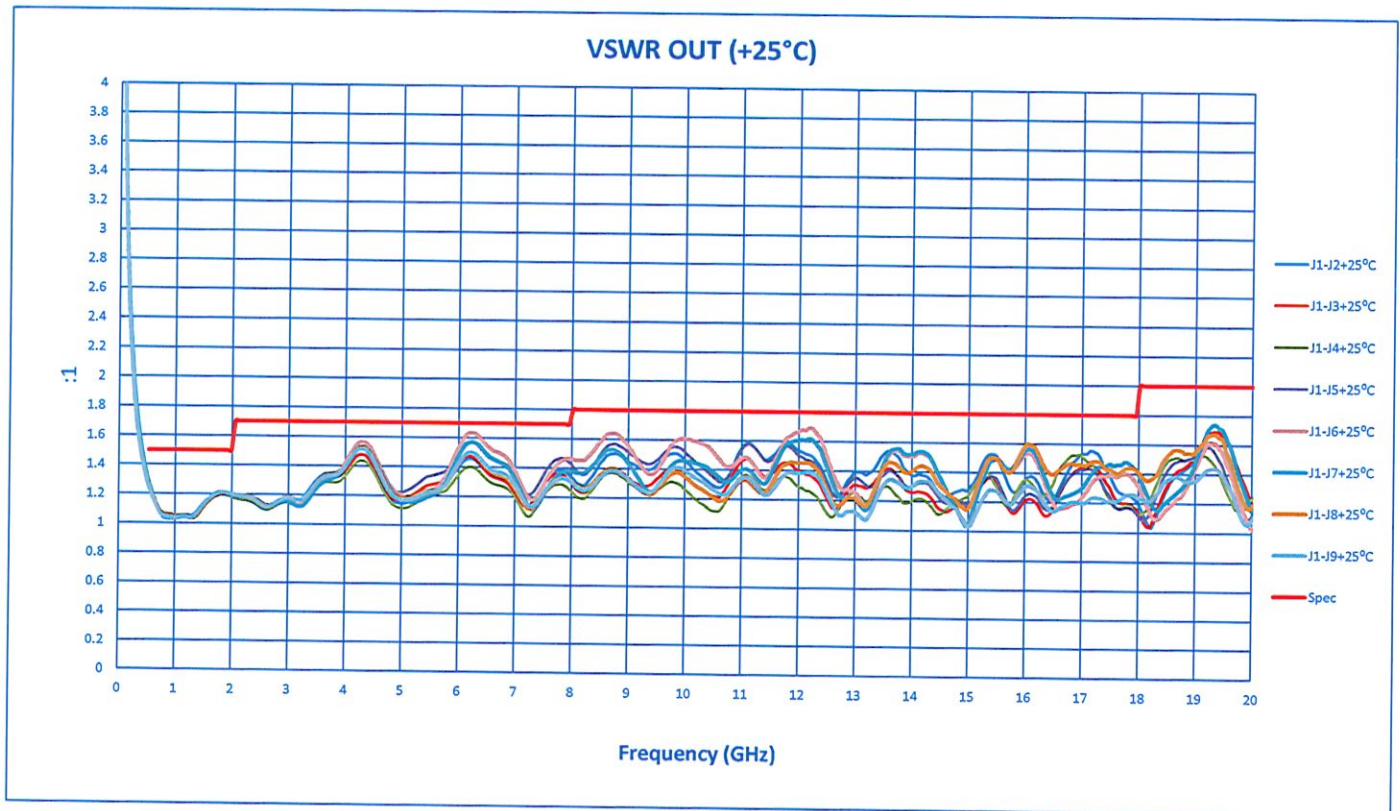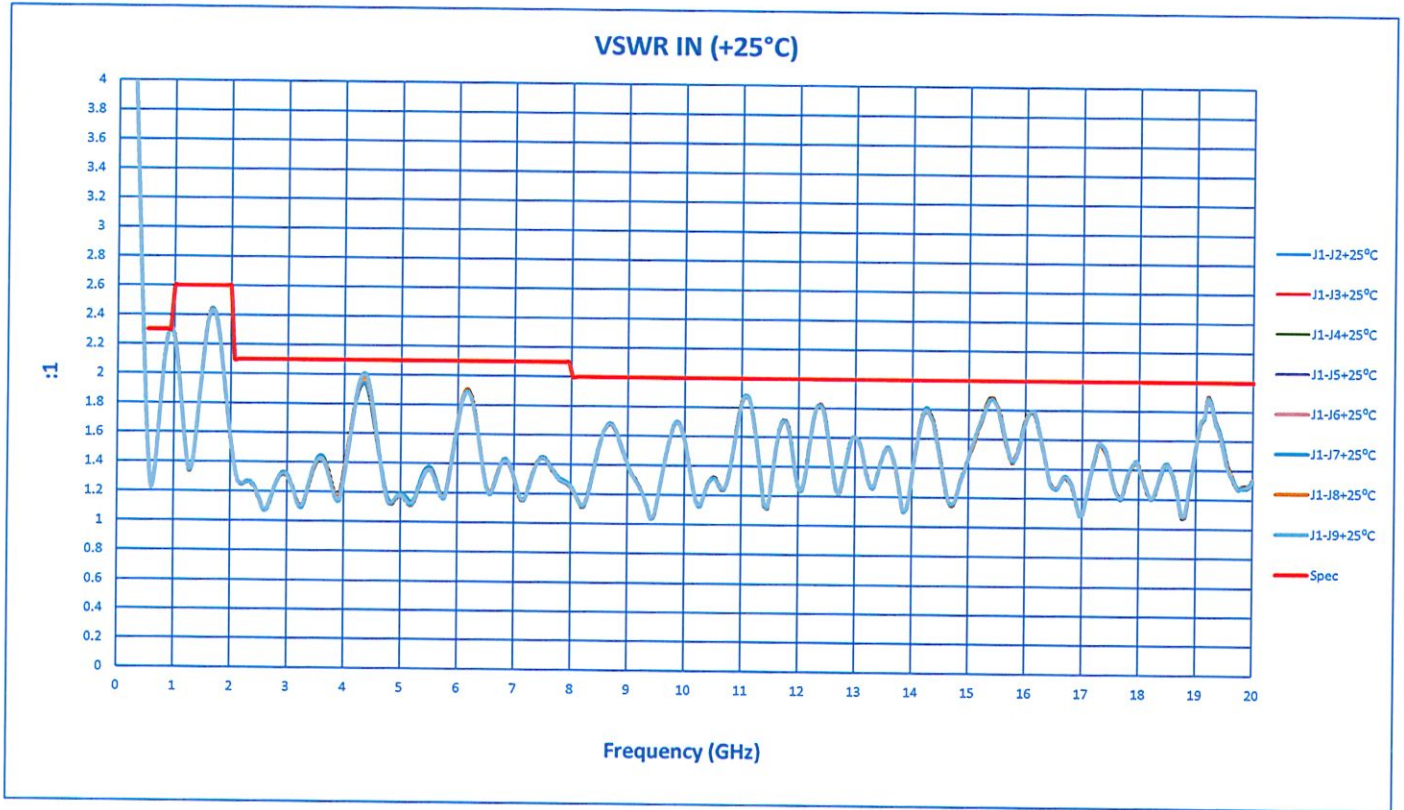



**SUMMARY TEST DATA
ON
APD-8-0R520G-292FF**

