

**SUMMARY TEST DATA
ON
DTA-100M40G-30-CD-1-BCD**

Customer: _____
Job No: _____
Model No: DTA-100M40G-30-CD-1-BCD
Serial No: PL41024/2324

Tested By: K. Mansfield
Temperature: +25° C
Date: Friday, June 16, 2023
Drawing No: 27645760 **Rev:** A1




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	PASS/FAIL	QA QC
1	Frequency Range:	100 MHz to 40 GHz	100 MHz to 40 GHz	
2	Mean Attenuation Range:	30 dB	29.6 dB	
3	Insertion Loss:	5.0 dB Typ. (Up to 20 GHz) 8.0 dB Typ. (Up to 40 GHz)	4.93 dB 7.12 dB See Plot	
4	VSWR:	2.5:1 Typ.	2.42:1 See Plot	
5	Accuracy of Attenuation:	± 2.5 dB Typ.	±0.4 dB See Plot	
6	Minimum Attenuation Step:	1.0 dB	0.93 dB See Plot	
7	Power Handling Capability:	+24 dBm CW Max.	See Typical Characteristics	
8	Input 1 dB Compression:	+20 dBm Typ.	See Typical Characteristics	
9	Switching Speed:	On: 1.0 μs Max. Off: 0.5 μs Max.	See Typical Characteristics	
10	DC Supply:	+15VDC @ 50 mA Max.	34 mA	

Programed Attenuation	Attenuation	Accuracy of Attenuation	Flatness dB
dB	dB	dB	±dB
1.00	0.98	0.02	0.23
2.00	1.97	0.03	0.32
4.00	3.91	0.09	0.51
8.00	7.85	0.15	0.99
16.00	15.73	0.27	1.11

Programed Attenuation	Attenuation	Accuracy of Attenuation	Flatness dB
dB	dB	dB	±dB
5.00	4.90	0.10	0.65
10.00	9.83	0.17	1.07
15.00	14.80	0.20	1.13
20.00	19.66	0.34	1.20
25.00	24.65	0.35	1.36
30.00	29.61	0.39	1.54

QA/QC Approval: _____

Date: _____

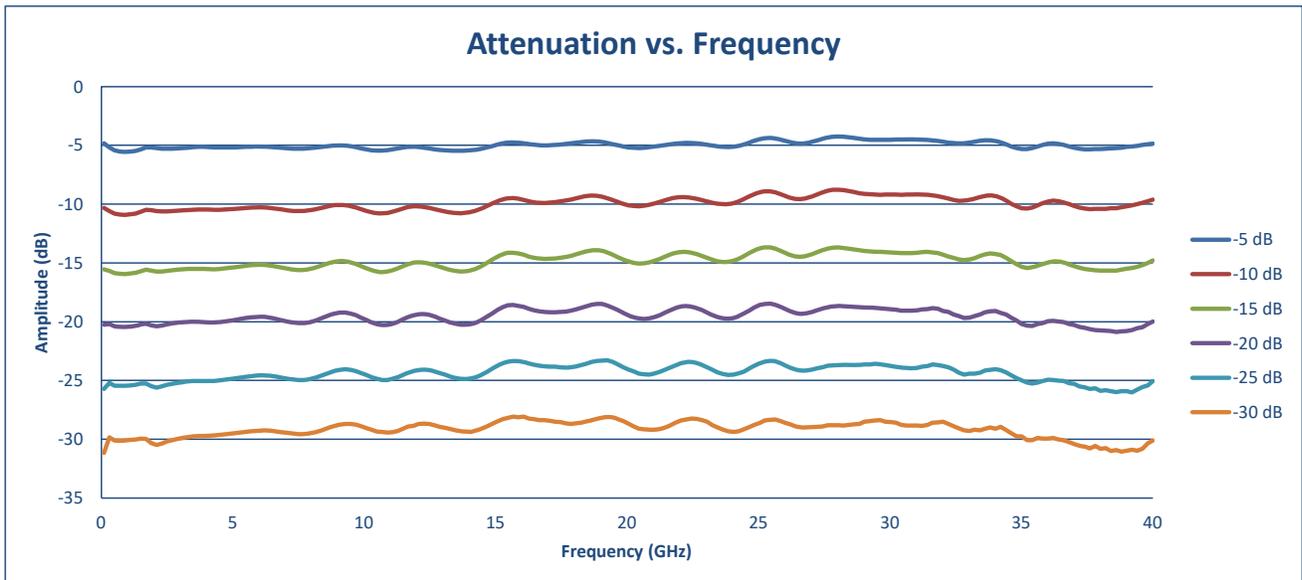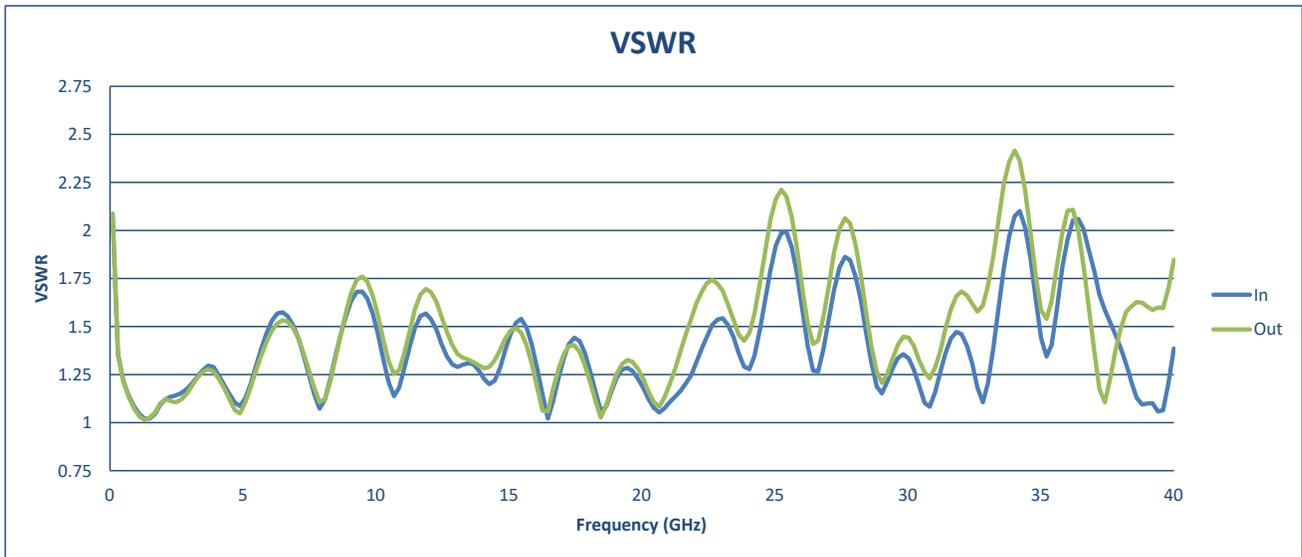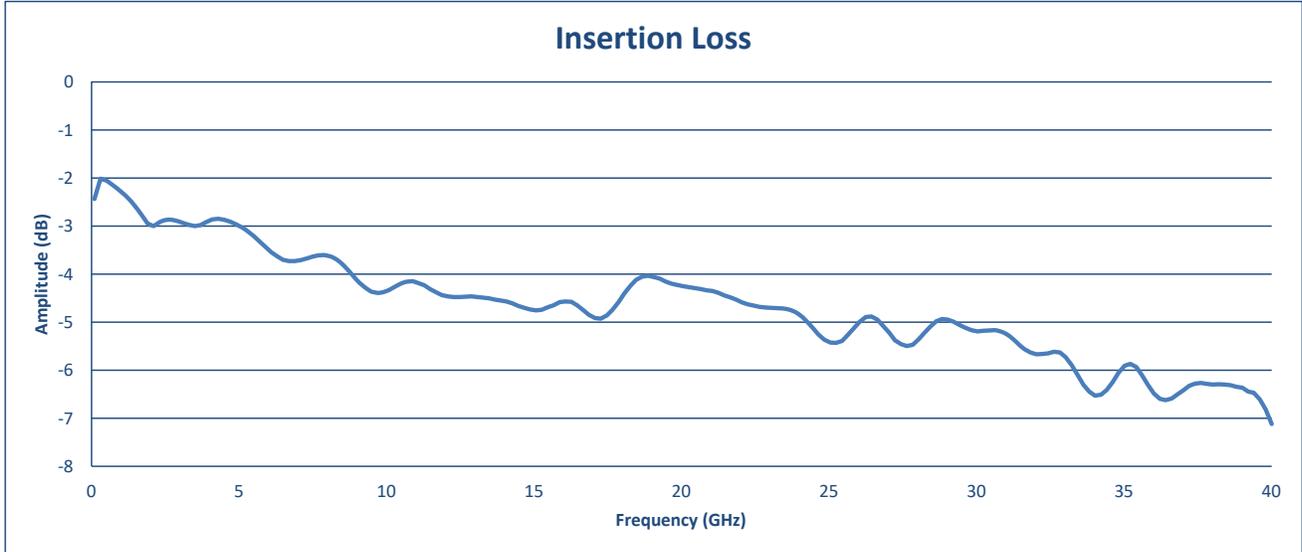

**SUMMARY TEST DATA
ON
DTA-100M40G-30-CD-1-BCD**

