



**SUMMARY TEST DATA
ON
BPF-140M-60M-SFF**

Customer: _____
 SO: _____
 Model No: BPF-140M-60M-SFF
 Serial No: PL53771/2526




Tested By: E. Kretz
 Temperature: 25°C
 Date: 7/7/2025
 Drawing No: 27651440 Rev: A1

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Passband Frequency Range	110 MHz to 170 MHz	103 MHz to 178 MHz 3 dB Passband	
2	VSWR	1.5:1 Max.	1.22:1 Max.	
3	Insertion Loss	2.0 dB Max.	1.61 dB Max.	
4	Rejection at 85 MHz	40 dB Min.	42.9 dB	
5	Rejection at 195 MHz	40 dB Min.	43 dB	
6	Passband Flatness	1.3 dB Max.	0.63 dB	
7	Input Power	1 Watt Max.	See Typical Characteristics	
8	Group Delay	60 ns MAX	See Typical Characteristics	




QA/QC Approval _____

Date: _____

**SUMMARY TEST DATA
 ON
 BPF-140M-60M-SFF**

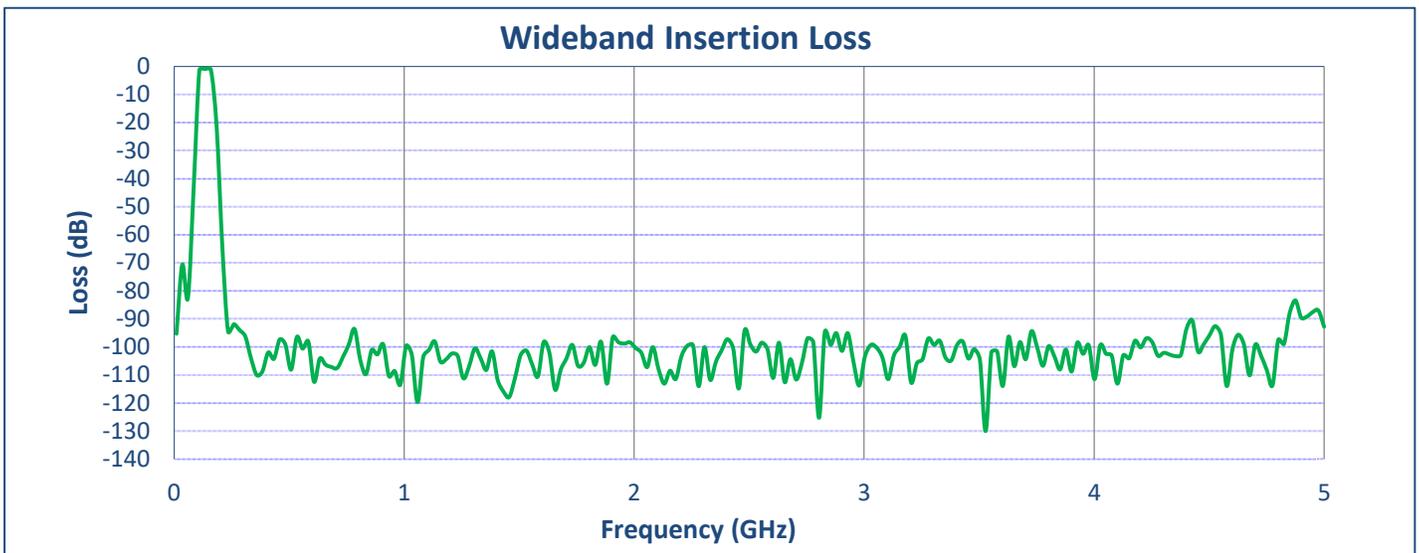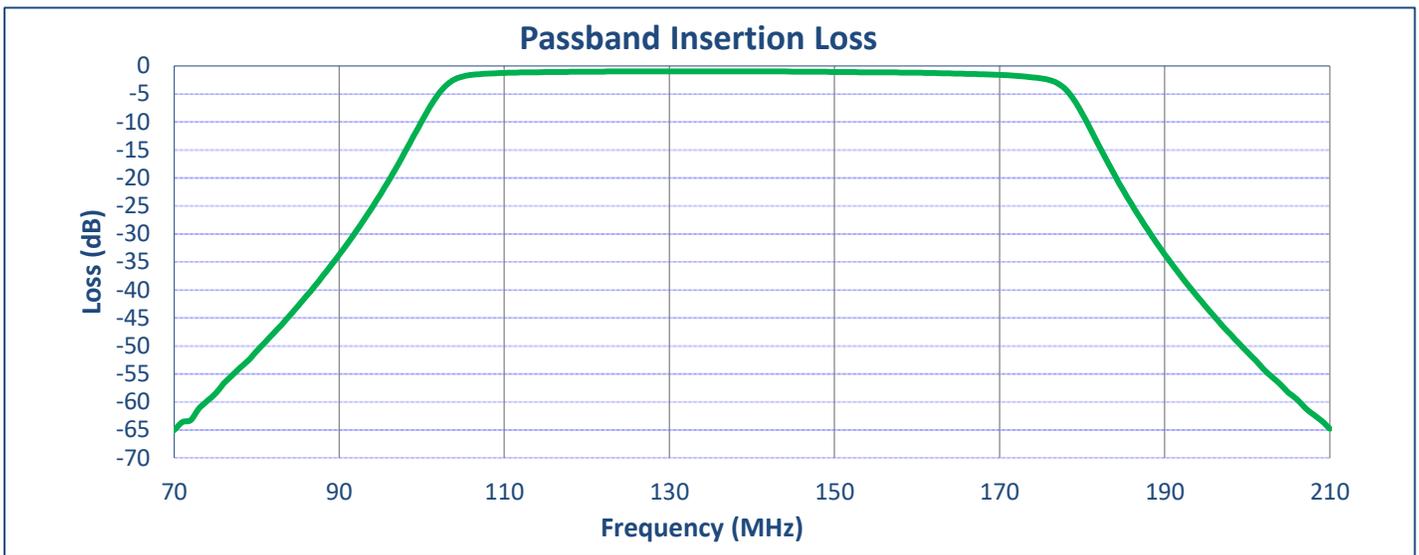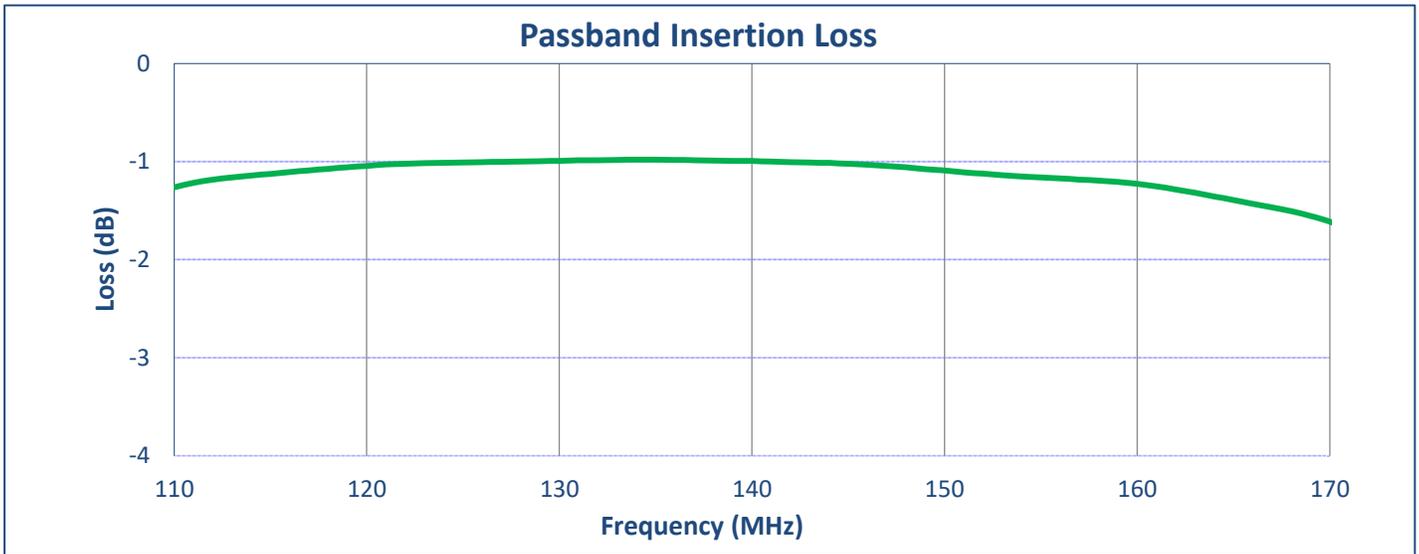

**SUMMARY TEST DATA
 ON
 BPF-140M-60M-SFF**

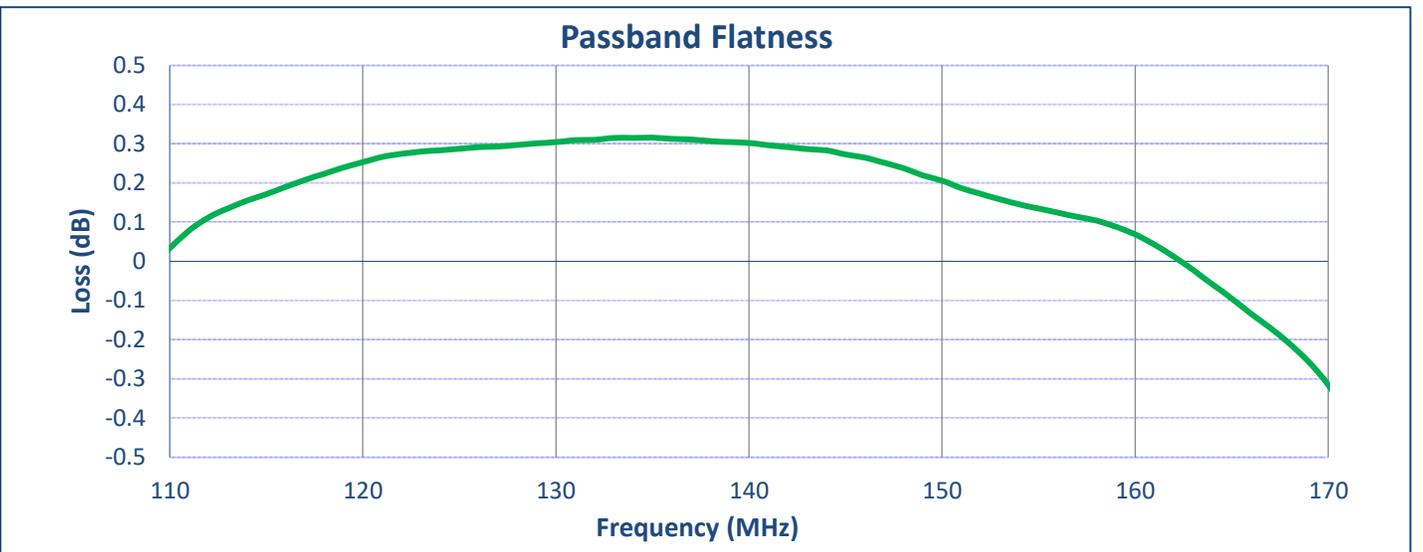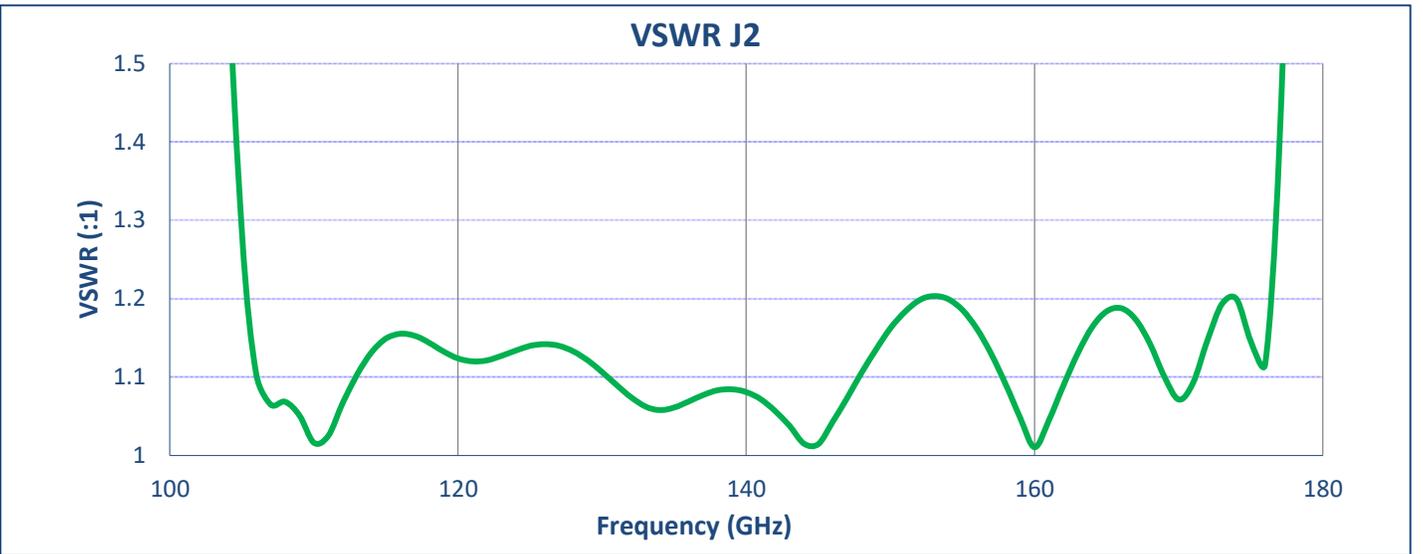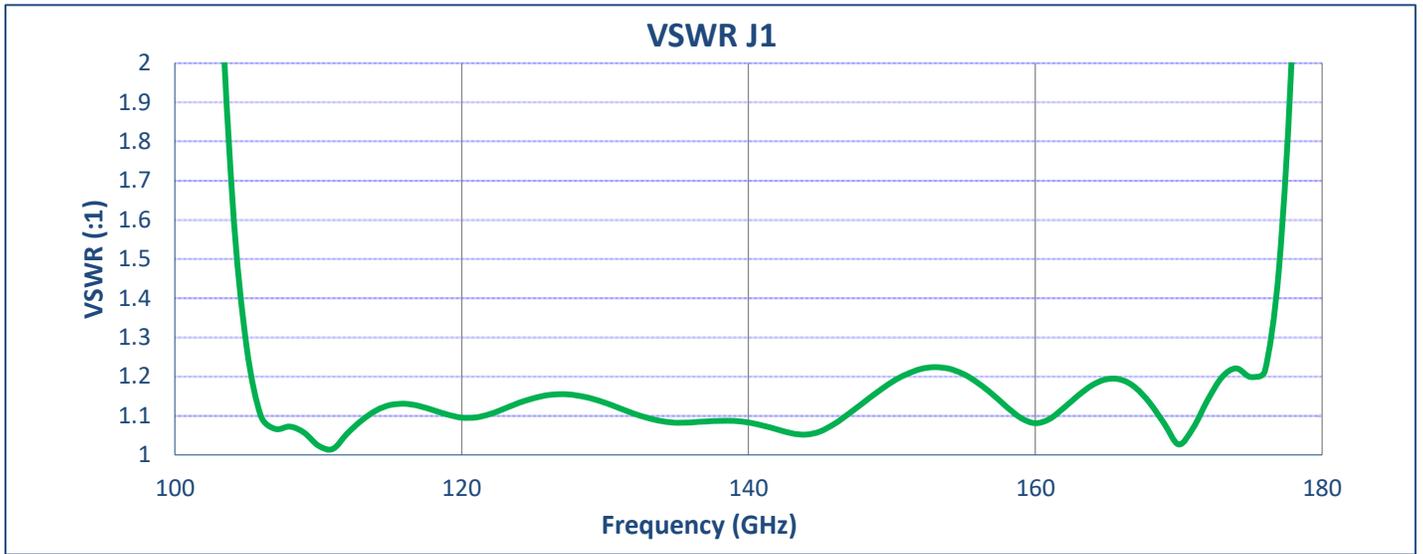

**SUMMARY TEST DATA
ON
BPF-140M-60M-SFF**

