

**SUMMARY TEST DATA  
ON  
BPF-3D5G-5G-SFF**

Customer: \_\_\_\_\_  
 SO: \_\_\_\_\_  
 Model No: BPF-3D5G-5G-SFF  
 Serial No: PL53842/2527

Tested By: E. Kretz  
 Temperature: 25°C  
 Date: 7/2/2025  
 Drawing No: 27651600 Rev: A1




TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Passband Frequency Range	1 TO 6 GHz	<b>0.9 TO 6.2 GHz</b>	
2	Insertion Loss (Passband)	2.0 dB MAX.	<b>1.2 dB</b>	
3	VSWR	1.8:1 MAX	<b>1.4:1</b>	
4	Rejection @ DC-0.8 GHz	45 dB MIN.	<b>73.5 dB</b>	
5	Rejection @ 7-12 GHz	45 dB MIN.	<b>64 dB</b>	
6	Input Power	10 W MAX.	<b>10 W MAX.</b>	

QA/AC Approval: \_\_\_\_\_

Date: \_\_\_\_\_

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
 Email: sales@quanticpmi.com

**SUMMARY TEST DATA  
ON  
BPF-3D5G-5G-SFF**

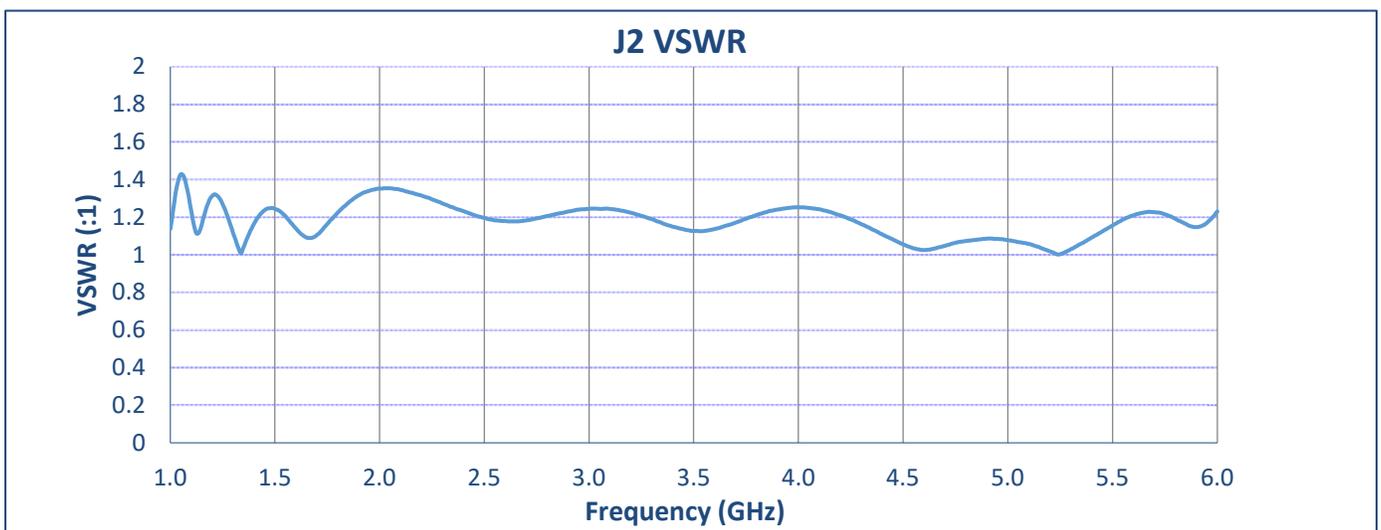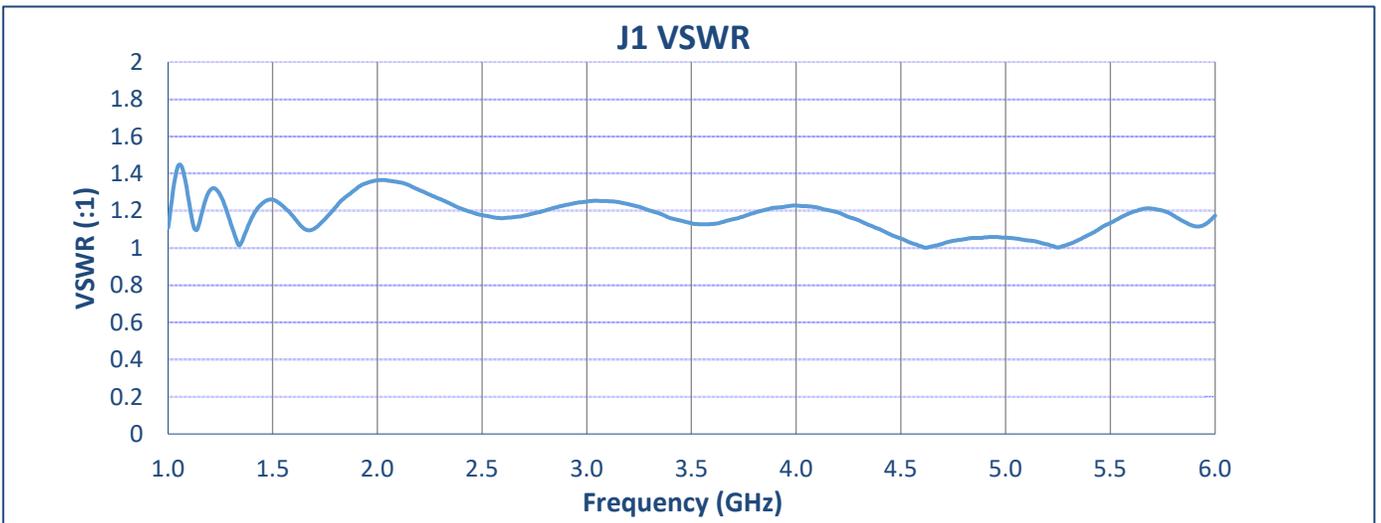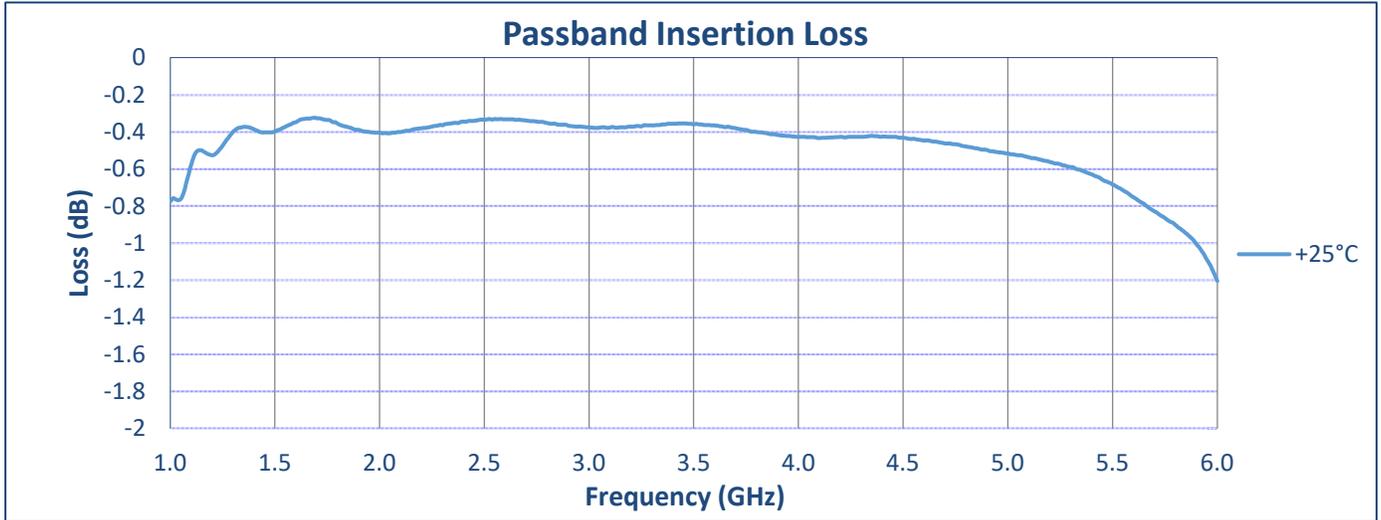

**SUMMARY TEST DATA  
ON  
BPF-3D5G-5G-SFF**

