

**SUMMARY TEST DATA
ON
P2T-10M6G-45-R-5V-SFF-HIP20W-HERM**

Customer: _____
 SO No: _____
 Model No: P2T-10M6G-45-R-5V-SFF-HIP20W-HERM
 Serial No: PL56715/2548

Tested By: K. Wagaman
 Temperature: 25°C
 Date: 12/3/2025
 Drawing No: 27651480 Rev: A1



TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	10 to 6000 MHz	10 to 6000 MHz	
2	Isolation	25 dB Typ, 20 dB Min	36 dB	
3	Insertion Loss	2.5 dB Typ, 2.8 dB Max	1.9 dB	
4	VSWR	2.0:1 Typ	1.4:1	
5	DC Voltage	+5 V @ 30 mA Typ	+5 V @ 37 mA	


QA/QC Approval: _____

Date: _____

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@quanticpmi.com

SUMMARY TEST DATA
ON
P2T-10M6G-45-R-5V-SFF-HIP20W-HERM

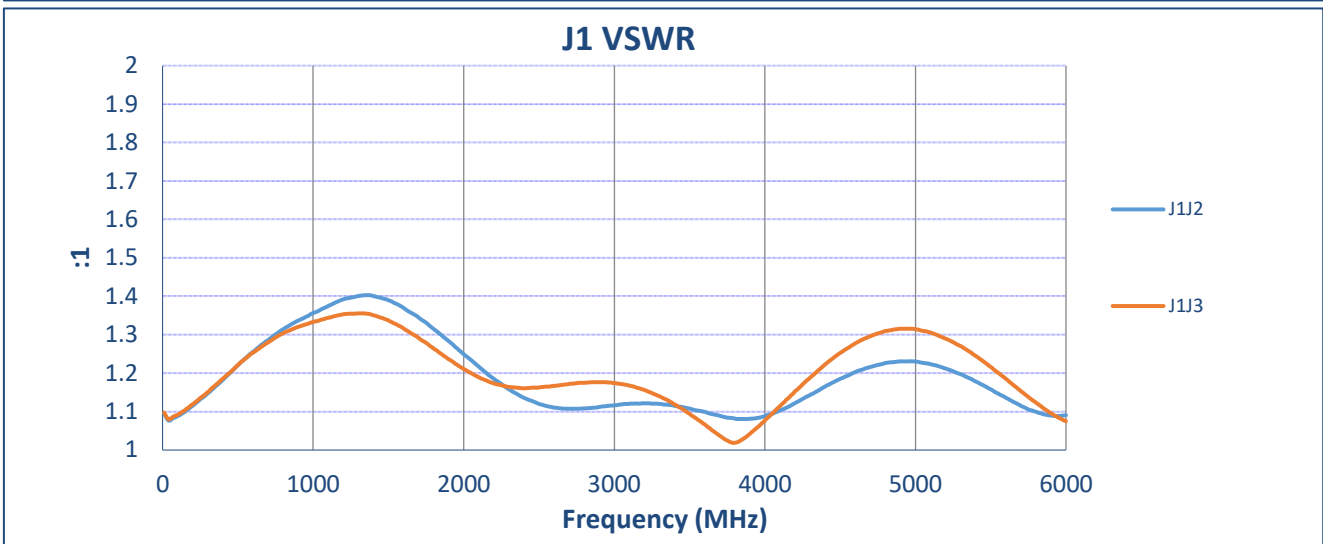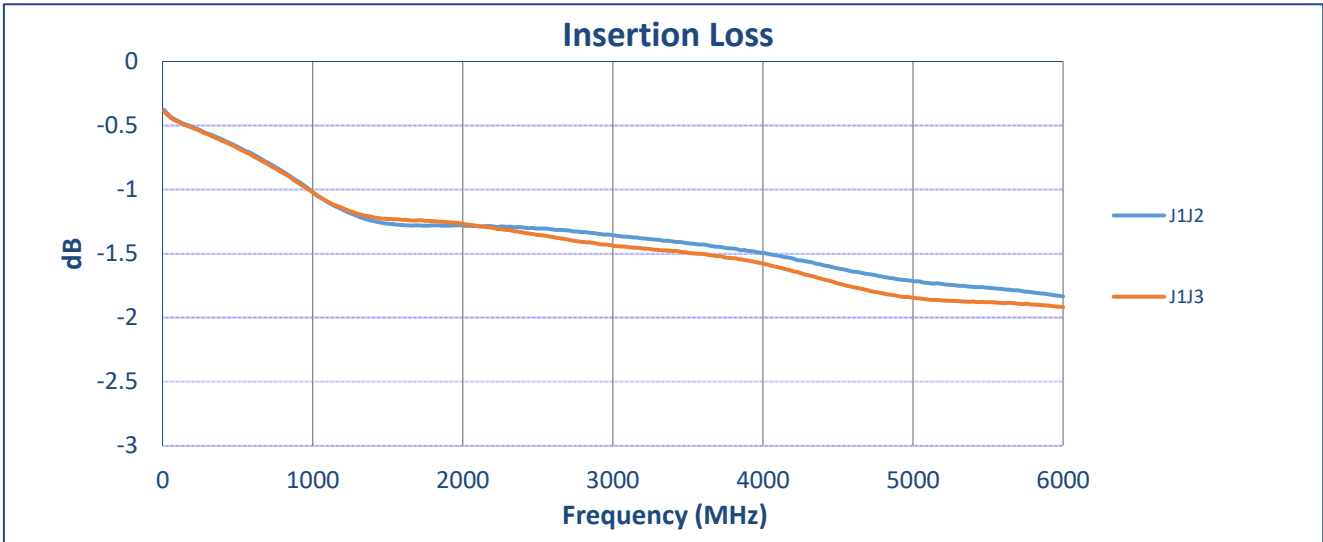

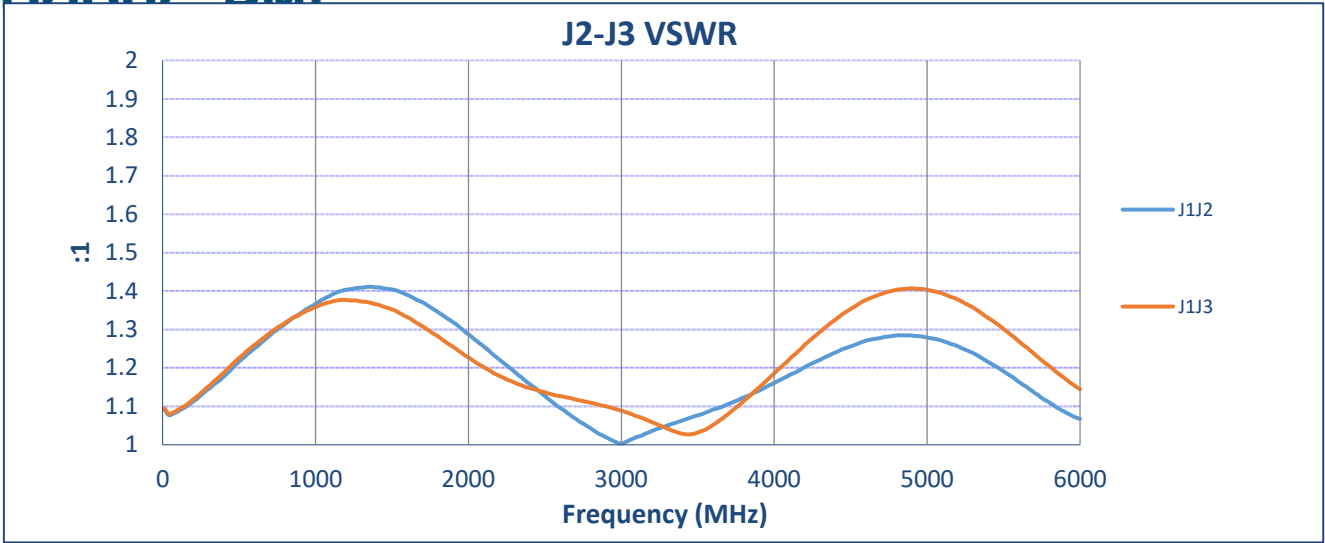

PL56715/2548

