



**SUMMARY TEST DATA
 ON
 P2T-10M6G-45-R-5V-SFF-HIP20W-HERM**


Customer:
SO No: _____
Model No: P2T-10M6G-45-R-5V-SFF-HIP20W-HERM
Serial No: PL56717/2548

Tested By: K. Wagaman
Temperature: 25°C
Date: 12/3/2025
Drawing No: 27651480 **Rev:** A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	10 to 6000 MHz	10 to 6000 MHz	
2	Isolation	25 dB Typ, 20 dB Min	35.9 dB	
3	Insertion Loss	2.5 dB Typ, 2.8 dB Max	2.3 dB	
4	VSWR	2.0:1 Typ	1.6:1	
5	DC Voltage	+5 V @ 30 mA Typ	+5 V @ 37 mA	

SUMMARY TEST DATA
ON
P2T-10M6G-45-R-5V-SFF-HIP20W-HERM

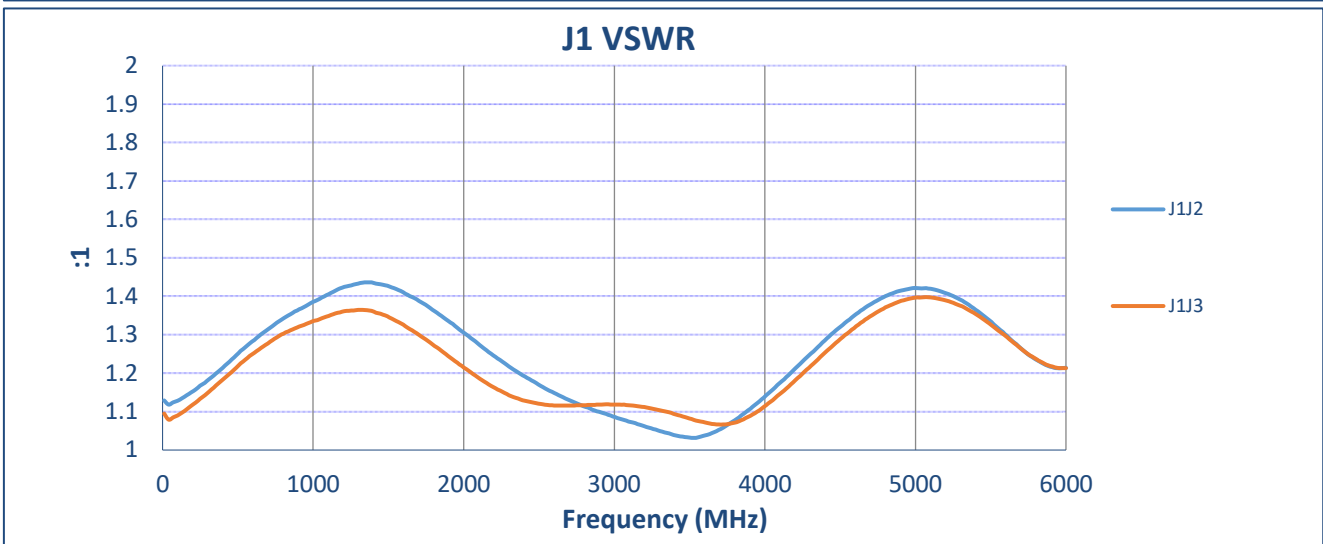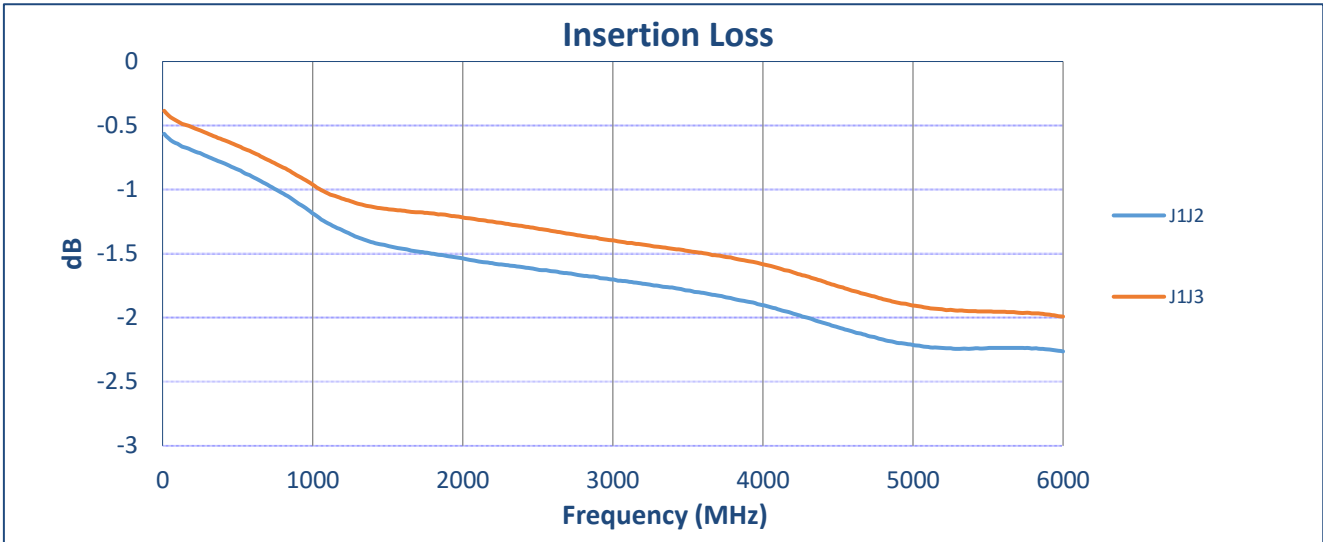

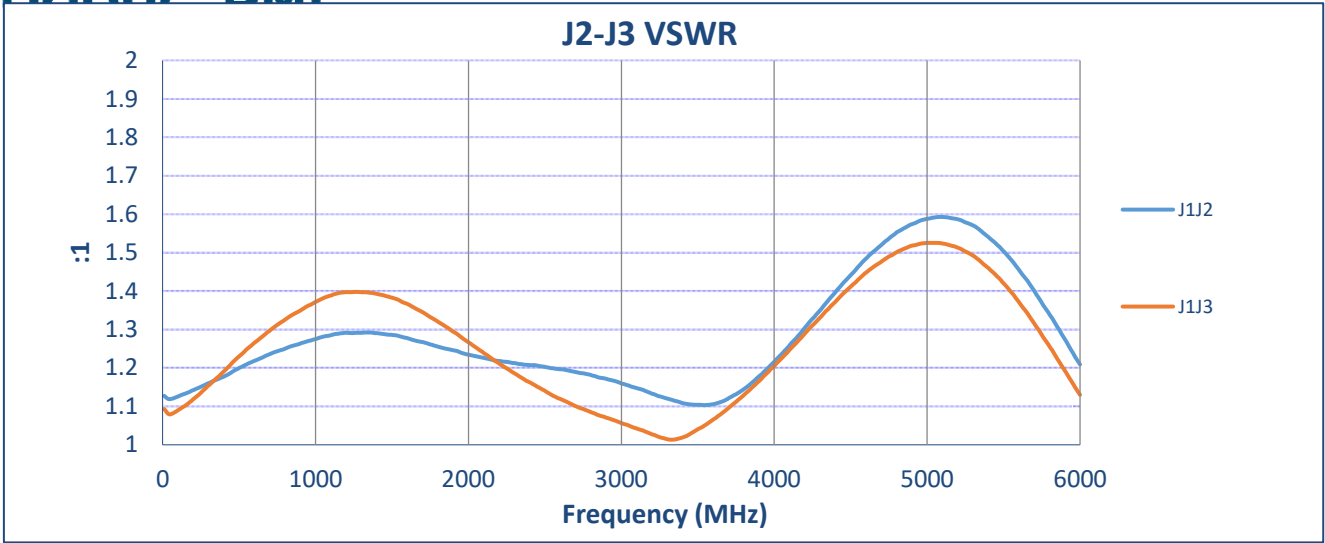

PL56717/2548

