

**SUMMARY TEST DATA
 ON
 BPF-110M140M-30M-SFF**

Customer: _____
 SO: _____
 Model No: BPF-110M140M-30M-SFF
 Serial No: PL55108/2543


Tested By: V. PRATAP
 Temperature: 25°C
 Date: 10/22/2025
 Drawing No: 27652780 Rev: A1

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Passband Frequency	110 MHz to 140 MHz	110 MHz to 140 MHz	
2	Bandwidth (-3dB)	30 MHz Min.	31.85 MHz	
3	Insertion Loss @ 125 MHz (F _O)	2 dB Max.	1.54 dB	
4	Passband Flatness	3 dB Max.	1.83 dB	
5	VSWR	1.5:1 Max.	1.28:1	
6	Rejection @ 100 MHz	40 dB Min.	52.2 dB	
7	Rejection @ 150 MHz	40 dB Min.	46.6 dB	


QA/AC Approval: _____

Date: _____

SUMMARY TEST DATA ON BPF-110M140M-30M-SFF

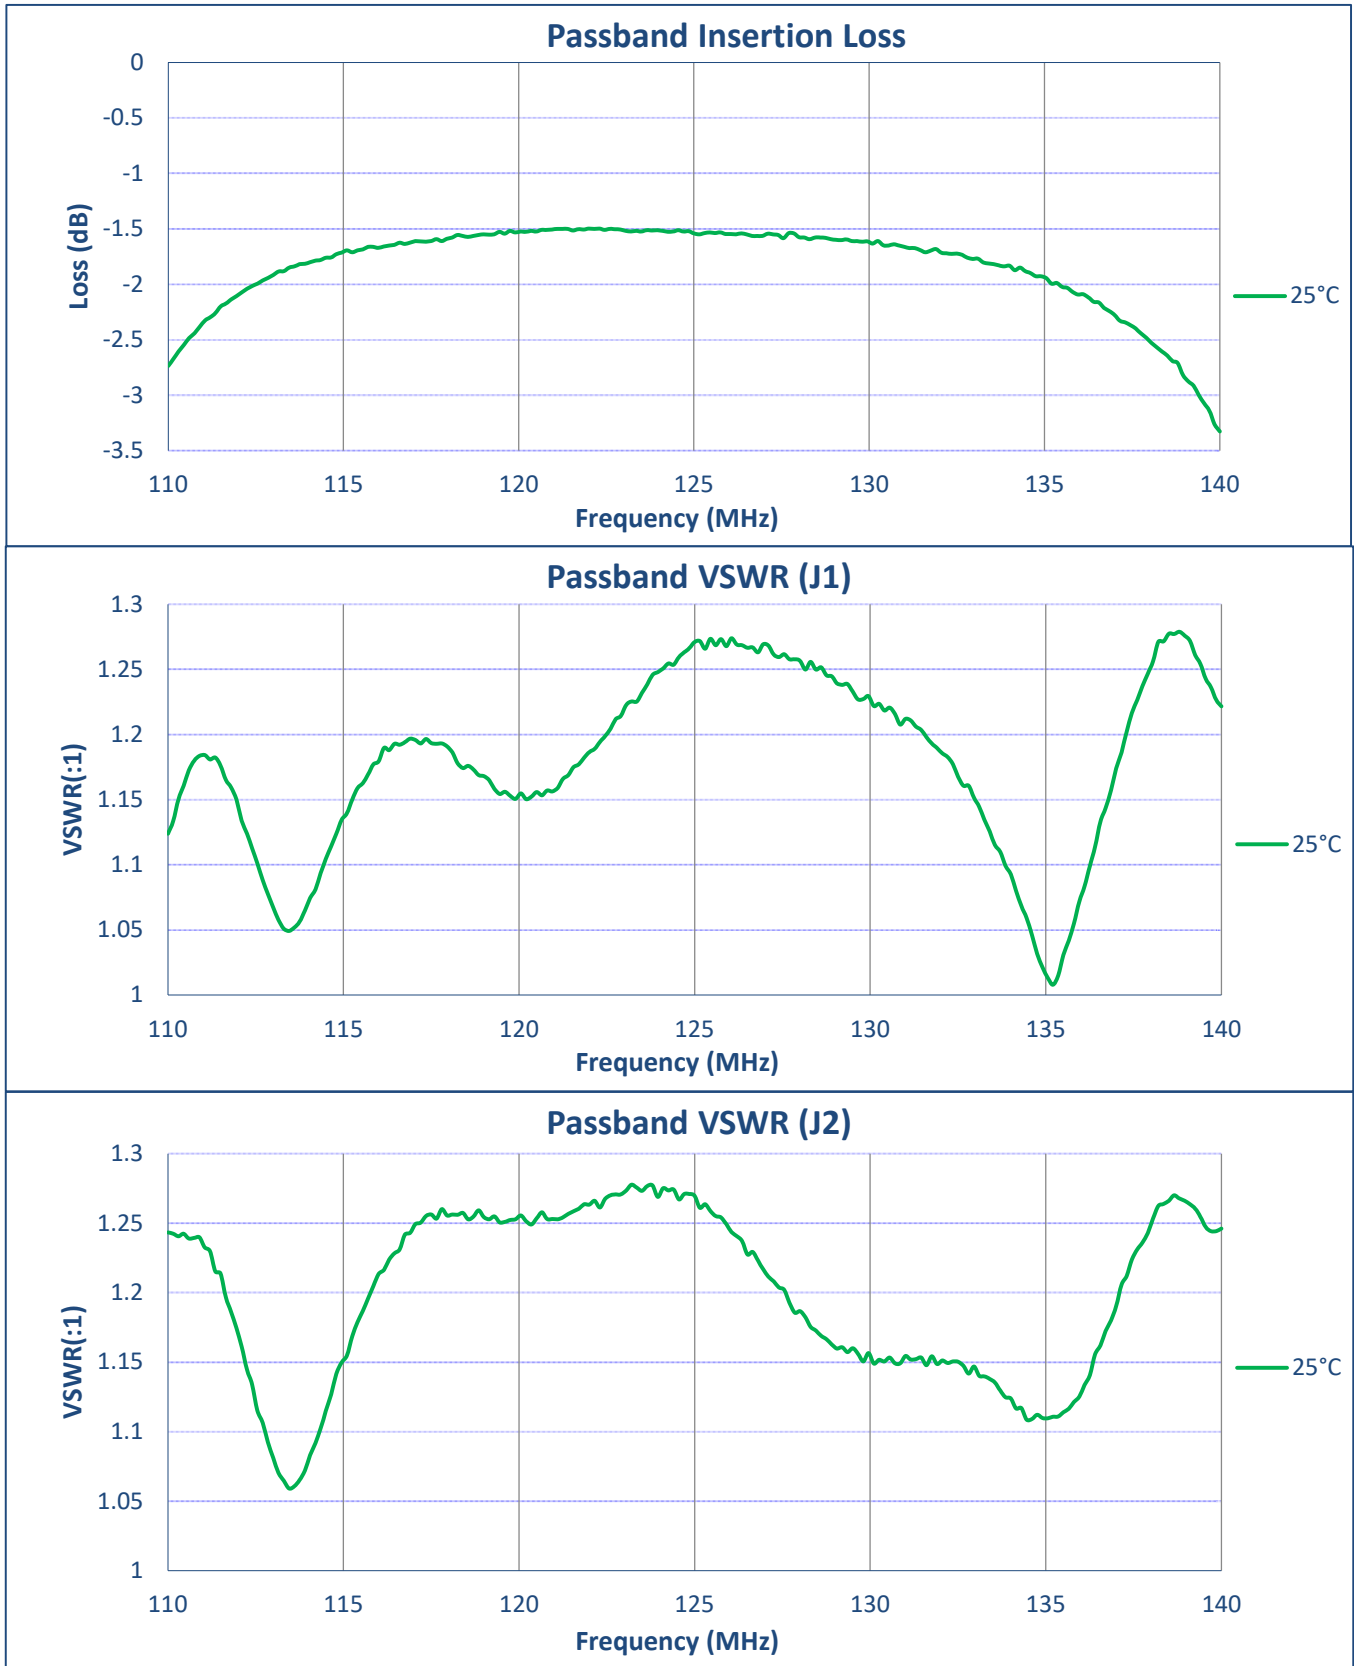

SUMMARY TEST DATA ON BPF-110M140M-30M-SFF

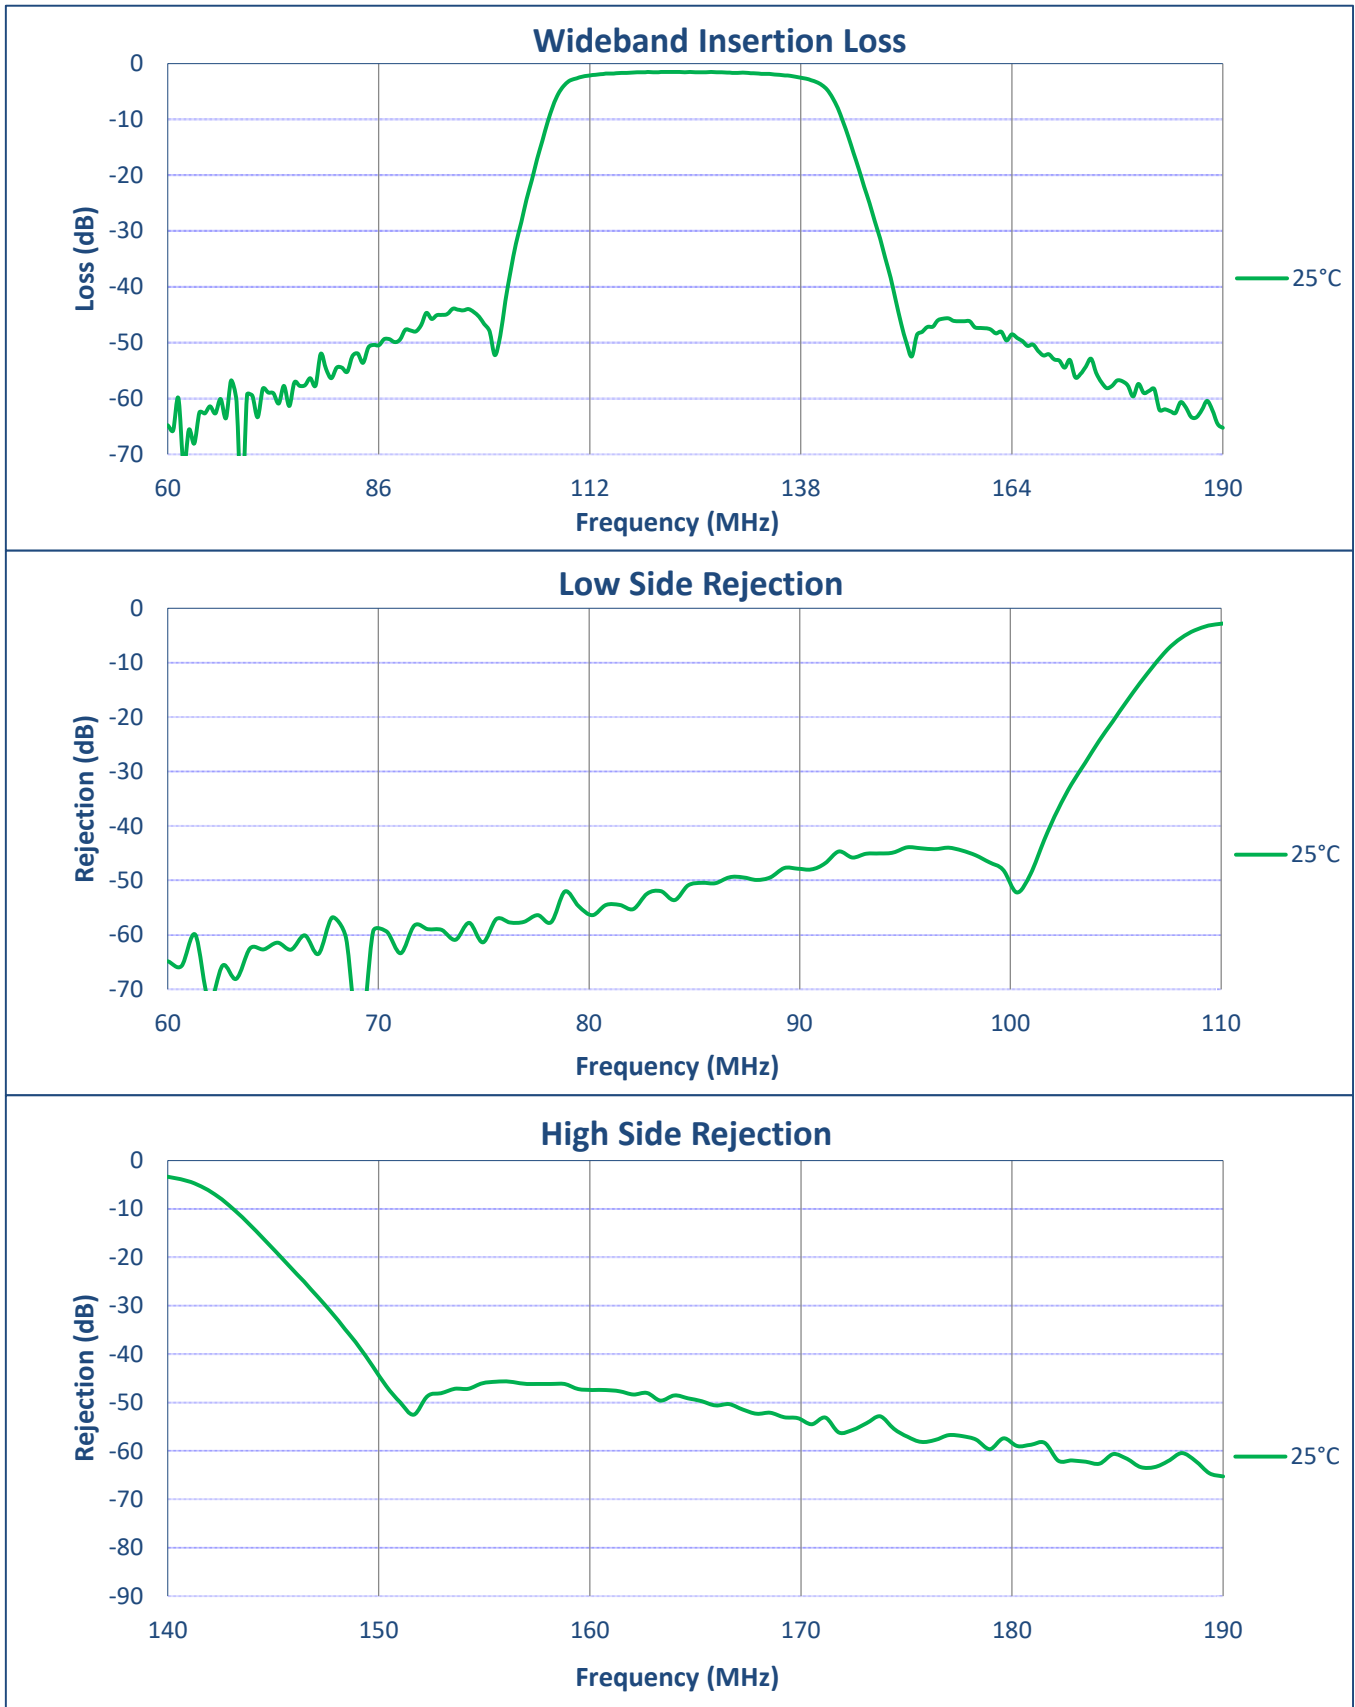

SUMMARY TEST DATA ON BPF-110M140M-30M-SFF

PL55108/2543

