

TEST REPORT

PMI MODEL No: SDLVA-61F-80

February 15, 2004



PT-52-SDLVA-PW-0204

**ENVIRONMENTAL TEST DATA  
ON  
SECESSIVE DETECTION LOG VIDEO AMPLIFIERS**

**PMI MODEL NUMBER:  
SDLVA-61F-80**

**With Options:  
5829387-002 & TBRK**

**SERIAL NUMBER PM311203**

**Environmental Testing Consisted of:**

**Sand and Dust, Salt Spray and Explosive Atmosphere (to 40,000 feet)  
These tests were conducted by BAE Systems, Lansdale, PA**

**Full EMI Testing was conducted at MET Laboratories in Union City, CA**

**Planar Monolithics Industries, Inc. 7311-G Grove Road, Frederick, MD 21704**

**Tel: 301-631-1579 Fax: 301-662-2-29**

**Email: [sales@planarmonolithics.com](mailto:sales@planarmonolithics.com) Web: [www.planarmonolithics.com](http://www.planarmonolithics.com)**

**TEST REPORT**

**PMI MODEL No: SDLVA-61F-80**

**February 15, 2004**



**PT-52-SDLVA-PW-0204**

**ENVIRONMENTAL TESTING**

**SAND AND DUST**

**SALT SPRAY**

**EXPLOSIVE ATMOSPHERE**

**TEST REPORT PREPARED BY  
BAE SYSTEMS, LANSDALE, PA**

**Planar Monolithics Industries, Inc. 7311-G Grove Road, Frederick, MD 21704**

**Tel: 301-631-1579 Fax: 301-662-2-29**

**Email: [sales@planarmonolithics.com](mailto:sales@planarmonolithics.com) Web: [www.planarmonolithics.com](http://www.planarmonolithics.com)**

TEST REPORT

PMI MODEL No: SDLVA-61F-80

February 15, 2004



PT-52-SDLVA-PW-0204

**BAE SYSTEMS**

December 23, 2003

American Microwave Corp.  
7310 Grove Road, Suite 206  
Frederick, MD 21704

Attention: Mr. Dave Bruder

Test Report No. 03-267-3136

Reference: American Microwave Corp. Purchase Order No. 31100536

Gentlemen:

This report certifies the performance of Sand and Dust, Explosion, and Salt Spray testing on one SDLVA, Model SDLVA-61F-80, Serial Number PM311203, submitted by American Microwave Corp.

The testing was conducted in accordance with:

SAND & DUST: MIL-DTL-28875A, Paragraph 4.8.34 and MIL-STD-202G, Method 110A.

SALT SPRAY: MIL-DTL-28875A, Paragraph 4.8.33 and MIL-STD-202G, Method 101E.

EXPLOSION: MIL-DTL-28875A, Paragraph 4.8.35 and MIL-STD-202G, Method 109C.

TEST RESULTS: Most of the paint peeled off during the Salt Spray exposure. There was no other apparent external physical damage to the unit as a result of the tests. None of the operations caused ignition of the explosive atmosphere inside the explosion test chamber. The explosiveness of the chamber atmosphere was verified after each operation. The unit was returned to American Microwave Corp. for further evaluation.

A copy of the Test Logs and an Equipment List, are included in this report.

The testing was conducted at the BAE SYSTEMS Advanced Systems Product Testing Laboratory, Richardson Road, Lansdale, PA 19446, and completed on December 23, 2003.

Very truly yours,

BAE SYSTEMS Advanced Systems

  
J. F. Seltz, Test Engineer  
Product Testing Laboratory

JFS:pc

Enc

Advanced Systems 305 Richardson Road Lansdale, PA 19446-1466  
Telephone (215) 996-2000 Fax (215) 996-2088

978(12-28)5

Planar Monolithics Industries, Inc. 7311-G Grove Road, Frederick, MD 21704

Tel: 301-631-1579 Fax: 301-662-2-29

Email: [sales@planarmonolithics.com](mailto:sales@planarmonolithics.com) Web: [www.planarmonolithics.com](http://www.planarmonolithics.com)





TEST REPORT

PMI MODEL No: SDLVA-61F-80

February 15, 2004



PT-52-SDLVA-PW-0204

**PRODUCT TESTING LABORATORY TEST LOG**

JOB NO. 03 ETE-1000 CUSTOMER American Microwave P.O. NO. 31100536  
 TEST ENGINEER JFS TEST TECH. LR GSI/WITNESS \_\_\_\_\_  
 PRODUCT DESCRIPTION (Model No., Type, Ser. No., Quantity, Etc.) 1-SDLVA  
Model SDLVA-61F-80 9/11 PM311203  
 TEST DESCRIPTION (Vib., Shock, Etc.) Explosion  
 TEST PROC. MIL-DTL-28875A para 4.3.5.2 4/1. 2026 Mod 109

DATE	TIME	EVENT DESCRIPTION
12/21/03		Wire cut for operation, place unit in chamber and put TC ion unit top. This is a sealed unit, no covers removed 2 TC's on chamber wall. Fuel will be n-hexane seal chamber up.
	1615	start chamber, set for 71°C
12/22/03	0740	unit at 70°C chamber wall 71°C start test for 5,000ft
	0742	Inject fuel
	0745	Ran test explosion, test satisfactory. Power out up, start altitude drift
	0815	End of test for 5,000ft, Ran test explosion, test satisfactory, Power out down
	0818	start test for 20,000ft
	0822	Inject fuel
	0825	Ran test explosion, test satisfactory. Power out up and start altitude drift.
	0855	End of test for 20,000ft, test explosion satisfactory. Power out down
	0858	start test for 40,000ft
	0912	Inject fuel
	0915	Ran test explosion, test satisfactory, Power out up, start altitude drift.
	0945	End of test for 40,000ft, test explosion satisfactory, Unit did not cause chamber to explode. Remove unit from chamber

1130-00796

PAGE 1 OF 1

Planar Monolithics Industries, Inc. 7311-G Grove Road, Frederick, MD 21704

Tel: 301-631-1579 Fax: 301-662-2-29

Email: [sales@planarmonolithics.com](mailto:sales@planarmonolithics.com) Web: [www.planarmonolithics.com](http://www.planarmonolithics.com)

TEST REPORT

PMI MODEL No: SDLVA-61F-80

February 15, 2004



PT-52-SDLVA-PW-0204

EQUIPMENT LIST

<u>EQUIPMENT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>BAE NO.</u>	<u>CAL. DUE</u>
<b>SAND &amp; DUST TEST</b>				
Sand & Dust Chamber	Itemco	----	8943	Each Use
Dust Density Meter	Photomation	DSM-1PB	17544	04 JUN 04
Temp. and Humidity Indicator	Rotronic	HP101A-K	21160	12 SEP 04
Temp. Indicator	Doric	400	12393	02 APR 04
Air Velocity Meter	Hastings	AAB-27	19637	16 OCT 04
<b>SALT SPRAY TEST</b>				
Salt Spray Chamber	Singleton	24-17347	16239	Each Use
Temp. Indicator	Doric	400	21410	01 JUL 04
Hydrometer	A.H. Thomas	6025-M10	13613	09 MAY 04
Hydrometer	A.H. Thomas	6025-R10	18570	12 SEP 04
pH Meter	Fisher	800	14284	21 MAR 04
Temp. Indicator	Doric	400	99990	17 JAN 04
<b>EXPLOSION TEST</b>				
Explosion Chamber	Associated	EX40-ABC	8771	09 MAR 04
Temp. Indicator	Doric	400	21410	01 JUL 04
Multimeter	Fluke	75 III	21394	03 JUN 04

The above equipment was calibrated by standards which are regularly calibrated and whose accuracies are traceable to the National Institute of Standards and Technology (NIST). The calibration system and procedure maintained by BAE SYSTEMS Advanced Systems are in compliance with the requirements of ANSI/NCSL Z540-1, ISO 9002, ISO 10012-1, and MIL-STD-45662A.

Test Report No. 03-267-3136

Planar Monolithics Industries, Inc. 7311-G Grove Road, Frederick, MD 21704

Tel: 301-631-1579 Fax: 301-662-2-29

Email: [sales@planarmonolithics.com](mailto:sales@planarmonolithics.com) Web: [www.planarmonolithics.com](http://www.planarmonolithics.com)

**TEST REPORT**

**PMI MODEL No: SDLVA-61F-80**

**February 15, 2004**



**PT-52-SDLVA-PW-0204**

## **EMI TESTING**

**TEST REPORT PREPARED BY**

**MET LABORATORIES, UNION CITY, CA**

**Planar Monolithics Industries, Inc. 7311-G Grove Road, Frederick, MD 21704**

**Tel: 301-631-1579 Fax: 301-662-2-29**

**Email: [sales@planarmonolithics.com](mailto:sales@planarmonolithics.com) Web: [www.planarmonolithics.com](http://www.planarmonolithics.com)**



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*  
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

**Electromagnetic Compatibility Criteria  
Test Report**

for the

**Planar Monolithics Industries, Inc.  
Successive Detection Log Video Amplifier**

Verified under  
the rules contained in  
MIL-STD-461C/462

**MET Report: EMCU14749-MIL**

March 8, 2004

**Prepared For:**

**Planar Monolithics Industries, Inc.  
7311-G Grove Road  
Fredrick, MD 21704**

**Prepared By:**  
**MET Laboratories, Inc.**  
33439 Western Ave.  
Union City, California 94587



**Electromagnetic Compatibility Criteria  
Test Report**

for the

**Planar Monolithics Industries, Inc.  
Successive Detection Log Video Amplifier**

**Tested Under**

the rules contained in  
MIL-STD-461C/462  
EMC Requirements

**Testing Performed By:**

*Asad Bajwa*

Asad Bajwa, Manager  
Electromagnetic Compatibility Lab

**Report Prepared By:**

*Cheryl Anicete*

Cheryl Anicete  
Documentation Department



## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	March 8, 2004	Initial Issue.

**DRAFT**



## Table of Contents

<b>I.</b>	<b>Executive Summary</b> .....	<b>1</b>
A.	Purpose of Test .....	2
B.	Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration</b> .....	<b>3</b>
A.	Overview .....	5
B.	References .....	5
C.	Test Site .....	5
D.	Description of Test Sample .....	5
E.	Equipment Configuration .....	6
F.	Method of Monitoring EUT Operation .....	7
G.	Modifications .....	7
a)	Modifications to EUT .....	7
b)	Modifications to Test Standard .....	7
H.	Disposition of EUT .....	7
<b>III.</b>	<b>Electromagnetic Compatibility Conducted Emission and Susceptibility Criteria</b> .....	<b>8</b>
A.	CE03, Conducted Emissions, Power and Interconnecting Leads, 0.015 to 50 MHz .....	9
B.	CS01, Conducted Susceptibility, Power Leads, 30 Hz to 50 kHz .....	13
C.	CS02, Conducted Susceptibility, Power Leads, 50 kHz to 400 MHz .....	17
D.	CS04, Undesired Signal Rejection .....	20
E.	CS06, Conducted Susceptibility, Spikes, Power Leads .....	24
<b>IV.</b>	<b>Electromagnetic Compatibility Radiated Emission Criteria</b> .....	<b>28</b>
A.	RE02, Radiated Emissions, Electric Field, 14 kHz to 18 GHz .....	29
<b>V.</b>	<b>Test Equipment</b> .....	<b>35</b>

DRAFT



## List of Tables

Table 1. Executive Summary of MIL-STD-461C/462 Compliance Testing .....	2
---	---

## List of Figures

Figure 1. Block Diagram of Test Configuration .....	6
Figure 2. CE03, Setup Block Diagram .....	11
Figure 3. Limit for CS01 .....	14
Figure 4. CS01, Setup Block Diagram .....	15
Figure 5. CS02, Setup Block Diagram .....	18
Figure 6. CS04, Setup Block Diagram .....	21
Figure 7. Limit for CS04 .....	22
Figure 8. CS06, Setup Block Diagram .....	25
Figure 9. CS06, Acceptable Waveshapes .....	26
Figure 10. RE02, Setup Block Diagram .....	33

## List of Photographs

Photograph 1. CE03 Conducted Emissions, Power and Interconnecting Leads (0.015 to 50 MHz) Test Setup .....	12
Photograph 2. CS01 Conducted Susceptibility, Power Leads (30 Hz to 50 kHz) Test Setup .....	16
Photograph 3. CS02 Conducted Susceptibility, Power Leads (30 Hz to 50 kHz) Test Setup .....	19
Photograph 4. CS04, Undesired Signal Rejection .....	23
Photograph 5. CS06 Conducted Susceptibility, Spikes, Power Leads Test Setup .....	27
Photograph 6. RE02, Radiated Emissions, Electric Field, 14 kHz to 18 GHz, Test Setup .....	34



## List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
cm	Centimeters
<i>d</i>	Measurement Distance
dB	Decibels
dB $\mu$ A	Decibels above one microamp
dB $\mu$ V	Decibels above one microvolt
dB $\mu$ A/m	Decibels above one microamp per meter
dB $\mu$ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EMC	Electromagnetic Compatibility
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
FREQ	Frequency
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
$\mu$ H	microhenry
$\mu$ F	microfarad
$\mu$ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane



## I. Executive Summary

**DRAFT**



### A. Purpose of Test

The purpose of these tests was to verify compliance of the Planar Monolithics Industries, Inc., Successive Detection Log Video Amplifier (referred to as EUT hereafter) to the specifications listed in Table 1.

### B. Executive Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with MIL-STD-461C/462 EMC Requirements for Navy - shipboard below deck limits. All tests were performed in accordance with Planar Monolithics Industries, Inc. Purchase Order.

Reference	Description	Compliance
Purchase Order #31100535	Purchase Order for Planar Monolithics Industries, Inc., Successive Detection Log Video Amplifier Testing	
MIL-STD-461C, CE03	Conducted Emissions, Power and Interconnecting Leads, 0.015 kHz to 50 MHz	Compliant
MIL-STD-461C, CS01	Conducted Susceptibility, Power Leads, 30 Hz to 50 kHz	Compliant
MIL-STD-461C, CS02	Conducted Susceptibility, Power Leads, 50 kHz to 400 MHz	Compliant
MIL-STD-461C, CS04	Undesired Signal Rejection	Compliant
MIL-STD-461C, CS06	Conducted Susceptibility, Spikes, Power Leads	Compliant
MIL-STD-461C, RE02	Radiated Emissions, Electric Field, 14 kHz to 18 GHz	Compliant

Table 1. Executive Summary of MIL-STD-461C/462 Compliance Testing



## II. Equipment Configuration

**DRAFT**



<b>Model(s) Tested:</b>	SDLVA-61F-80 OPT. 5829387-002, TBRK
<b>Model(s) Covered:</b>	SDLVA-61F-80 OPT. 5829387-002, TBRK
<b>S/N's</b>	PM311204, PM311205, and PM311206
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.
<b>Evaluated by:</b>	Asad Bajwa
<b>Date(s):</b>	12/08/03, 12/09/03, and 12/11/03

DRAFT



## A. Overview

The purpose of this series of tests was to verify compliance of the Planar Monolithics Industries, Inc., Successive Detection Log Video Amplifier with the limits and test methods indicated in MIL-STD-461C/462.

## B. References

<b>MIL-STD-461C: 1986</b>	Military Standard--Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference
<b>MIL-STD-461D: 1993</b>	Military Standard--Requirements for the Control of Electromagnetic Interference Emissions and Susceptibility
<b>MIL-STD-461E: 1999</b>	Military Standard--Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment
<b>MIL-STD-462: 1993</b>	Military Standard--Test Method Standard for Measurements of Electromagnetic Interference Characteristics
<b>MIL-STD-45662A</b>	Calibration System Requirements
<b>ANSI/ISO/IEC 17025: 2000</b>	General Requirements for the Competence of Testing and Calibration Laboratories

## C. Test Site

All testing was performed at MET Laboratories, Inc., 33439 Western Ave., Union City, California 94587. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

## D. Description of Test Sample

The Successive Detection Log Video Amplifier (SDLVA-61F-80 OPT. 5829387-002, TBRK), Equipment Under Test (EUT) for the remainder of this document, operates at 61.25 MHz.



### E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

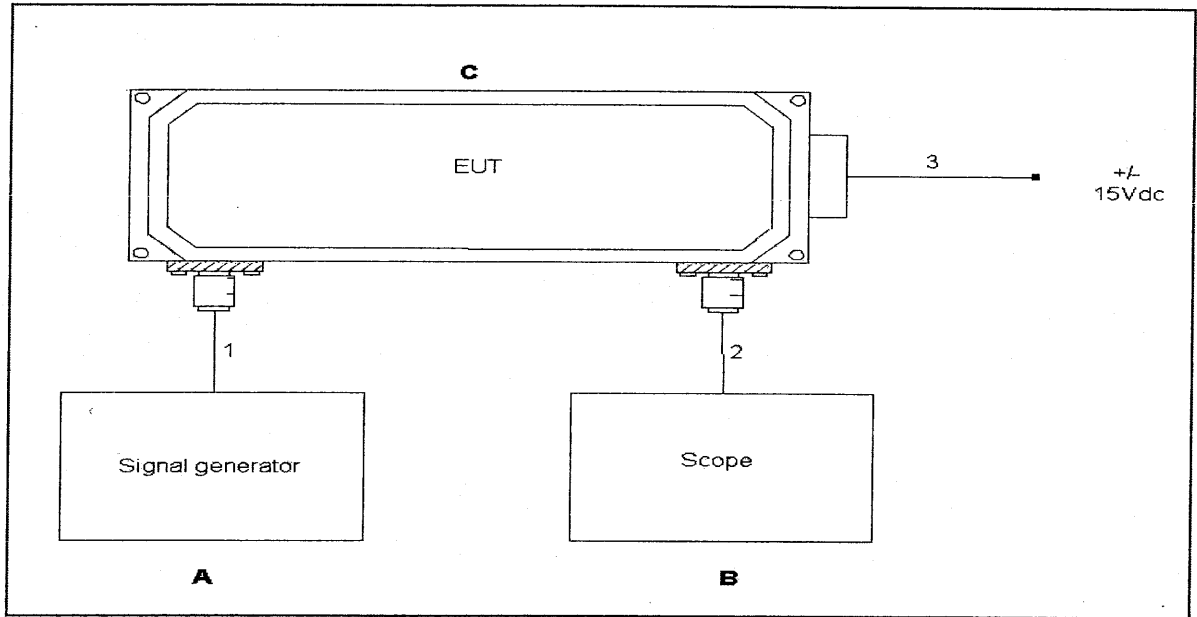


Figure 1. Block Diagram of Test Configuration

Ref. ID	Name / Description	Model Number	Serial Number	Revision
A	Signal Source	N/A	N/A	N/A
B	Oscilloscope	N/A	N/A	N/A
C	Successive Detection Log Video Amplifier	SDLVA-61F-80 OPT. 5829387-002	PM311204, PM311205, PM311206	N/A

**Test Setup:** During all the EMC testing, the EUT was setup on a table with a metallic top inside shielded enclosure. All the I/O and power cables were raised from the tabletop by 5-cm spacers and routed as specified in MIL-STD-461C/462 standard. LISNs were used at the power input to provide stable impedance. The EUT is a successive detection log video amplifier (SDLVA-61F-80 OPT. 5829387-002, TBRK), it operates at 61.25MHz. EUT was exercised by applying a 61.25 MHz signal from a signal generator as shown in test setup.



## **F. Method of Monitoring EUT Operation**

The EUT was powered by a dual power supply as shown in setup. It was being exercised by applying a 61.25 MHz signal from a signal generator as shown in test setup (see Figure 1) and the output was being monitored with the help of an Oscilloscope.

## **G. Modifications**

### **a) Modifications to EUT**

No modifications were made to the EUT.

### **b) Modifications to Test Standard**

No modifications were made to the test standard.

## **H. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Planar Monolithics Industries, Inc. upon completion of testing.

**DRAFT**



### III. Electromagnetic Compatibility Conducted Emission and Susceptibility Criteria

DRAFT



**A. CE03, Conducted Emissions, Power and Interconnecting Leads, 0.015 to 50 MHz**

**Test Requirement(s):** This requirement is applicable for the following types of leads:

AC and DC leads, which obtain power from other sources or provide power to other equipment, distribution panels, or subsystems; ground or neutrals, which are not grounded internally to the subsystem or equipment being measured; and, for Army and Navy procurements, interconnecting control leads which provide AC and DC power from or to the test sample. The requirement is not applicable for interconnecting signal leads such as a clock, IF audio, firing, digital, radio frequency (RF), and the like, unless otherwise specified by the Command or agency concerned. For Army procurements, the requirement is applicable using the Line Impedance Stabilization Network, as described in MIL-STD-462.

**Test Conditions:** The Data Collection System used the current probe to measure the conducted emissions on each phase and/or neutral of the input power. LISNs were placed in series with the power line. The system scanned the applicable frequency range and produced graphical and tabular data identifying the largest signals with respect to the applicable limits. All correction factors of the test setup such as cable loss and transducer correction factors are accounted for in the Data Collection System Software. All cables were elevated 5 cm from the ground plane with standoffs.

**Test Results:** The EUT was found compliant with the specified CE03 Conducted Emissions, Power and Interconnecting Leads (0.015 to 50 MHz) limits. Test result details appear on following pages.



**Test Engineer(s):** Asad Bajwa

**Test Date(s):** 12/09/03

**DRAFT**



CE03, Conducted Emissions, Power and Interconnecting Leads, 0.015 to 50 MHz, continued

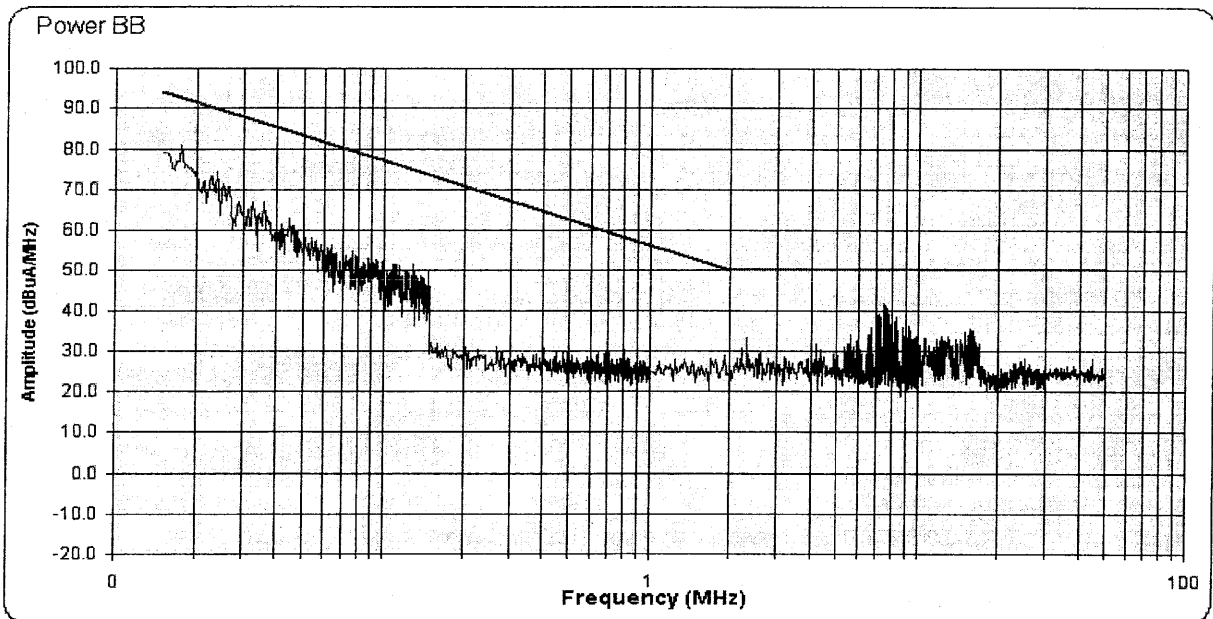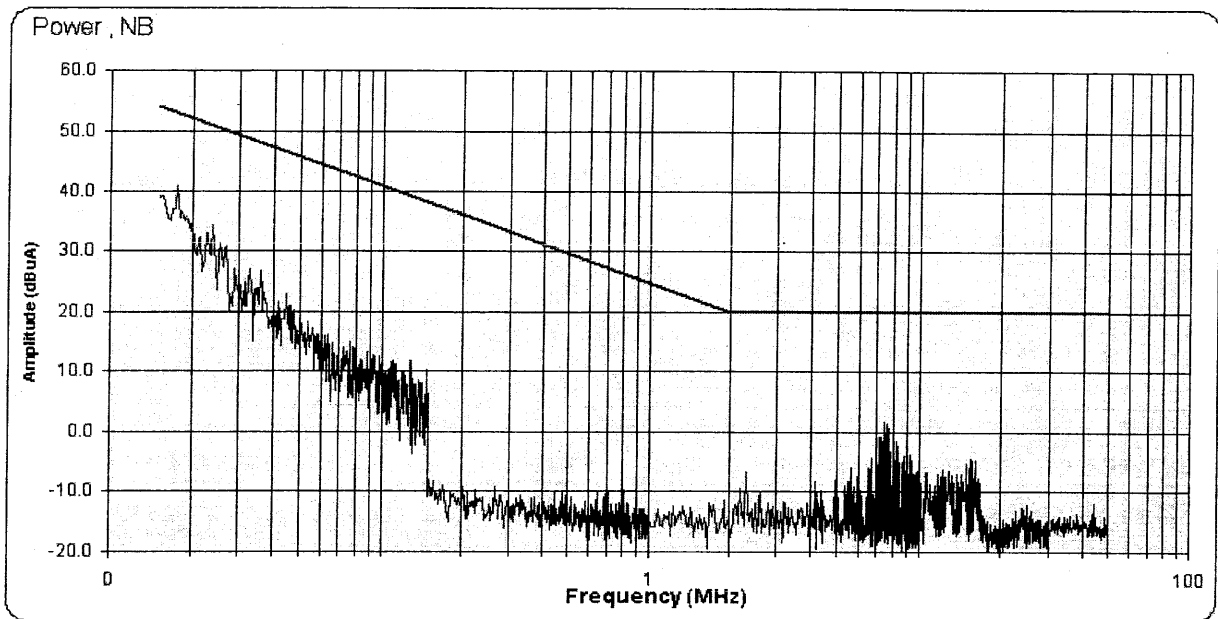



CE03, Conducted Emissions, Power and Interconnecting Leads, 0.015 to 50 MHz, continued


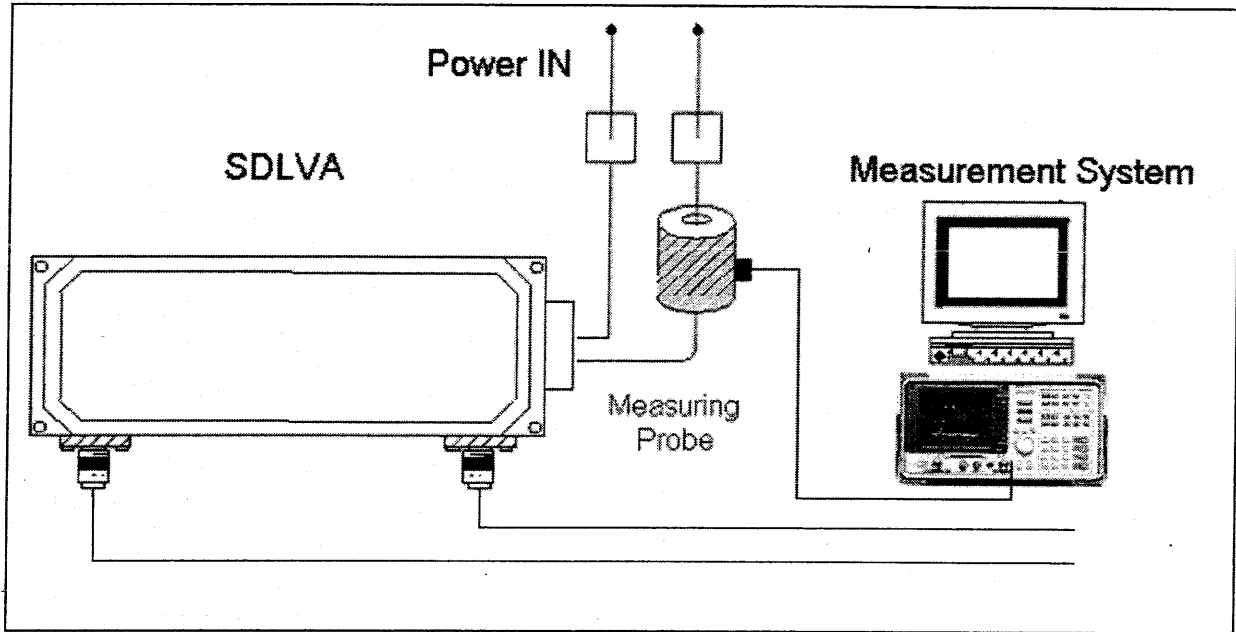


Figure 2. CE03, Setup Block Diagram

DRY



**CE03, Conducted Emissions, Power and Interconnecting Leads, 0.015 to 50 MHz, continued**

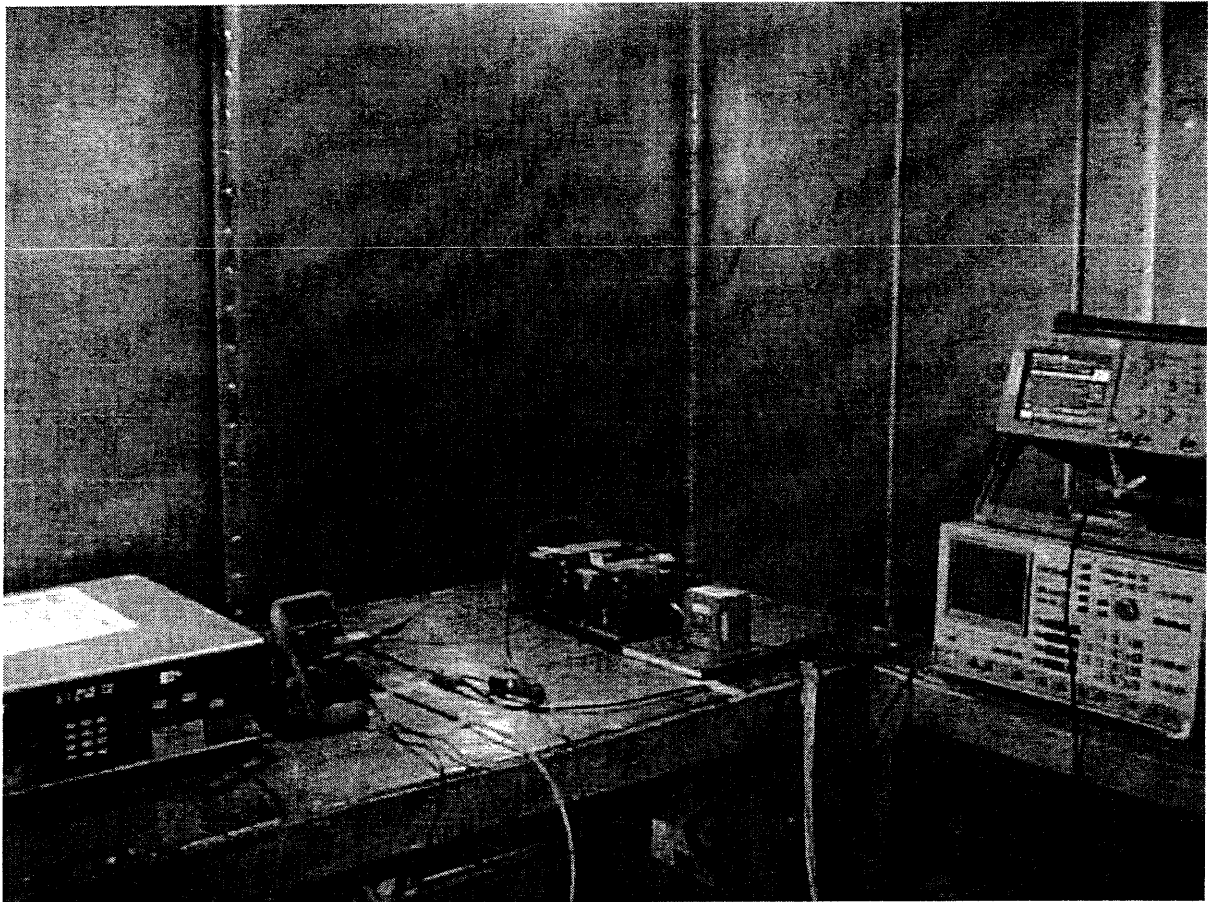

**Photograph 1. CE03 Conducted Emissions, Power and Interconnecting Leads (0.015 to 50 MHz) Test Setup**



## B. CS01, Conducted Susceptibility, Power Leads, 30 Hz to 50 kHz

**Test Requirement(s):** This requirement is applicable to equipment and subsystem AC and DC power leads, including grounds and neutrals which are not grounded internally to the equipment or subsystem. This requirement is not applicable within  $\pm 5$  percent of the power frequency (ies). For Navy procurements, this requirement may be deleted for AC leads, with the approval of the Command or agency concerned, if no circuit within the equipment or system is more sensitive than 100 millivolts (mV). For equipment and subsystems procured solely for Army use, this requirement is applicable for DC leads only.

Test was performed at Navy - shipboard below deck limits.

**Test Conditions:** The Data Collection System used the "Current Injection Probe" to inject the conducted signals on each phase and or neutral of the input power. LISNs were placed in series with the power line. The system swept the applicable frequency range. All cables were elevated 5 cm from the ground plane with standoffs.

**Test Results:** The EUT was found compliant with the specified CS01 Conducted Susceptibility, Power Leads (30 Hz to 50 kHz) limits. Test result details appear on following pages.

**Test Engineer(s):** Asad Bajwa

**Test Date(s):** 12/08/03

**DRAFT**



CS01, Conducted Susceptibility, Power Leads, 30 Hz to 50 kHz, continued

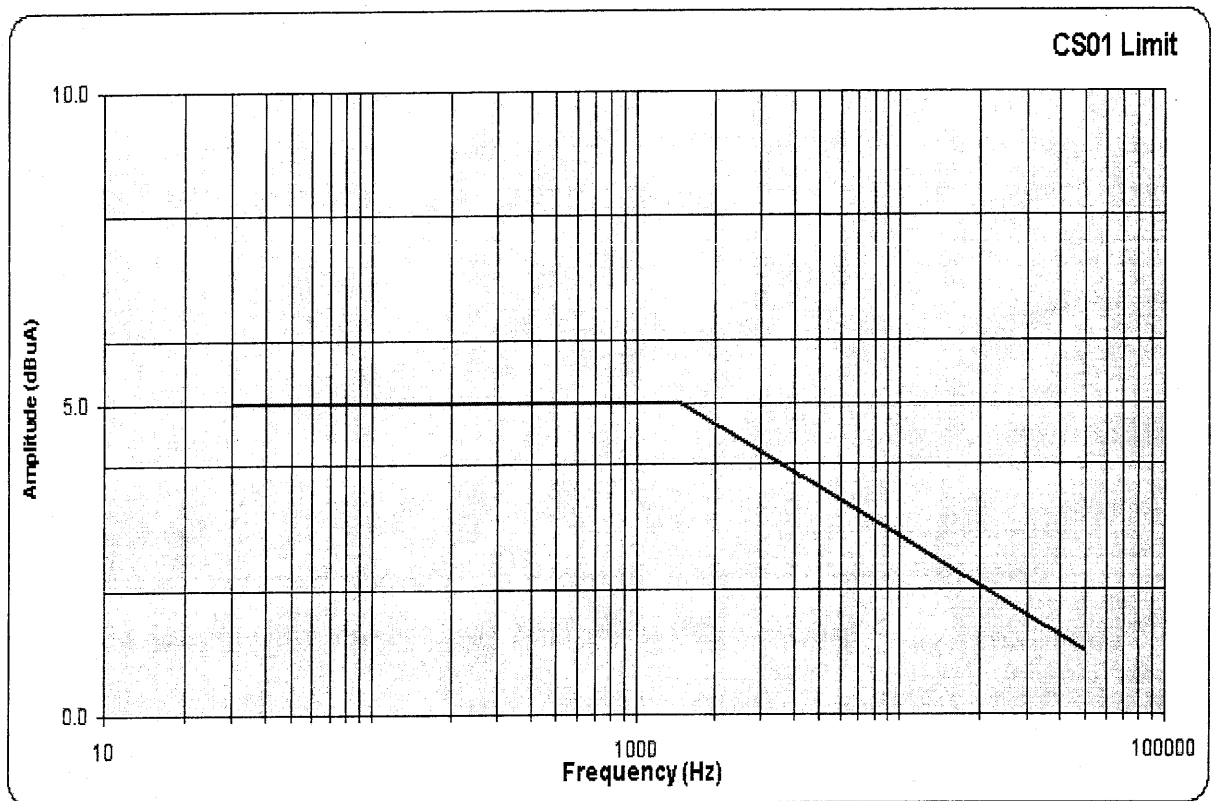


Figure 3. Limit for CS01



### CS01, Conducted Susceptibility, Power Leads, 30 Hz to 50 kHz, continued


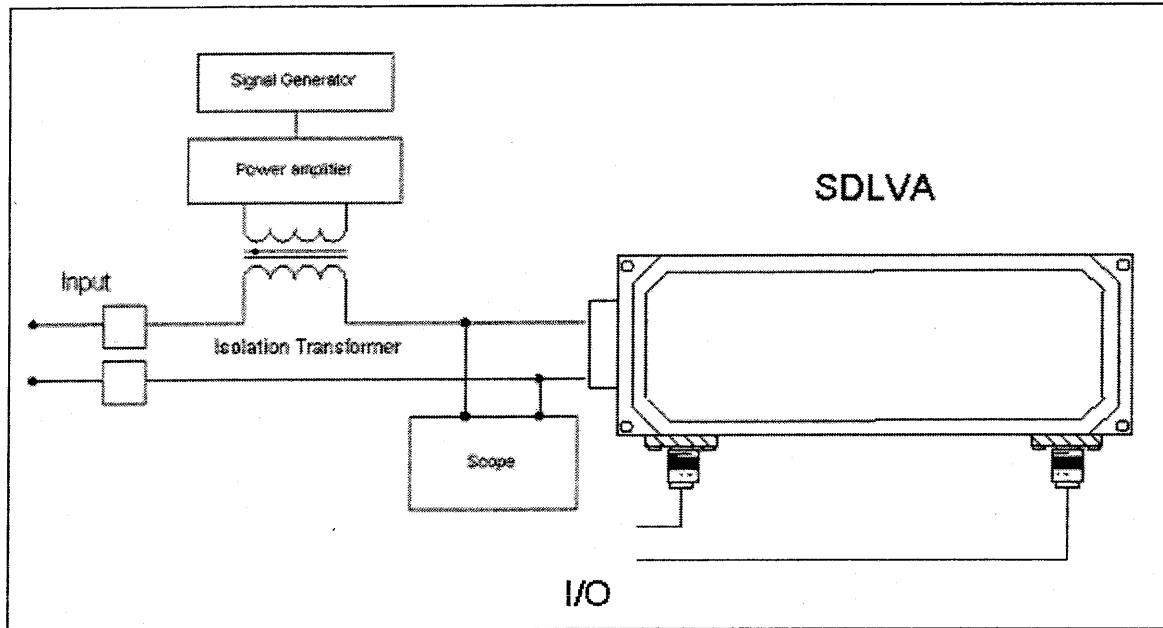


Figure 4. CS01, Setup Block Diagram



**CS01, Conducted Susceptibility, Power Leads, 30 Hz to 50 kHz, continued**

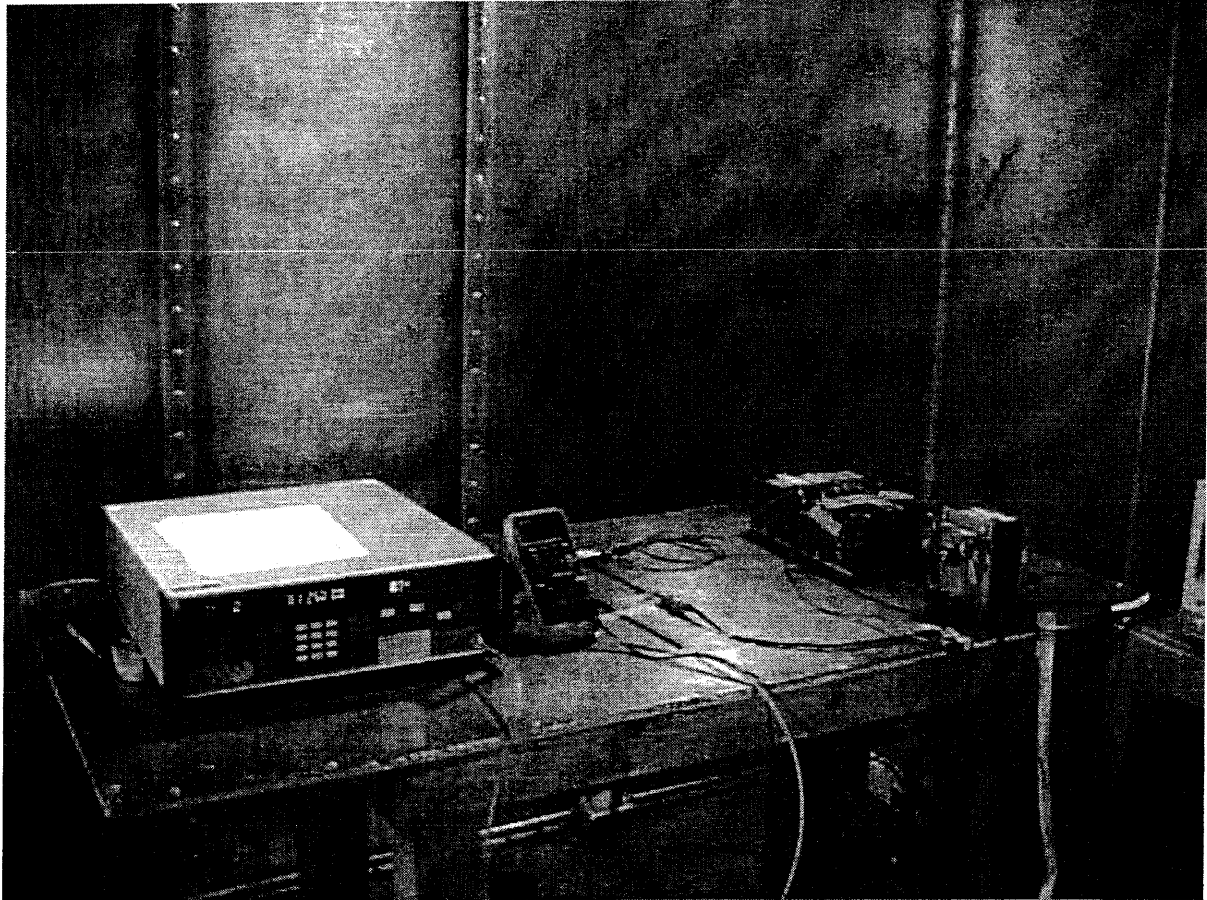

**Photograph 2. CS01 Conducted Susceptibility, Power Leads (30 Hz to 50 kHz) Test Setup**



### C. CS02, Conducted Susceptibility, Power Leads, 50 kHz to 400 MHz

**Test Requirement(s):** This requirement is applicable to equipment and subsystem AC and DC power leads, including grounds and neutrals which are not grounded internally to the equipment or subsystem. This requirement is not applicable within  $\pm 5$  percent of the power frequency (ies). For Navy procurements, this requirement may be deleted for AC leads, with the approval of the Command or agency concerned, if no circuit within the equipment or system is more sensitive than 100 millivolts (mV). For equipment and subsystems procured solely for Army use, this requirement is applicable for DC leads only.

The test sample shall not exhibit any malfunction, or degradation of performance, or deviation from specified indications beyond the tolerances indicated when subjected to 1 volt from a 50 ohm source. Test was performed at Navy - shipboard below deck limits.

**Test Conditions:** The Data Collection System used the "Current Injection Probe" to inject the conducted signals on each phase and or neutral of the input power. LISNs were placed in series with the power line. The system swept the applicable frequency range. All cables were elevated 5 cm from the ground plane with standoffs.

**Test Results:** The EUT was found compliant with the specified CS02 Conducted Susceptibility, Power Leads (50 kHz to 400 MHz) limits. Test result details appear on following pages.

**Test Engineer(s):** Asad Bajwa

**Test Date(s):** 12/08/03

DRAFT



CS02, Conducted Susceptibility, Power Leads, 50 kHz to 400 MHz, continued


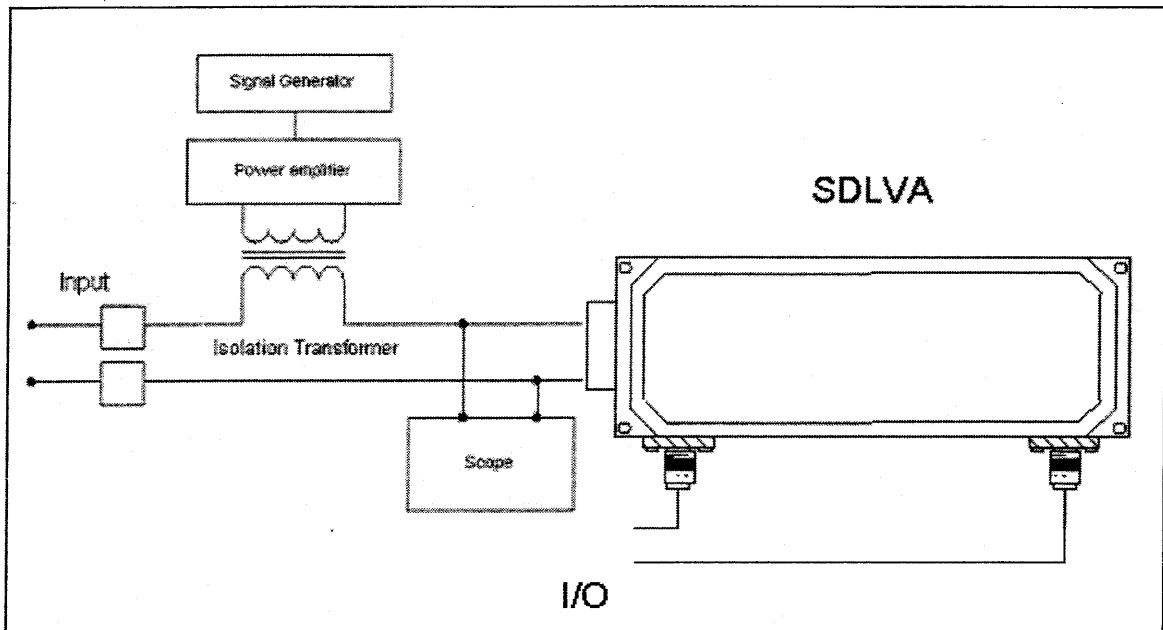


Figure 5. CS02, Setup Block Diagram

DRAFT



**CS02, Conducted Susceptibility, Power Leads, 50 kHz to 400 MHz, continued**

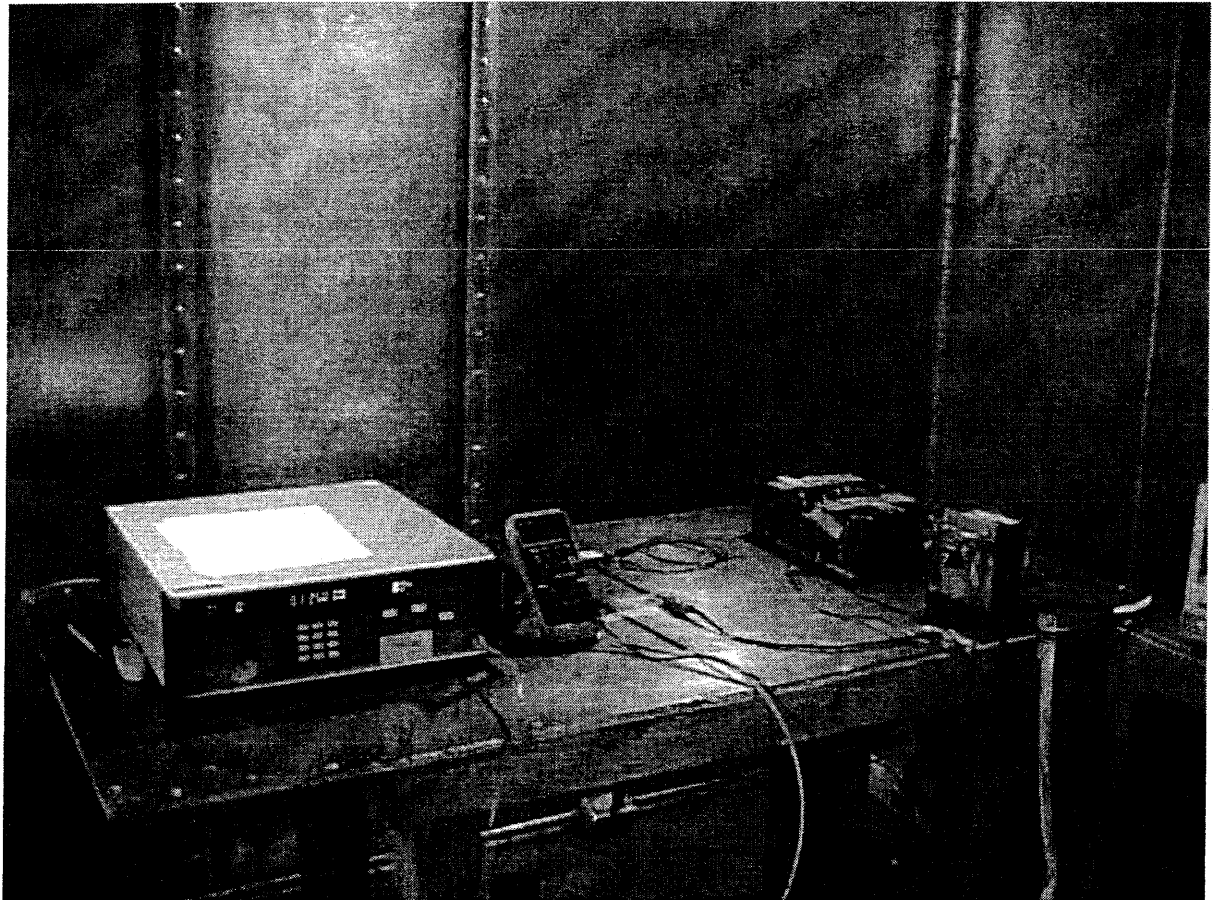

**Photograph 3. CS02 Conducted Susceptibility, Power Leads (30 Hz to 50 kHz) Test Setup**



#### D. CS04, Undesired Signal Rejection

**Test Requirement(s):** This requirement is applicable to receiving equipment and subsystems, such as receivers, RF amplifiers, transceivers, and the like. The applicable frequency range for this requirement is dependent on the operating frequency of the test sample as specified in MIL-STD-462.  
Test was performed at Navy - shipboard below deck limits.

**Test Conditions:** The Data Collection System used the "Current Injection Probe" to inject the conducted signals on each phase and or neutral of the input power. LISNs were placed in series with the power line. The system swept the applicable frequency range. All cables were elevated 5 cm from the ground plane with standoffs.

**Test Results:** The EUT was found compliant with the specified CS04 Conducted Susceptibility, undesired Signal rejection limits. Test result details appear on following pages.

**Test Engineer(s):** Asad Bajwa

**Test Date(s):** 12/08/03

DRAFT



CS04, Undesired Signal Rejection, continued


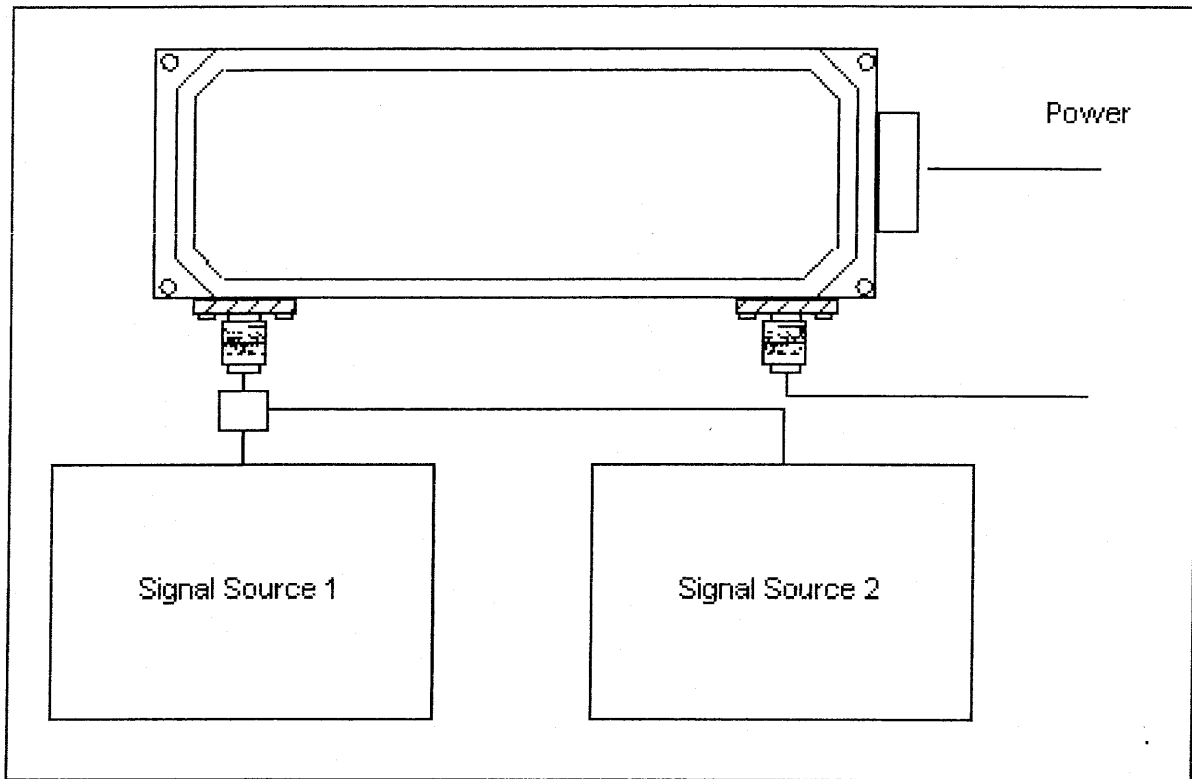


Figure 6. CS04, Setup Block Diagram



### CS04, Undesired Signal Rejection, continued

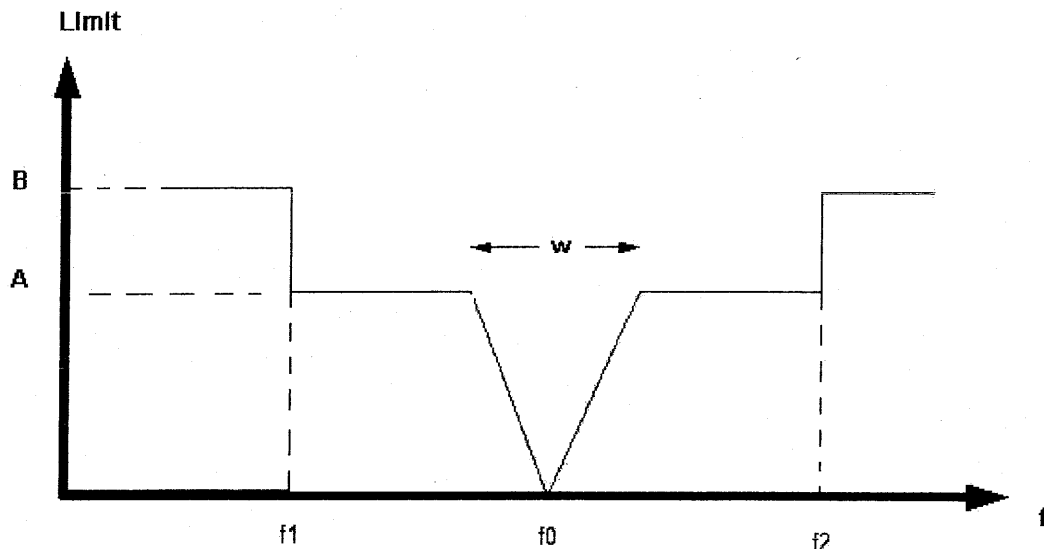

- $f_0$  = Receiver tuned frequency or band center for amplifiers.
- $f_1$  = Lowest tunable frequency of receiver band in use or the lowest frequency of amplifier passband.
- $f_2$  = Highest tunable frequency of receiver band in use or the highest frequency of amplifier passband.
- $W$  = Bandwidth between the 80 dB points of the receiver selectivity curve as defined in the test sample's technical requirements or the control plan.


#### Limits:

1. The limit at A is 80 dB above the input level required to produce the standard reference output. (This limit shall not be used for amplifiers)
2. The limit at B shall be set as follows:
  - a. Receivers: 0 dBm applied directly to the receiver input terminals.
  - b. Amplifiers: The limit shall be as specified in the test sample's technical requirement or control plan. If no limit is defined in the above documents, the 0 dBm value shall be used.

Figure 7. Limit for CS04



### CS04, Undesired Signal Rejection, continued

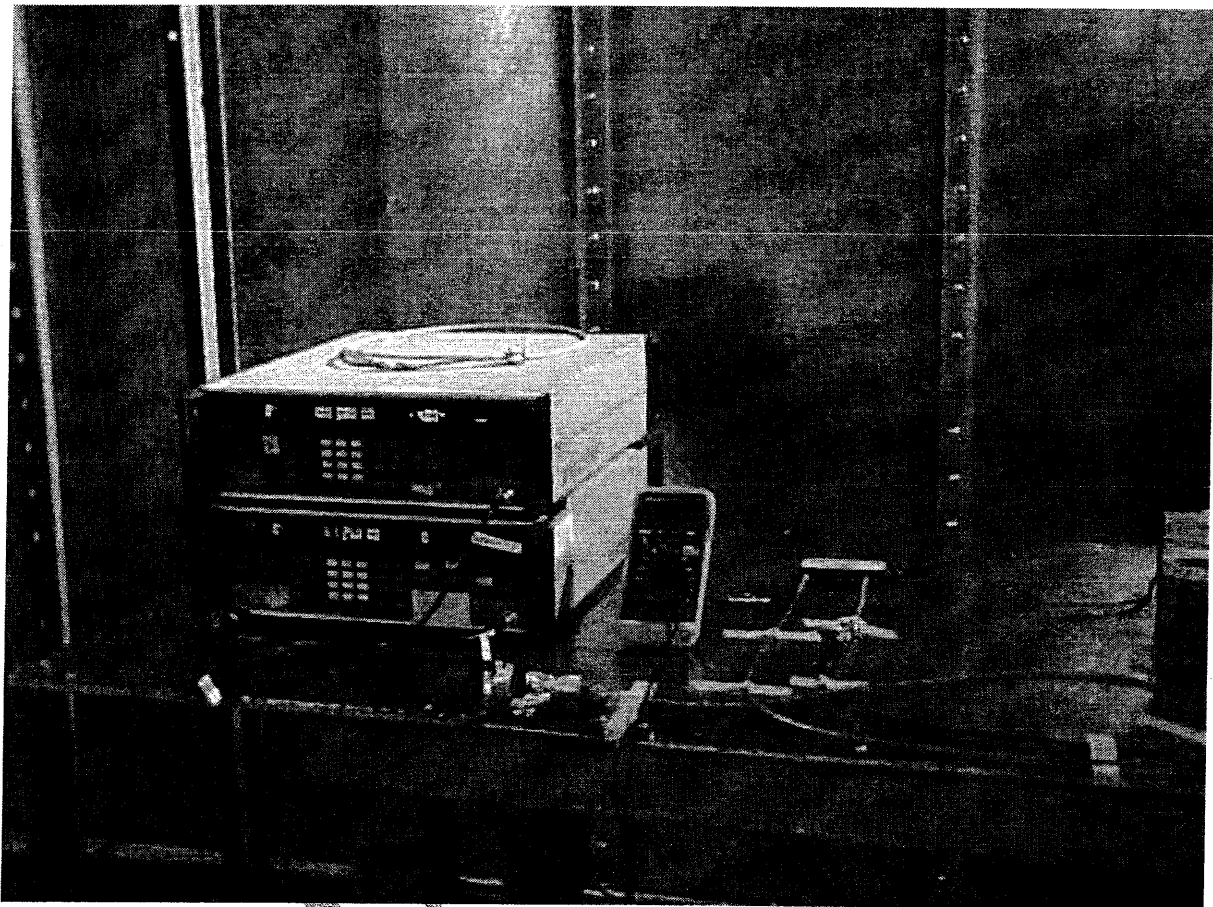

Photograph 4. CS04, Undesired Signal Rejection



### E. CS06, Conducted Susceptibility, Spikes, Power Leads

**Test Requirement(s):** This requirement is applicable to equipment and subsystem AC and DC power leads, including grounds and neutrals which are not grounded internally to the equipment or subsystem. Test was performed at Navy - shipboard below deck limits.

**Test Condition:** The EUT and the spike generator were connected as shown in the diagram below. The output waveform of the spike generator was verified using the oscilloscope. Synchronization and triggering was used to position the spike to the specific test sample signal position to produce maximum susceptibility. Positive and negative, single and repetitive (10pps) spikes were applied to the EUT for the time duration as specified in MIL-STD-461/462 standard. Spikes were synchronized to the power line frequency and position on each 90-degree phase position for a period of 5 minutes.

Spike #1,  $E_1 = 200V$        $t_1 = 10 \mu\text{Sec}$

Spike #2,  $E_2 = 200V$        $t_2 = 0.15 \mu\text{Sec}$

**Test Results:** The EUT was found compliant with the specified CS06 Conducted Susceptibility, Spikes, Power Leads when tested for the levels specified in the standard. Test result details appear on following pages. No anomalies were observed.

**Test Engineer(s):** Asad Bajwa

**Test Date(s):** 12/09/03

**DRAFT**



### CS06, Conducted Susceptibility, Spikes, Power Leads, continued


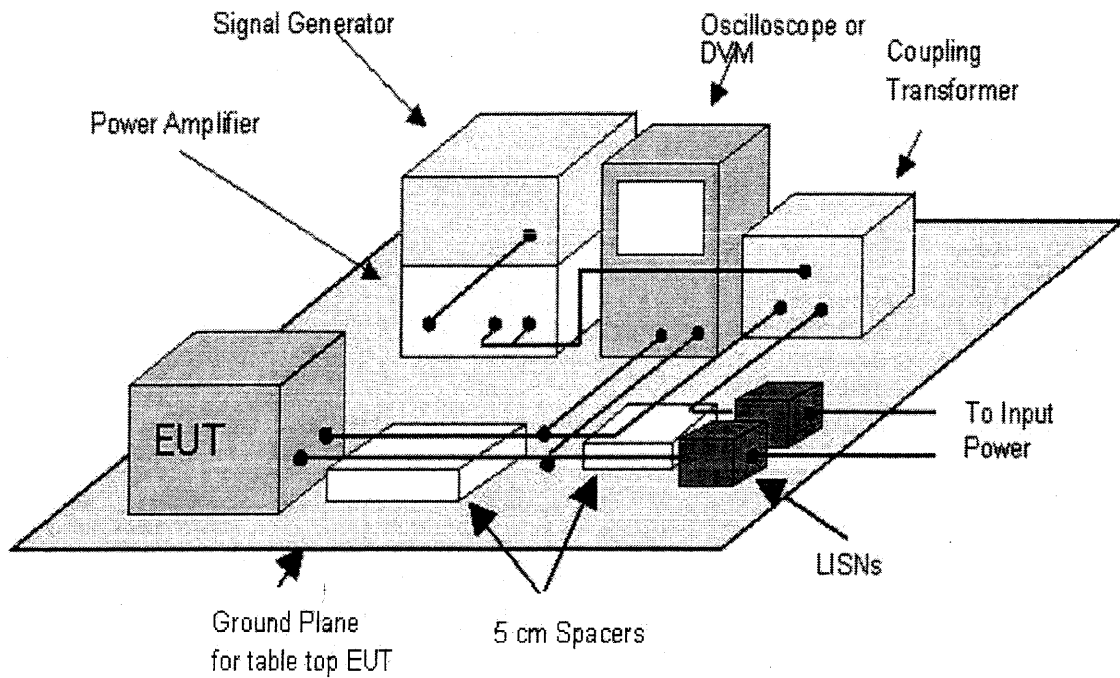


Figure 8. CS06, Setup Block Diagram

DK



CS06, Conducted Susceptibility, Spikes, Power Leads, continued

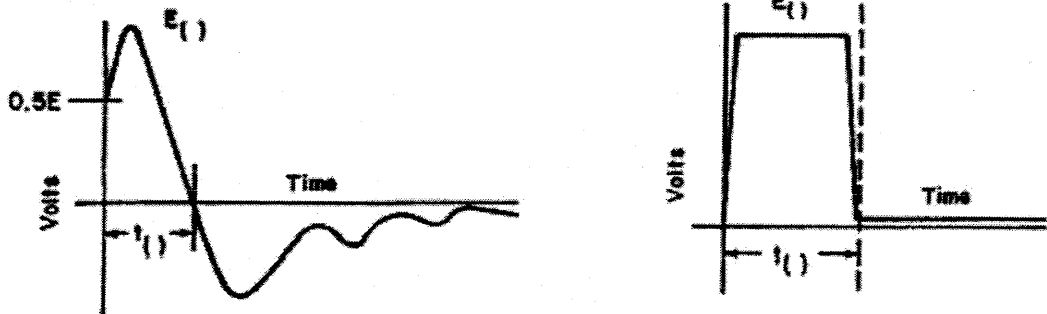


**NOTE:** The test sample shall be subjected to the spike(s) with the waveform shown and with the specified voltage (s) and pulsewidth (s).

Figure 9. CS06, Acceptable Waveshapes



**CS06, Conducted Susceptibility, Spikes, Power Leads, continued**

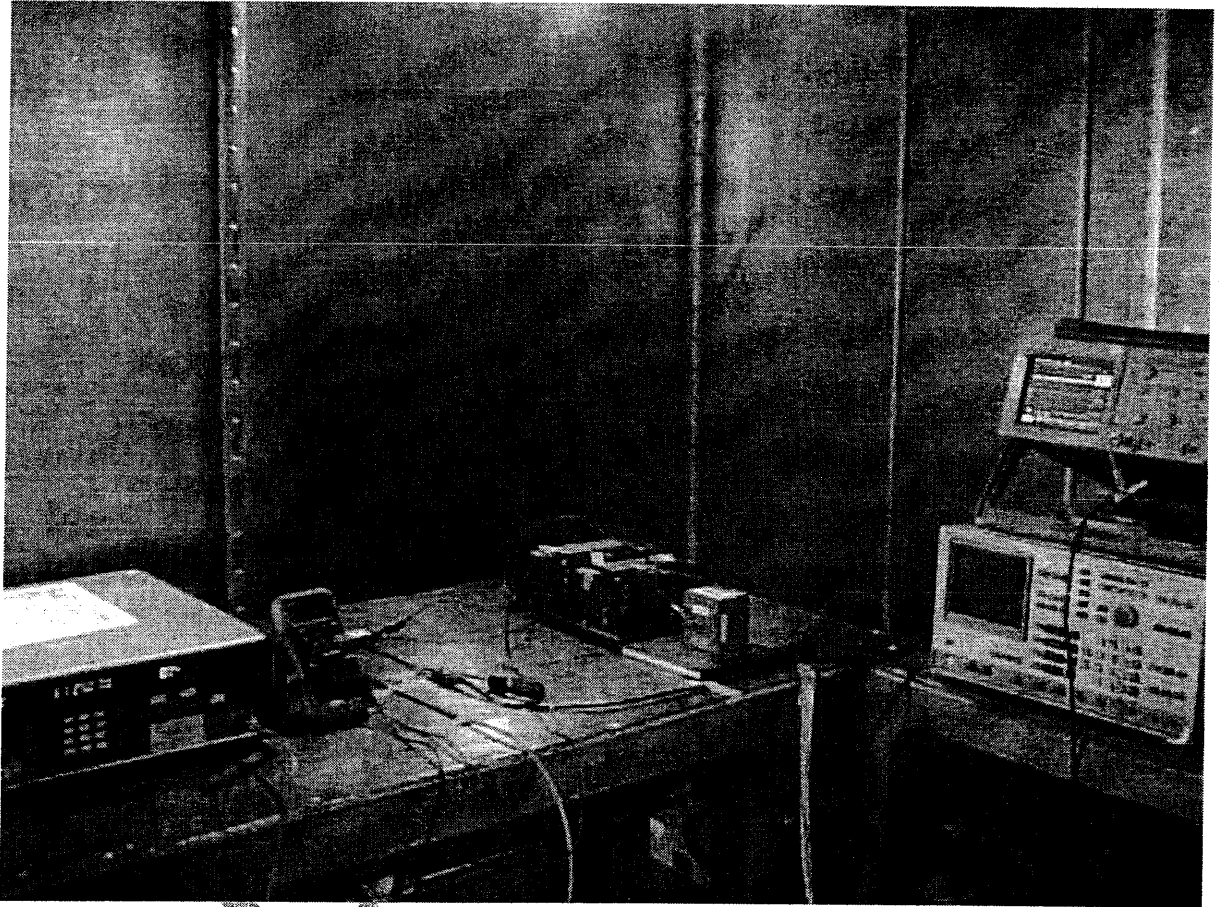

**Photograph 5: CS06 Conducted Susceptibility, Spikes, Power Leads Test Setup**



## IV. Electromagnetic Compatibility Radiated Emission Criteria

**DRAFT**



**A. RE02, Radiated Emissions, Electric Field, 14 kHz to 18 GHz**

**Test Requirement(s):** This requirement is applicable for radiated emissions from equipment and subsystems, cables (including control, pulse, IF, power, and antennas transmission lines) and interconnecting wiring of the test sample; for narrowband, it applies at the fundamental frequencies and all spurious emissions, including harmonics, but does not apply to radiation from antennas. This requirement is applicable for broadband emissions from 14 kHz to 1 GHz and for narrowband emissions from 14 kHz to 18 GHz.

Test was performed at Navy - shipboard below deck limits.

**Test Conditions:** The EUT was tested within the anechoic chamber at MET Laboratories. The receiving antennas were set up perpendicular to and 1 m away from the EUT.

**Test Procedure:** The method of testing, test conditions, and test procedures of MIL-STD-461C were used. The EUT was examined by using various hand held EMI probes and broadband antennas to locate the area of highest emissions. Each antenna was positioned one meter away from the EUT at a height of one meter, parallel to the area of highest emissions.

The EUT was operated for sufficient period of time before stating the test and the test was performed in accordance with MIL-STD-461C. The data collection system scanned the frequency range of 14 kHz - 30 MHz using the active rod antenna. The biconical antenna was used for the frequency range of 30 MHz - 1 GHz. The Horn antenna was used for the frequency range of 1 GHz - 18 GHz. For frequencies above 30 MHz, the test was performed with the antennas positioned horizontally and vertically.

**Test Results:** The EUT was *compliant* with the specified RE02 Radiated Emissions, Electric Field, and 14 kHz to 18 GHz. Test result details appear on following pages. Refer to Section D for modifications made to EUT to achieve compliance.



**Test Engineer(s):** Asad Bajwa

**Test Date(s):** 12/11/03



RE02, Radiated Emissions, Electric Field, 14 kHz to 18 GHz, continued



Narrowband Plots

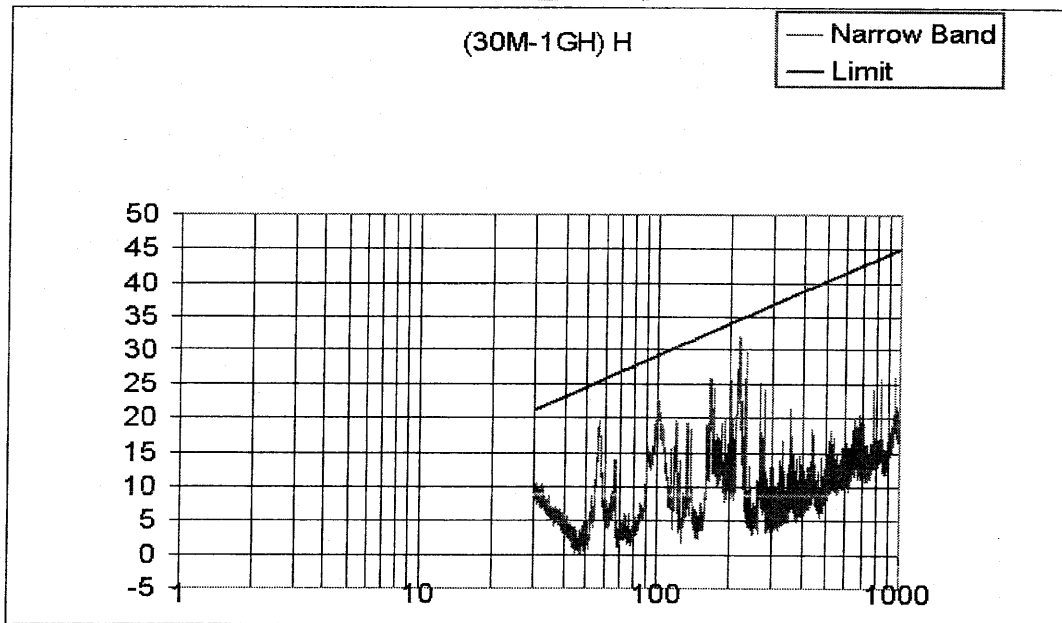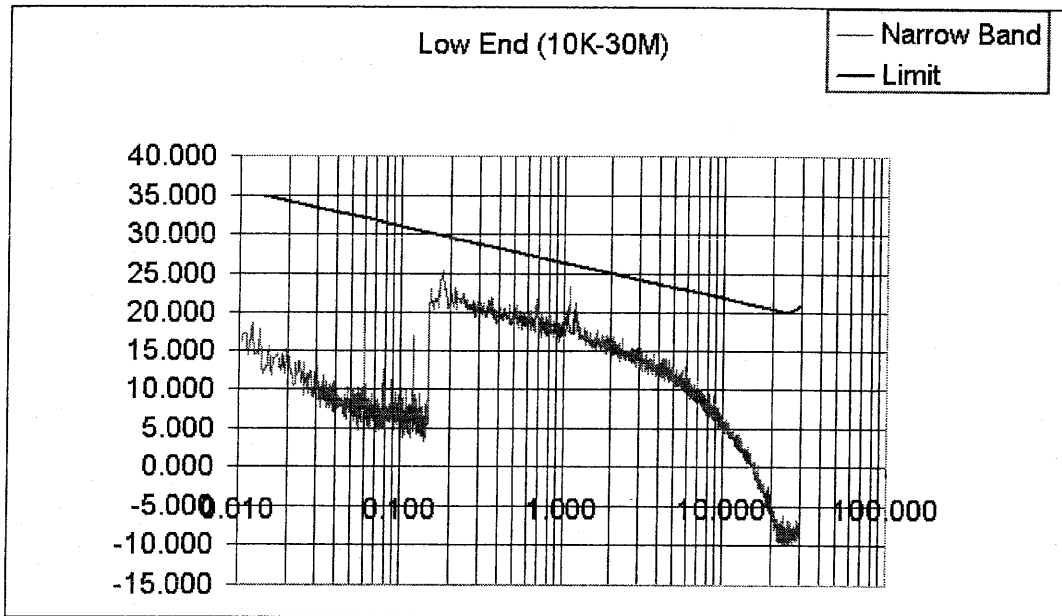



RE02, Radiated Emissions, Electric Field, 14 kHz to 18 GHz, continued


Narrowband Plots, cont.

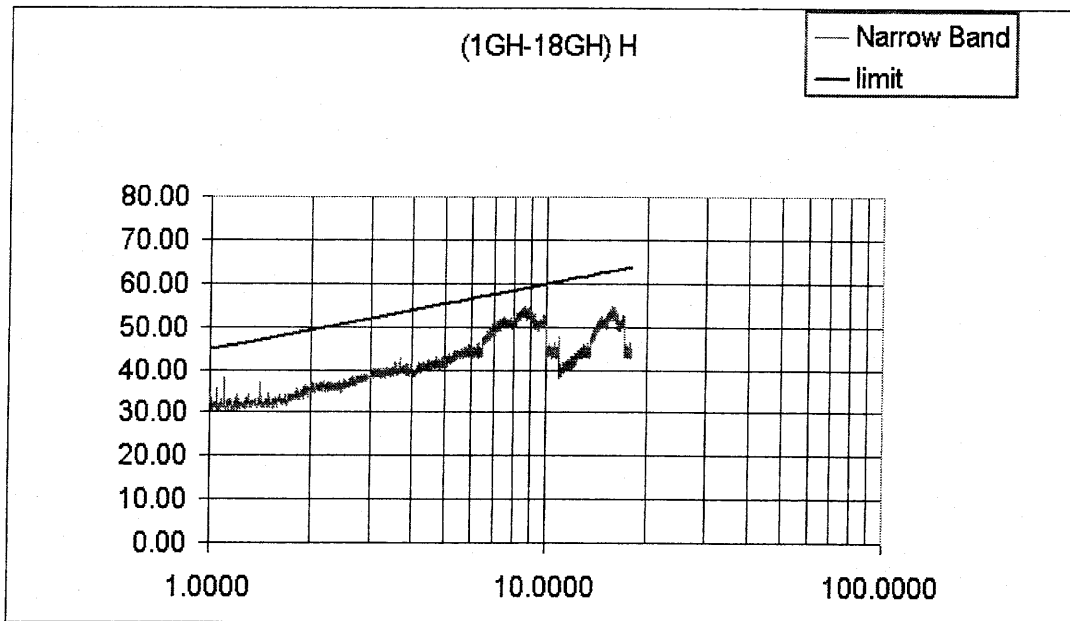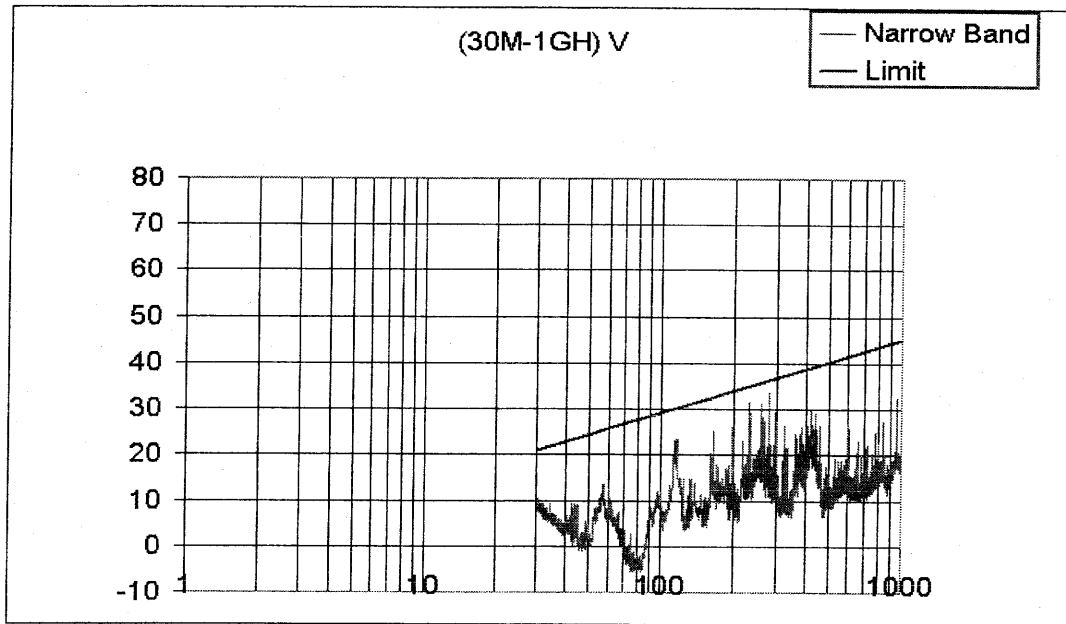



RE02, Radiated Emissions, Electric Field, 14 kHz to 18 GHz, continued

Narrowband Plots, cont.

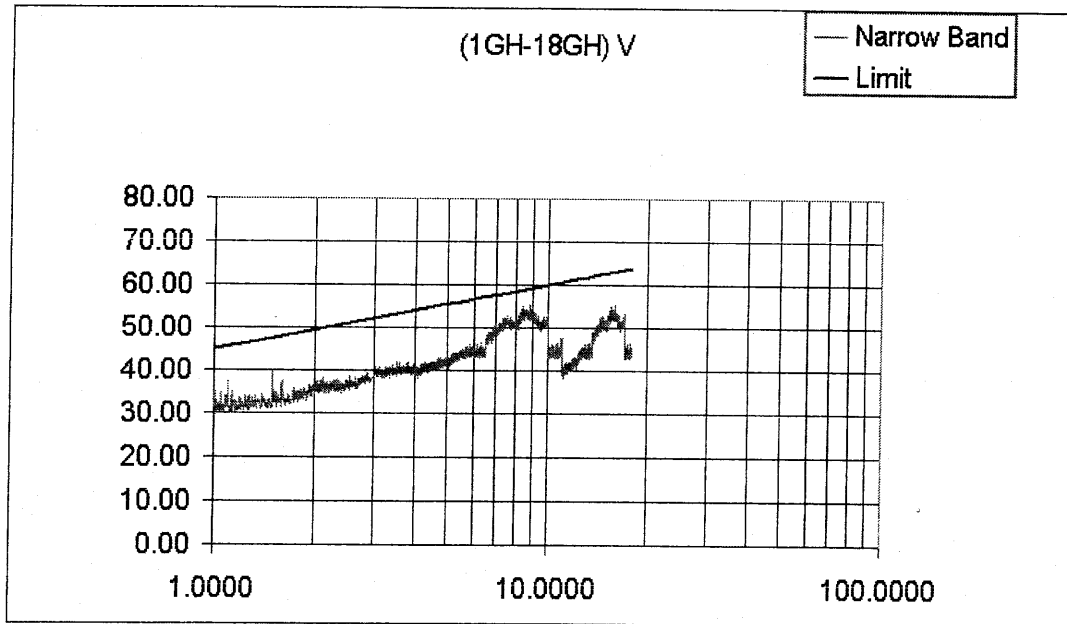

DRAFT



RE02, Radiated Emissions, Electric Field, 14 kHz to 18 GHz, continued


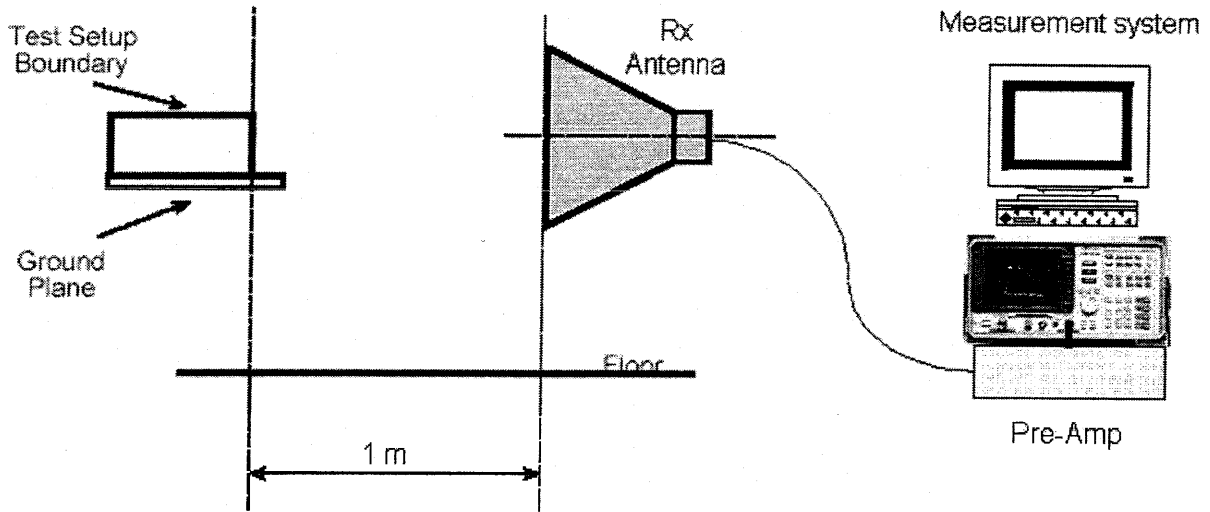


Figure 10. RE02, Setup Block Diagram

DRAFT



**RE02, Radiated Emissions, Electric Field, 14 kHz to 18 GHz, continued**

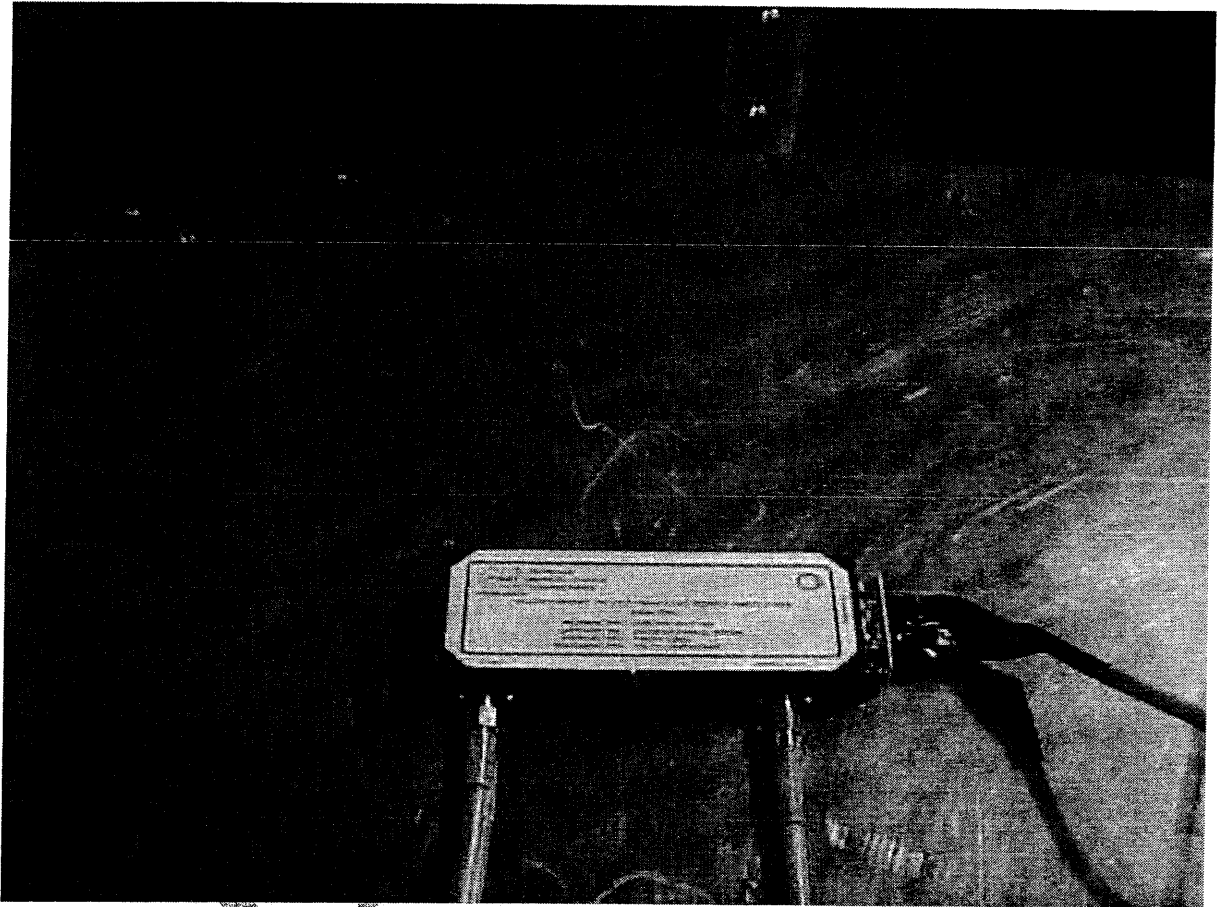

**Photograph 6. RE02, Radiated Emissions, Electric Field, 14 kHz to 18 GHz, Test Setup**



## V. Test Equipment

**DRAFT**



### Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

Test Name: CE03				Test Date(s): 12/09/03	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
<i>Test Equipment not available at this time. Will be completed at the time of final issue.</i>					
Test Name: CS01				Test Date(s): 12/08/03	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
Test Name: CS02				Test Date(s): 12/08/03	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
Test Name: CS04				Test Date(s): 12/08/03	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
Test Name: CS06				Test Date(s): 12/09/03	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
Test Name: RE02				Test Date(s): 12/11/03	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



**End of Report**

**DRAFT**