

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing and can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

Specifications:

Frequency Range: 2 to 18 GHz
Gain: +20dB Typ.
Gain Flatness: +/- 2.0dB Max.
Noise Figure: 4.0dB Typ.
OP1dB: +14dBm Min.
VSWR Input/Output: 2.0:1 Max.
DC Voltage Supply: +12 to +15VDC
DC Current Draw: 150mA Max.
Connectors In/Out: SMA Female
Finish: Gold Plated

Features:

Internal Voltage Regulation
Unconditional Stability

Available Options:

Various Package types
Various Connector types
Temperature Compensation
Gain and Phase Matching
MIL-STD-883 Screening Available

Environmental Ratings:


Temperature: -20°C to + 70°C (Operating)
-55°C to +125°C (Storage)
Humidity: MIL-STD-202F, METHOD 103B COND B.
Shock: MIL-STD-202F, METHOD 213B COND B.
Altitude: MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.


ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	A1	ORIGINAL RELEASE	02/21/08
	A2	ECN # 13-0092	07/29/13

PE2 HOUSING WITH CARRIER

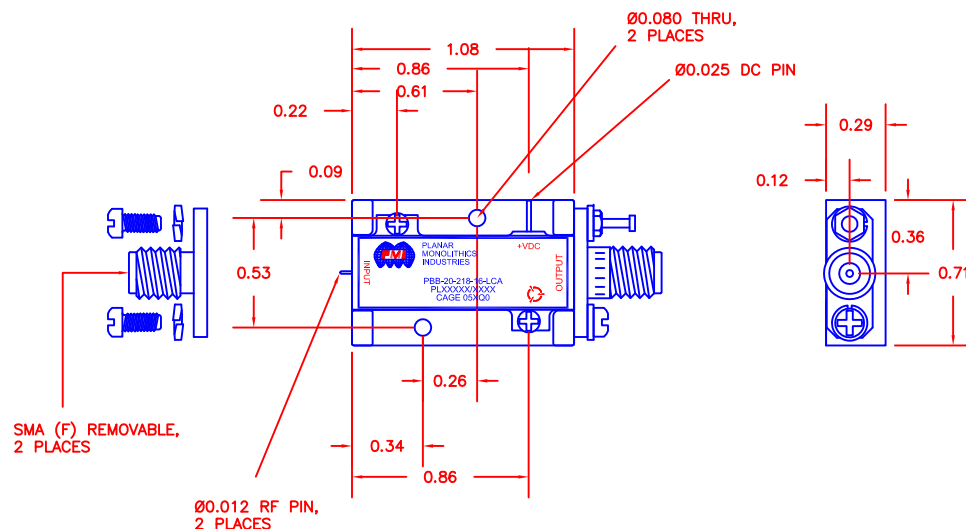

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

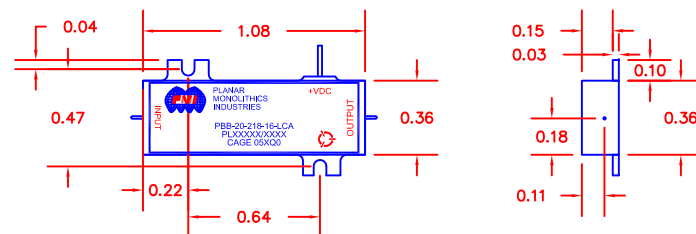

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE			
DRAWN		02/21/08		PRODUCT FEATURE			
CHECKED				PBB-20-218-16-LCA			
ISSUED							
SIZE		FSCM NO.		DWG NO.		REV.	
A		05XQ0		PBB-20-218-16-LCA		A2	
SCALE		N:S		SHEET		1 OF 1	