




## Model WMPD08-0.7-2.7-X-B2 Power Divider

8-way Microstrip, 0.7-2.7GHz, SMA or N-Female

RoHS  
Compliant

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 [mm] SHOWN FOR CONVENIENCE  
 TOLERANCES ON:  
 2 PL DECIMALS: ± .03  
 3 PL DECIMALS: ± .015  
 ANGLES: ± 1°

Connectors	Order Part Number
SMA-Female	WMPD08-0.7-2.7-S-B2
N-Female	WMPD08-0.7-2.7-N-B2
Other	Special, Consult Factory

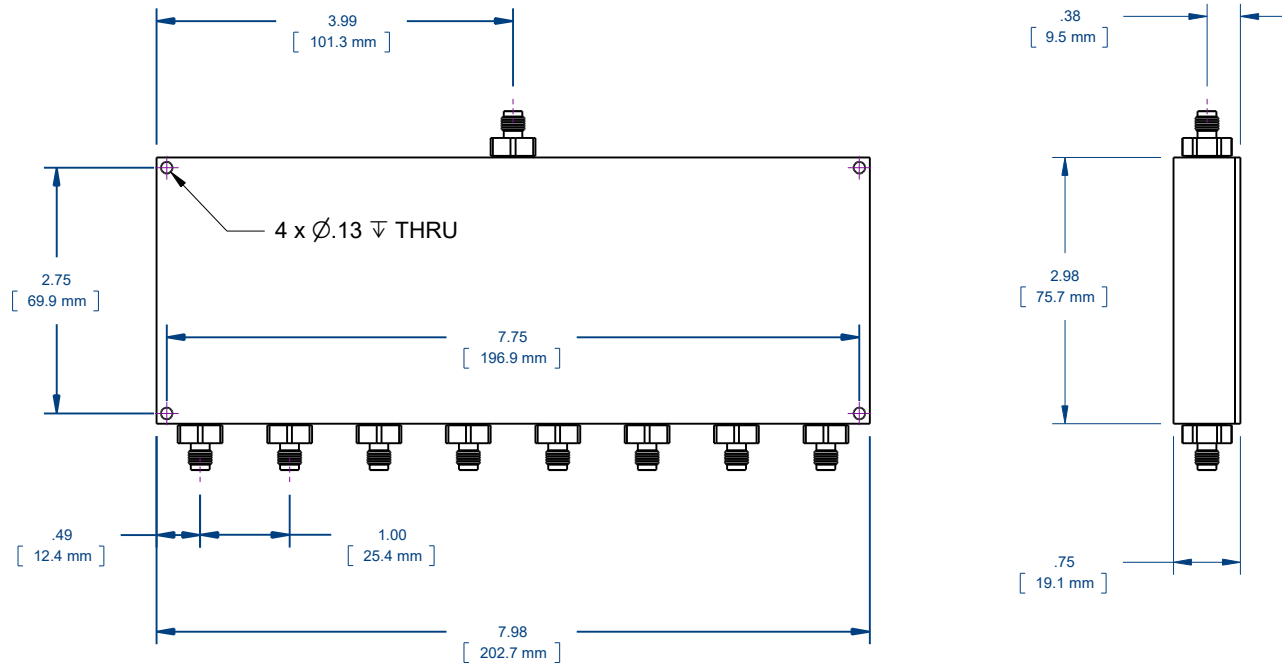

Electrical Specifications	Min	Typ	Max	Unit	Notes
Frequency Range	0.7		2.7	GHz	Usable from 698-MHz.
Impedance		50		Ohms	
Insertion Loss			1.8	dB	Above 9.03 dB loss due to splitting.
Amplitude Unbalance			0.8	dB	
Phase Unbalance			6	deg	
Isolation	20			dB	
Common Port VSWR			1.35	:1	
Split Ports VSWR			1.25	:1	
Input Power			30	W	Coherent splitting into load VSWR 1.20:1 max.
Mechanical Specifications	Min	Typ	Max	Unit	Notes
Operating Temperature	-55		+85	°C	Tested at +25 °C.
Storage Temperature	-55		+125	°C	
Relative Humidity			85	%	Non-condensing.
Operating Environment					Indoor use only.
Enclosure Material					Aluminum Alloy 6061 and 5052
Enclosure Finish					RoHS Compliant Clear Chemical Film per MIL-DTL-5541 Class 3
Connectors Material					Body: Stainless Steel 303 Contact Pin: Beryllium Copper, Gold Plate Insulator: PTFE
Solder Alloy					Sn 96.5, Ag 3.0, Cu 0.5

Specifications subject to change without notice.  
 This document shall not form part of a contract.

SIZE  
**A**

CAGE CODE  
78YZ0

DRWG NO.  
SPEC-WMPD08-0.7-2.7-X-B2

REV.  
0

SCALE 1 : N/A

SHEET