



Made in U.S.A.

## 90-degree Quadrature Hybrid

Stripline, 2-4GHz, SMA-Female

 RoHS  
Compliant

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES


[mm] SHOWN FOR CONVENIENCE

TOLERANCES ON:

2 PL DECIMALS: ± .03

3 PL DECIMALS: ± .015

ANGLES: ± 1°

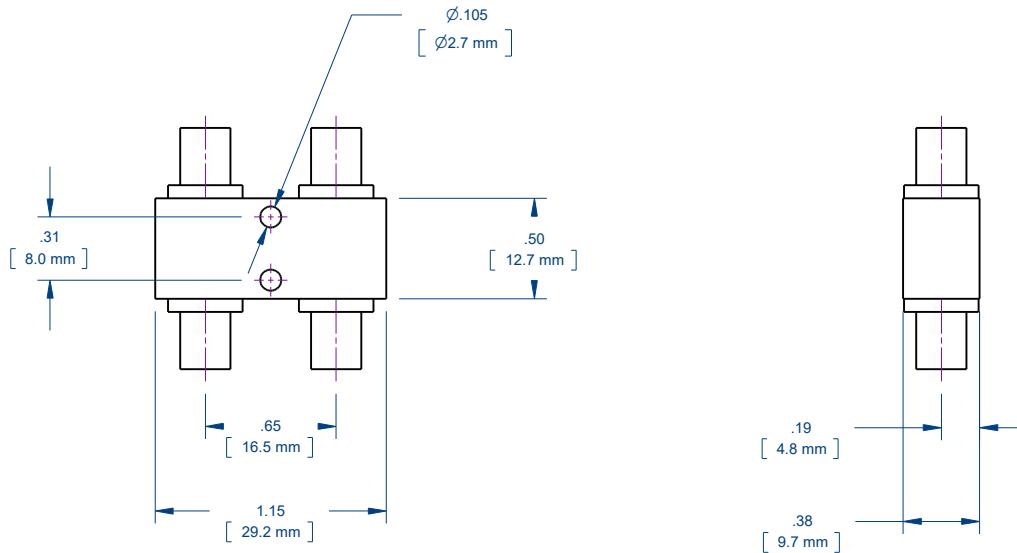

Electrical Specifications	Min	Typ	Max	Unit	Notes
Frequency Range	2		4	GHz	
Impedance		50		Ohms	By design.
Coupling Nominal Value		3.1		dB	Obtained from VNA marker mean value.
Coupling Flatness			±0.6	dB	Obtained from VNA marker peak-to-peak value / 2.
Phase Unbalance		±2		deg	Centered at 90 degree phase shift between outputs.
Isolation	25			dB	
VSWR (All Ports)			1.2	:1	
Input Power (Avg, CW)			50	W	Coherent splitting into load VSWR 1.20:1 max.

Mechanical Specifications	Min	Typ	Max	Unit	Notes
Operating Temperature	-55		+85	°C	Tested at +25 °C.
Relative Humidity			85	%	Non-condensing.
Operating Environment	Indoor use only.				
Enclosure Material	Aluminum Alloy 6061-T651				
Enclosure Finish	RoHS Complaint Clear Chemical Film per MIL-DTL-5541 Class 3				
Connectors Material	Body: Stainless Steel, Passivate Contact Pin: Beryllium Copper, Gold Plate Insulator: PTFE				
Solder Alloy	Sn 96.5, Ag 3.0, Cu 0.5				
Weight	0.6 oz nominal				

REV	DESCRIPTION	DATE	APPROVED
0	Engineering release.	3-8-2018	ETW

 Specifications subject to change without notice.  
This document shall not form part of a contract.

 SIZE  
**A**

 CAGE CODE  
78YZ0

 DRWG NO.  
SPEC-WMQH-2-4-S

 REV.  
0

SCALE 1 : N/A

SHEET