

REVISIONS			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Editorial changes and updates.	14-09-24	Michael A. Radecki
B	Editorial and formatting updates.	25-08-21	Mark Rush

CURRENT DESIGN ACTIVITY CAGE CODE 037Z3  
HAS CHANGED NAMES TO:  
DLA LAND AND MARITIME  
COLUMBUS, OHIO 43218-3990



Prepared in accordance with [ASME Y14.100](#)

Selected item drawing

REV STATUS OF PAGES	REV	B	B	B	B	B	B											
	PAGES	1	2	3	4	5	6											
PMIC N/A	PREPARED BY Ken Bernier							DESIGN ACTIVITY DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OH										
Original date of drawing 21 October 2009	CHECKED BY Ken Bernier							TITLE CAPACITORS, TANTALUM, HYBRID, HERMETICALLY SEALED										
	APPROVED BY Michael A. Radecki																	
	SIZE A		CAGE CODE 037Z3					DWG NO. 09021										
	SCALE N/A		REV B					PAGE 1 OF 6										

## 1. SCOPE

1.1 Scope. This drawing describes the requirements for tantalum hybrid capacitors, hermetically sealed in welded tantalum case with glass to metal anode terminal.

1.2 Part or Identifying Number (PIN). The complete PIN is as follows:



## 2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this drawing. This section does not include documents cited in other sections of this drawing or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents in sections 3 and 4 of this drawing, whether or not they are listed here.

### 2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see [6.2](#)).

#### DEPARTMENT OF DEFENSE STANDARDS

<a href="#">MIL-STD-202-105</a>	-	Method 105, Barometric Pressure (Reduced)
<a href="#">MIL-STD-202-106</a>	-	Method 106, Moisture Resistance
<a href="#">MIL-STD-202-107</a>	-	Method 107, Thermal Shock
<a href="#">MIL-STD-202-112</a>	-	Method 112, Seal
<a href="#">MIL-STD-202-204</a>	-	Method 204, Vibration, High Frequency
<a href="#">MIL-STD-202-208</a>	-	Method 208, Solderability
<a href="#">MIL-STD-202-210</a>	-	Method 210, Resistance to Soldering Heat
<a href="#">MIL-STD-202-211</a>	-	Method 211, Terminal Strength
<a href="#">MIL-STD-202-213</a>	-	Method 213, Shock (Specified Pulse)
<a href="#">MIL-STD-202-214</a>	-	Method 214, Random Vibration
<a href="#">MIL-STD-202-215</a>	-	Method 215, Resistance to Solvents
<a href="#">MIL-STD-1285</a>	-	Marking of Electrical and Electronic Parts

(Copies of these documents are available online at <https://quicksearch.dla.mil/>.)

2.3 Order of precedence. Unless otherwise specified, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3. REQUIREMENTS


3.1 Interface and physical dimensions. The interface and physical dimensions shall be as specified herein (see [figure 1](#)).

3.1.1 Case and capacitor element. The capacitor shall utilize a sintered tantalum anode and ruthenium oxide coated cathodes operating in aqueous electrolyte. The components shall be hermetically sealed in a welded tantalum case with glass-to-metal anode terminal seal.

3.1.2 Mass. 0 – 50 volt parts:  $104 \pm 3$  grams; 63 – 125 volt parts:  $128 \pm 3$  grams.

3.1.3 Pure tin. The use of pure tin, as an underplate or final finish is prohibited both internally and externally. Tin content of capacitor components and solder shall not exceed 97 percent, by mass. Tin shall be alloyed with a minimum of 3 percent lead, by mass (see [6.3](#)).

<b>DEFENSE SUPPLY CENTER, COLUMBUS</b> <b>COLUMBUS, OHIO</b>	<b>SIZE</b> <b>A</b>	<b>CAGE CODE</b> <b>037Z3</b>	<b>DWG NO.</b> <b>09021</b>
		REV B	PAGE 2

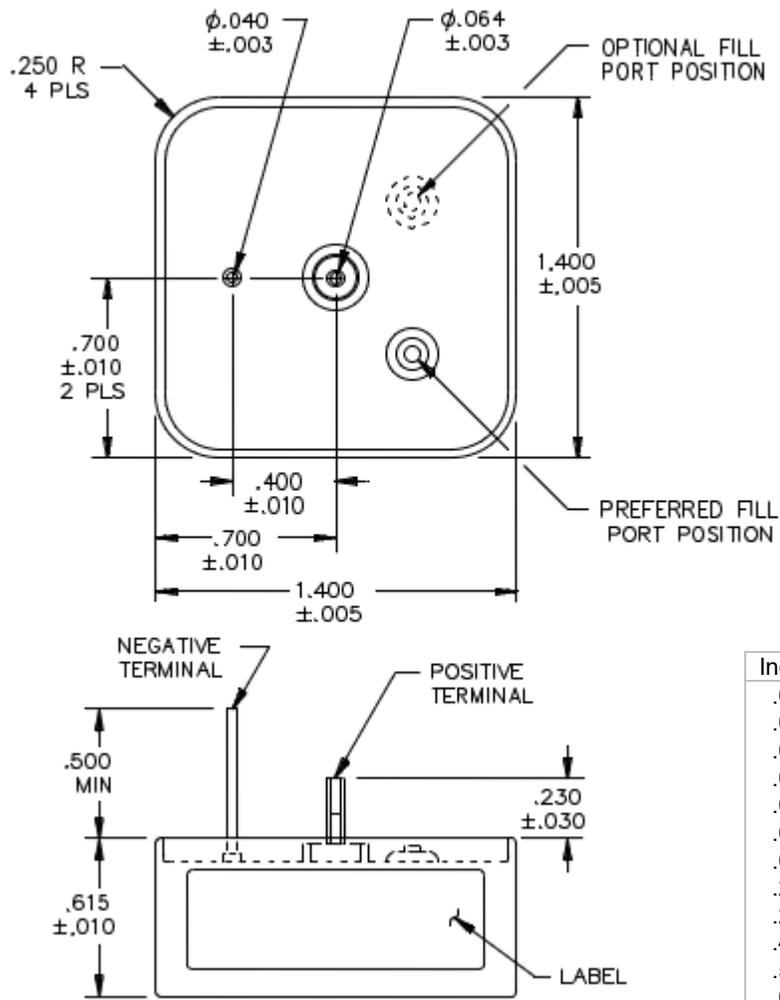

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.

FIGURE 1. Case dimensions and configuration.

<b>DEFENSE SUPPLY CENTER, COLUMBUS</b> <b>COLUMBUS, OHIO</b>	<b>SIZE</b> <b>A</b>	<b>CAGE CODE</b> <b>037Z3</b>	<b>DWG NO.</b> <b>09021</b>
		<b>REV B</b>	<b>PAGE 3</b>

3.1.4 Storage temperature. The storage temperature shall be -62°C to +130°C.

3.1.5 Operating temperature range. The operating temperature range shall be -55°C to +85°C, de-rated to +125°C.

3.2 Electrical characteristics.

3.2.1 Rated voltage. The rated voltage shall be in accordance with table I at -55°C to +85°C, de-rated to + 125°C.

3.2.2 Surge voltage. Surge voltage shall be 1000 cycles of rated surge voltage (see table I) at +85°C. Each cycle shall consist of a 30 second surge voltage application followed by a 330 second discharge period. The part shall be charged and discharged through a 1000 ohm resistor. The capacitor shall not be visibly damaged and the electrical characteristics shall remain within specification.

3.2.3 Dielectric. The dielectric shall be an aqueous electrolyte.

3.2.4 DC leakage current (DCL). The maximum DC leakage current shall be as specified in table I following 5 minutes at the working voltage and +25°C (see table II).

3.2.5 Capacitance. Capacitance shall be as specified in table I at 120Hz and +25°C, ± 20%.

3.2.6 Capacitance tolerance. The capacitance tolerance shall be ± 20 percent at +25°C.

3.2.7 Equivalent series resistance (ESR). The maximum equivalent series resistance (ESR) shall be as specified in table I at 1 kHz and +25°C.

TABLE I. Electrical characteristics.

DLA Land and Maritime drawing PIN 09021-	Capacitance (µF)	Rated voltage @+85°C (V <sub>dc</sub> )	Rated voltage @+125°C (V <sub>dc</sub> )	Surge Voltage (V <sub>dc</sub> )	ESR (max.) (Ω)	Leakage current (max.) (µA)
01	200,000	10	6	11	0.025	400
02	130,000	16	9.5	18	0.025	400
03	75,000	25	15	28	0.035	400
04	50,000	35	20	39	0.035	400
05	30,000	50	30	55	0.035	500
06	16,000	63	38	69	0.035	500
07	10,000	80	48	88	0.040	600
08	9,000	85	51	94	0.050	600
09	7,000	100	60	110	0.050	600
10	6,000	110	65	127	0.065	600
11	4,200	125	75	138	0.065	600

3.3 Environmental characteristics.

3.3.1 Thermal shock. Thermal shock shall be as specified in MIL-STD-202-107, test condition A.

3.3.2 Moisture resistance. Moisture resistance shall be as specified in MIL-STD-202-106. Polarization voltage shall be 6V.

3.3.3 Seal. The capacitor shall be hermetically sealed such that the case does not leak electrolyte or vent any gas when exposed to a vacuum in accordance with MIL-STD-202-112, test condition C, procedure IIIa.

3.3.4 Barometric pressure (reduced). Barometric pressure (reduced) shall be in accordance with MIL-STD-202-105, condition D (100,000 ft.).

<b>DEFENSE SUPPLY CENTER, COLUMBUS COLUMBUS, OHIO</b>	<b>SIZE A</b>	<b>CAGE CODE 037Z3</b>	<b>DWG NO. 09021</b>
		<b>REV B</b>	<b>PAGE 4</b>

3.4 Physical characteristics.

3.4.1 Shock (specified pulse). Shock (specified pulse) shall be as specified in [MIL-STD-202-213](#), test condition G (50g, 11 ms).

3.4.2 Vibration, high frequency. Vibration, high frequency shall be in accordance with [MIL-PRF-202-204](#), test condition D (20g peak, 12 sweeps / axis).

3.4.3 Resistance to solder heat. The capacitor shall withstand solder dipping of the terminals at +260°C for 10 seconds in accordance with [MIL-STD-202-210](#), test condition B. The capacitor shall not be visibly damaged and the electrical characteristics shall not be affected.

3.4.4 Terminal strength. The capacitor terminals shall withstand a 5-pound pull test for 30 seconds in accordance with [MIL-STD-202-211](#), test condition A. The capacitor shall not be visibly damaged and the electrical characteristics shall not be affected.

3.4.5 Solderability. The terminations shall be solderable when tested in accordance with [MIL-STD-202-208](#).

3.4.6 Resistance to solvents. Resistance to solvents shall be in as specified in [MIL-STD-202-215](#).

3.4.7 Random vibration. Random vibration shall be as specified in [MIL-STD-202-214](#), test condition I-D (1.5 hours / axis, 12g rms).

3.4.8 Fungus. The capacitor materials shall not support fungus growth and shall not be a nutrient to fungus.

3.5 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.6 Certificate of compliance. A certificate of compliance shall be required from manufacturers requesting to be an approved source of supply.

3.7 Manufacturer eligibility: To be eligible for listing as an approved source of supply a manufacturer shall perform all testing specified herein on a sample of parts agreed upon by the manufacturer and DLA Land and Maritime-VA.

3.8 Marking. Marking shall be in accordance with [MIL-STD-1285](#), except the capacitor shall be marked with the PIN as specified herein (see [1.2](#)), the manufacturer's name or Commercial and Government Entity (CAGE) code, date code, lot symbol, and polarity.

3.9 Workmanship. The capacitor shall be uniform in quality and free from any defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Qualification inspection. Qualification inspection is not required.

4.2 Conformance inspections.

4.2.1 Inspection of product for delivery. Inspection of product for delivery shall consist of DCL, capacitance, and ESR as specified in [3.2.4](#), [3.2.5](#), and [3.2.7](#) respectively.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see [6.2](#)). When packaging of materiel is to be performed by DoD or in-house personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

<b>DEFENSE SUPPLY CENTER, COLUMBUS</b> <b>COLUMBUS, OHIO</b>	<b>SIZE</b> <b>A</b>	<b>CAGE CODE</b> <b>037Z3</b>	<b>DWG NO.</b> <b>09021</b>
		<b>REV B</b>	<b>PAGE 5</b>

6. NOTES

(This section contains information of a general or explanatory nature, which may be helpful, but is not mandatory.)

6.1 Intended use. Hybrid capacitors covered by this drawing are intended mainly for use in defense electronic systems, avionics, and weapon systems.

6.2 Ordering data. The contract or purchase order should specify the following:

- a. Complete DLA Land and Maritime CAGE code and PIN (see 1.2).
- b. Requirements for delivery of one copy of the conformance inspection data or certificate of compliance that parts have passed conformance inspection with each shipment of parts by the manufacturer.
- c. Requirements for packaging and packing (see 5.1).
- d. Requirements for notification of change of product to acquiring activity, if applicable.

6.3 Tin whisker growth. The use of alloys with tin content greater than 97 percent, by mass, may exhibit tin whisker growth problems after manufacture. Tin whiskers may occur anytime from a day to years after manufacturer and can develop under typical operating conditions, on products that use such materials. Conformal coatings applied over top of a whisker prone surface will not prevent the formation of tin whiskers. Alloys of 3 percent lead, by mass, have shown to inhibit the growth of tin whiskers. For additional information on this matter, refer to [ASTM-B545](#) (Standard Specification for Electrodeposited Coatings of Tin).

6.4 Replaceability. Capacitors covered by this drawing will replace the same commercial device covered by contractor prepared specification or drawing.

6.5 Users of record. Coordination of this document for future revisions is coordinated only with the approved source(s) of supply and the users of record of this document. Requests to be added as a recorded user of this drawing may be achieved online at [capacitorfilter@dla.mil](mailto:capacitorfilter@dla.mil) or if in writing to: DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990 or by telephone (614) 692-4709 or DSN 850-4709.

6.6 Changes from previous issue. The margins of this drawing are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

6.7 Approved sources of supply. Approved sources of supply are listed herein. Additional sources will be added as they become available. For assistance in the use of this drawing, contact DLA Land and Maritime, ATTN: VAT, P. O. Box 3990, Columbus, OH 43218-3990, by e-mail to [capacitorfilter@dla.mil](mailto:capacitorfilter@dla.mil), or by telephone (614) 692-4709 or DSN 850-4709.

DLA Land and Maritime drawing PIN	Vendor similar type	Vendor CAGE	Vendor name and address
09021- 1/			
01	THS3010204	06MN5	Evans Capacitor Company 72 Boyd Ave. East Providence, RI 02914-1202
02	THS3016134		
03	THS3025753		
04	THS3035503		
05	THS3050303		
06	THS3063163		
07	THS3080103		
08	THS3085902		
09	THS3100702		
10	THS3110602		
11	THS3125422		

1/ Parts must be purchased to this DLA Land and Maritime CAGE code and PIN to assure that all performance requirements and tests are met.

<b>DEFENSE SUPPLY CENTER, COLUMBUS</b> <b>COLUMBUS, OHIO</b>	<b>SIZE</b> <b>A</b>	<b>CAGE CODE</b> <b>037Z3</b>	<b>DWG NO.</b> <b>09021</b>
		<b>REV B</b>	<b>PAGE 6</b>