

Ultra-High Q

XQ

Series



Features

- Ultra-high Q
- Low ESR/ESL
- Ultra-stable dielectric characteristic ($\pm 30\text{ppm}/^\circ\text{C}$)
- Capacitance (0.1 pF to 1000pF)
- Available in narrow tolerances
- Size 01005 to 1111
- Voltage up to 1500V
- Operating temperature to 150°C (X8G)


Applications

- Power station
- Base station
- UHF/microwave
- Timing circuits
- Mixers


Product Overview

Eulex ultra-high Q and ultra-low ESR XQ-series capacitors feature ultra-high Q, ultra-high self-resonance frequencies and ultra-low ESR. Manufactured with temperature and voltage stable NP0 & X8G dielectrics ($\pm 30\text{ppm}/^\circ\text{C}$), Pb-free terminations and copper electrodes.

Ultra-High Q

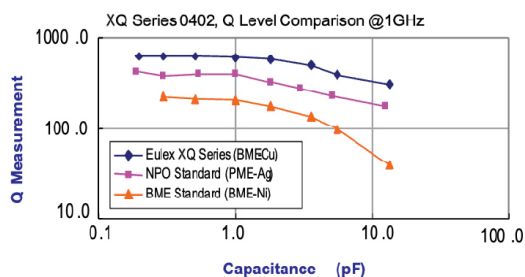

Ultra-Low ESR

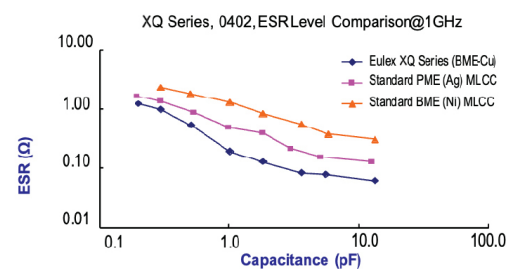

Part Numbering System

XQ	G	02	N	0R5	B	N	T
Series	Voltage Code	Case Code	Dielectric Type	* Capacitance	Tolerance	Termination	** Packaging
Ultra-High Q	A = 6.3VDC	01 = 01005	N = NP0	R05 = 0.05pF	A = $\pm 0.05\text{pF}$	N = Cu/Ni/Sn	T = 7" reel
	C = 10VDC	02 = 0201	G = X8G	0R2 = 0.20pF	B = $\pm 0.10\text{pF}$		R = 13" reel
	E = 16VDC	04 = 0402		1R0 = 1.0pF	C = $\pm 0.25\text{pF}$		
	L = 25VDC	05 = 0505		2R7 = 2.7pF	D = $\pm 0.5\text{pF}$		
	G = 50VDC	06 = 0603		270 = 27pF	F = $\pm 1\%$		
	B = 100VDC	08 = 0805		271 = 270pF	G = $\pm 2\%$		
	R = 200VDC	11 = 1111		102 = 1000pF	J = $\pm 5\%$		
	H = 250VDC						
	S = 500VDC						
	F = 1500VDC						

* Below 10pF, R denotes a decimal point.

For 10pF and above, first 2 digits are significant values and 3rd digit indicates the number of zeros.


** 0505 and 1111 Case sizes shipped in plastic carrier tape. All other case sizes are shipped in paper carrier.



Case Size & Dimensions

Case Size EIA (metric)	Length (L) inch (mm)	Width (W) Inch (mm)	Thickness (T) inch (mm)	End-Band (B) inch (mm)
01 01005 (0402)	.016±.001 (0.40±0.02)	.008±.001 (0.20±0.02)	.008±.001 (0.20±0.02)	.004±.001 (0.10±0.03)
02 0201 (0603)	.024±.001 (0.60±0.03)	0.012±.001 (0.30±0.03)	0.012±.001 (0.30±0.03)	.006±.002 (0.15±0.05)
04 0402 (1005)	.039±.002 (1.00±0.05)	.020±.002 (0.50±0.05)	.020±.002 (0.50±0.05)	.010+.002/-0.004 (0.25+0.05/-0.10)
05 0505 (1414)	.055+.015/-0.010 (1.40+0.38/-0.25)	.055±.015 (1.40±0.38)	.045±.006 (1.15±0.15)	.010+.010/-0.005 (0.25+0.25/-0.13)
06 0603 (1608)	.063±.004 (1.60±0.10)	.031±.004 (0.80±0.10)	.031±.003 (0.80±0.07)	.016±.005 (0.40±0.15)
06 +0603 (1608)	.063+.006/-0.004 (1.60+0.15/-0.10)	.031+.006/-0.004 (0.80+0.15/-0.10)	.020±.004 (0.50±0.10)	.016±.005 (0.40±0.15)
08 0805 (2012)	.079±.008 (2.00±0.20)	.049±.008 (1.25±0.20)	.033±.004 (0.85±0.10)	.020±.008 (0.50±0.20)
08 +0805 (2012)	.079±.006 (2.00±0.15)	.049±.004 (1.25±0.10)	.024±.004 (0.60±0.10)	.020±.008 (0.50±0.20)
11 1111 (2828)	.110+.020/-0.010 (2.79+0.51/-0.25)	.110±.015 (2.79±0.38)	≤.070 (≤1.78)	.015±.010 (0.38±0.25)

+ Thin profile for capacitance values ≤0.2pF



Dielectric Properties & Electrical Summary

Dielectric	NP0 (Class I)	X8G (Class I)
Size	01005, 0201, 0402, 0505, 0603, 0805, 1111	0402, 0603, 0805
Capacitance 1	0.1pF to 1000pF	0.2pF to 82pF
Capacitance Tolerance	Cap≤5pF: A (±0.05pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: B (±0.1pF), C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%)	
Rated Voltages (WVDC)	6.3V, 10V, 25V, 50V, 100V, 200V, 250V, 500V, 1500V	200V, 250V, 500V
Insulation Resistance	≥10GΩ @ 25°C or RxC≥100Ω-F whichever is smaller	
Operating Temperature	-55 to +125°C	-55 to +150°C
Capacitance Change (TC)	±30ppm/°C	
Dissipation Factor (DF)	0.10% Max	0.15% Max

¹ Measured at 1.0±0.2Vrms, 1.0MHz±10% for capacitance values ≤1000pF and 1.0kHz±10% for capacitance>1000pF

Available Capacitance Values

X8G Dielectric (0603 - 0805)

Capacitance	Case Size Voltage	0402	0603	0805		Tolerance Code
		200	250	250	500	
0.1pF (0R2)	●					A, B
0.2pF (0R2)	●			○	○	A, B
0.3pF (0R3)	●			●	●	A, B
0.4pF (0R4)	●	●	●	●	●	A, B
0.5pF (0R5)	●	●	●	●	●	A, B, C
0.6pF (0R6)	●	●	●	●	●	A, B, C
0.7pF (0R7)	●	●	●	●	●	A, B, C
0.8pF (0R8)	●	●	●	●	●	A, B, C
0.9pF (0R9)	●	●	●	●	●	A, B, C
1.0pF (1R0)	●	●	●	●	●	A, B, C
1.1pF (1R1)	●	●	●	●	●	A, B, C
1.2pF (1R2)	●	●	●	●	●	A, B, C
1.3pF (1R3)	●	●	●	●	●	A, B, C
1.4pF (1R4)	●	●	●	●	●	A, B, C
1.5pF (1R5)	●	●	●	●	●	A, B, C
1.6pF (1R6)	●	●	●	●	●	A, B, C
1.7pF (1R7)	●	●	●	●	●	A, B, C
1.8pF (1R8)	●	●	●	●	●	A, B, C
1.9pF (1R9)	●	●	●	●	●	A, B, C
2.0pF (2R0)	●	●	●	●	●	A, B, C
2.1pF (2R1)	●	●	●	●	●	A, B, C
2.2pF (2R2)	●	●	●	●	●	A, B, C
2.3pF (2R3)	●	●	●	●	●	A, B, C
2.4pF (2R4)	●	●	●	●	●	A, B, C
2.5pF (2R5)	●	●	●	●	●	A, B, C
2.6pF (2R6)	●	●	●	●	●	A, B, C
2.7pF (2R7)	●	●	●	●	●	A, B, C
2.8pF (2R8)	●	●	●	●	●	A, B, C
2.9pF (2R9)	●	●	●	●	●	A, B, C
3.0pF (3R0)	●	●	●	●	●	A, B, C
3.1pF (3R1)	●	●	●	●	●	A, B, C
3.2pF (3R2)	●	●	●	●	●	A, B, C
3.3pF (3R3)	●	●	●	●	●	A, B, C
3.4pF (3R4)	●	●	●	●	●	A, B, C
3.5pF (3R5)	●	●	●	●	●	A, B, C
3.6pF (3R6)	●	●	●	●	●	A, B, C
3.7pF (3R7)	●	●	●	●	●	A, B, C
3.8pF (3R8)	●	●	●	●	●	A, B, C
3.9pF (3R9)	●	●	●	●	●	A, B, C
4.0pF (4R0)	●	●	●	●	●	A, B, C
4.1pF (4R1)	●	●	●	●	●	A, B, C
4.2pF (4R2)	●	●	●	●	●	A, B, C
4.3pF (4R3)	●	●	●	●	●	A, B, C
4.4pF (4R4)	●	●	●	●	●	A, B, C
4.5pF (4R5)	●	●	●	●	●	A, B, C
4.6pF (4R6)	●	●	●	●	●	A, B, C
4.7pF (4R7)	●	●	●	●	●	A, B, C
4.8pF (4R8)	●	●	●	●	●	A, B, C
4.9pF (4R9)	●	●	●	●	●	A, B, C
5.0pF (5R0)	●	●	●	●	●	B, C, D
5.1pF (5R1)	●	●	●	●	●	B, C, D
5.2pF (5R2)	●	●	●	●	●	B, C, D
5.3pF (5R3)	●	●	●	●	●	B, C, D
5.4pF (5R4)	●	●	●	●	●	B, C, D
5.5pF (5R5)	●	●	●	●	●	B, C, D
5.6pF (5R6)	●	●	●	●	●	B, C, D
5.7pF (5R7)	●	●	●	●	●	B, C, D
5.8pF (5R8)	●	●	●	●	●	B, C, D
5.9pF (5R9)	●	●	●	●	●	B, C, D
6.0pF (6R0)	●	●	●	●	●	B, C, D

CONTINUED - X8G Dielectric (0603 - 0805)

Capacitance	Case Size Voltage	0402	0603	0805		Tolerance Code
		200	250	250	500	
6.1pF (6R1)	●	●	●	●	●	B, C, D
6.2pF (6R2)	●	●	●	●	●	B, C, D
6.3pF (6R3)	●	●	●	●	●	B, C, D
6.4pF (6R4)	●	●	●	●	●	B, C, D
6.5pF (6R5)	●	●	●	●	●	B, C, D
6.6pF (6R6)	●	●	●	●	●	B, C, D
6.7pF (6R7)	●	●	●	●	●	B, C, D
6.8pF (6R8)	●	●	●	●	●	B, C, D
6.9pF (6R9)	●	●	●	●	●	B, C, D
6.9pF (6R9)	●	●	●	●	●	B, C, D
7.0pF (7R0)	●	●	●	●	●	B, C, D
7.1pF (7R1)	●	●	●	●	●	B, C, D
7.2pF (7R2)	●	●	●	●	●	B, C, D
7.3pF (7R3)	●	●	●	●	●	B, C, D
7.4pF (7R4)	●	●	●	●	●	B, C, D
7.5pF (7R5)	●	●	●	●	●	B, C, D
7.6pF (7R6)	●	●	●	●	●	B, C, D
7.7pF (7R7)	●	●	●	●	●	B, C, D
7.8pF (7R8)	●	●	●	●	●	B, C, D
7.9pF (7R9)	●	●	●	●	●	B, C, D
8.0pF (8R0)	●	●	●	●	●	B, C, D
8.1pF (8R1)	●	●	●	●	●	B, C, D
8.2pF (8R2)	●	●	●	●	●	B, C, D
8.3pF (8R3)	●	●	●	●	●	B, C, D
8.4pF (8R4)	●	●	●	●	●	B, C, D
8.5pF (8R5)	●	●	●	●	●	B, C, D
8.6pF (8R6)	●	●	●	●	●	B, C, D
8.7pF (8R7)	●	●	●	●	●	B, C, D
8.8pF (8R8)	●	●	●	●	●	B, C, D
8.9pF (8R9)	●	●	●	●	●	B, C, D
9.0pF (9R0)	●	●	●	●	●	B, C, D
9.1pF (9R1)	●	●	●	●	●	B, C, D
9.2pF (9R2)	●	●	●	●	●	B, C, D
9.3pF (9R3)	●	●	●	●	●	B, C, D
9.4pF (9R4)	●	●	●	●	●	B, C, D
9.5pF (9R5)	●	●	●	●	●	B, C, D
9.6pF (9R6)	●	●	●	●	●	B, C, D
9.7pF (9R7)	●	●	●	●	●	B, C, D
9.8pF (9R8)	●	●	●	●	●	B, C, D
9.9pF (9R9)	●	●	●	●	●	B, C, D
10pF (100)	●	●	●	●	●	F, G, J
11pF (110)	●	●	●	●	●	F, G, J
12pF (120)	●	●	●	●	●	F, G, J
13pF (130)	●	●	●	●	●	F, G, J
15pF (150)	●	●	●	●	●	F, G, J
16pF (160)	●	●	●	●	●	F, G, J
18pF (180)	●	●	●	●	●	F, G, J
20pF (200)	●	●	●	●	●	F, G, J
22pF (220)	●	●	●	●	●	F, G, J
24pF (240)	●	●	●	●	●	F, G, J
27pF (270)	●	●	●	●	●	F, G, J
30pF (300)	●	●	●	●	●	F, G, J
33pF (330)	●	●	●	●	●	F, G, J
36pF (360)	●	●	●	●	●	F, G, J
39pF (390)	●	●	●	●	●	F, G, J
43pF (430)	●	●	●	●	●	F, G, J
47pF (470)	●	●	●	●	●	F, G, J
56pF (560)	●	●	●	●	●	F, G, J
68pF (680)	●	●	●	●	●	F, G, J
82pF (820)	●	●	●	●	●	F, G, J

NP0 Dielectric (01005)

Capacitance	Case Size Voltage	01005		Tolerance Code
		16	25	
0.2pF (0R2)	●	●	●	A, B
0.3pF (0R3)	●	●	●	A, B
0.4pF (0R4)	●	●	●	A, B
0.5pF (0R5)	●	●	●	A, B, C
0.6pF (0R6)	●	●	●	A, B, C
0.7pF (0R7)	●	●	●	A, B, C
0.75pF (R75)	●	●	●	A, B, C
0.8pF (0R8)	●	●	●	A, B, C
0.9pF (0R9)	●	●	●	A, B, C
1.0pF (1R0)	●	●	●	A, B, C
1.2pF (1R2)	●	●	●	A, B, C
1.5pF (1R5)	●	●	●	A, B, C
1.8pF (1R8)	●	●	●	A, B, C
2.0pF (2R0)	●	●	●	A, B, C
2.2pF (2R2)	●	●	●	A, B, C
2.7pF (2R7)	●	●	●	A, B, C
3.0pF (3R0)	●	●	●	A, B, C
3.3pF (3R3)	●	●	●	A, B, C
3.9pF (3R9)	●	●	●	A, B, C
4.0pF (4R0)	●	●	●	A, B, C
4.7pF (4R7)	●	●	●	A, B, C
5.0pF (5R0)	●	●	●	A, B, C
5.6pF (5R6)	●	●	●	B, C, D
6.0pF (6R0)	●	●	●	B, C, D
6.8pF (6R8)	●	●	●	B, C, D
7.0pF (7R0)	●	●	●	B, C, D
8.0pF (8R0)	●	●	●	B, C, D
8.2pF (8R2)	●	●	●	B, C, D
9.0pF (9R0)	●	●	●	B, C, D
10pF (100)	●	●	●	C, D, G
12pF (120)	●	●	●	J
15pF (150)	●	●	●	J
20pF (200)	●	●	●	J
22pF (220)	●	●	●	J

NP0 Dielectric (0201 to 1111)


[illegible]

CONTINUED - NP0 Dielectric (0201 to 1111)




Page 5

Frequency Characteristics




SRF vs Cap (0201 thru 111)

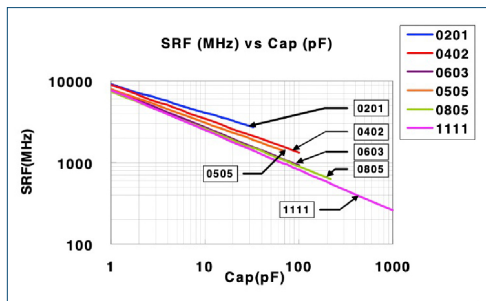




01005 Frequency Characteristics

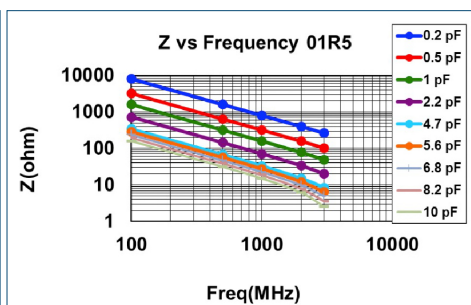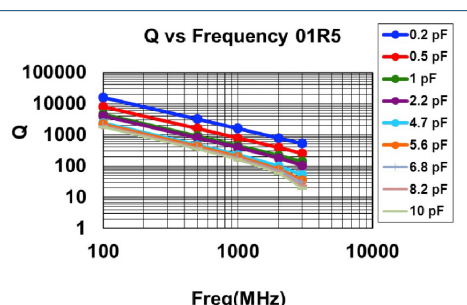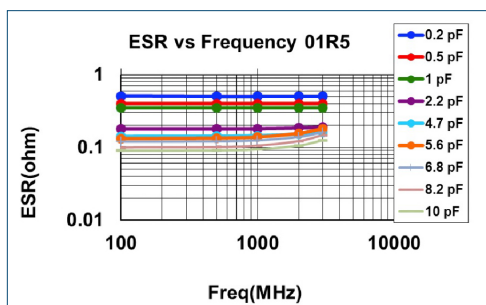

0201 Frequency Characteristics

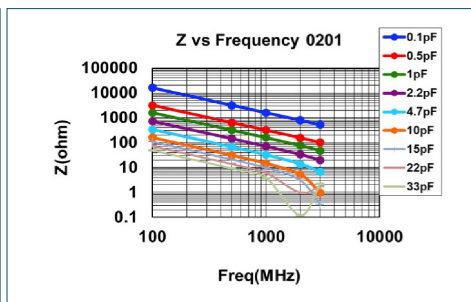
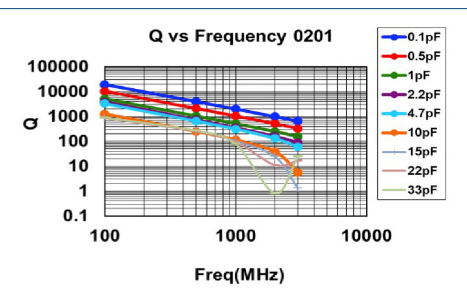
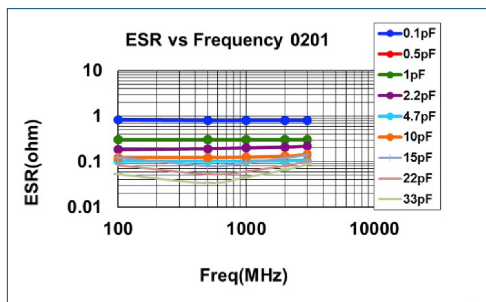


0402 Frequency Characteristics

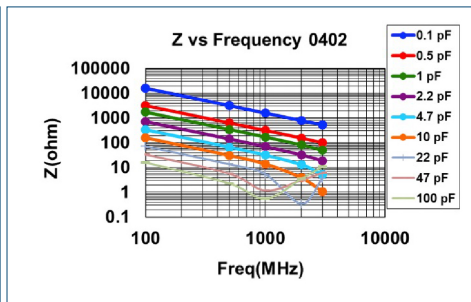
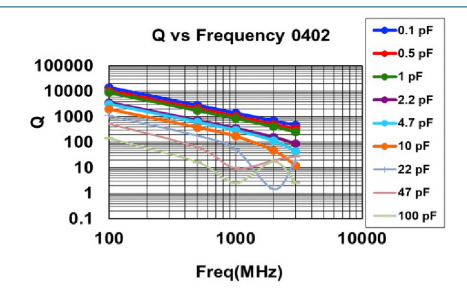
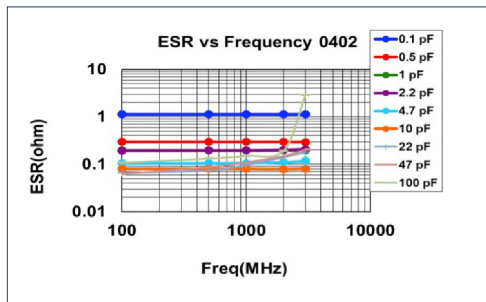


Frequency Characteristics




0603 Frequency Characteristics

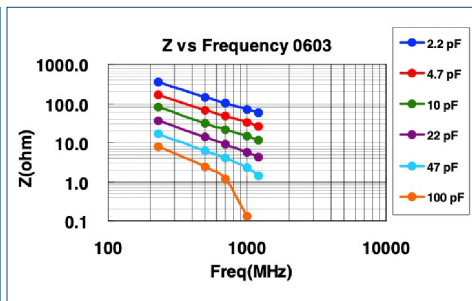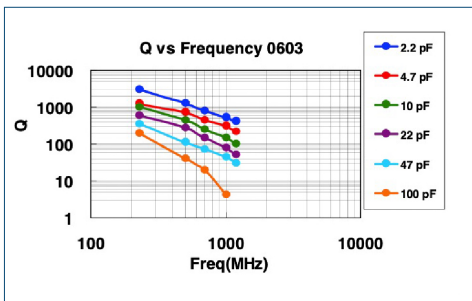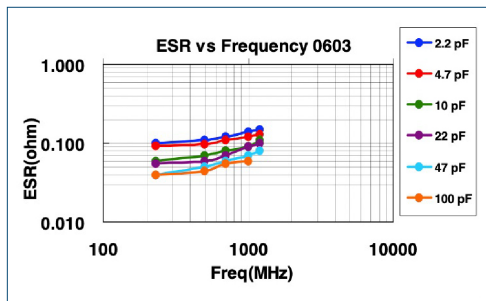




0805 Frequency Characteristics

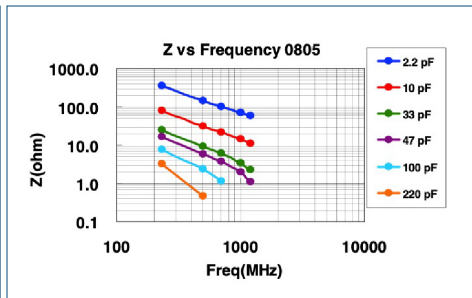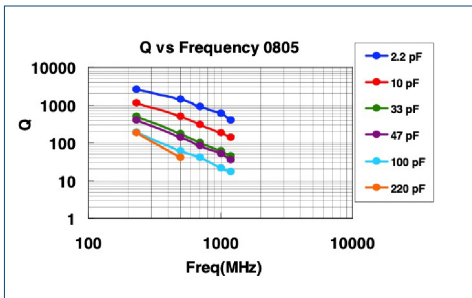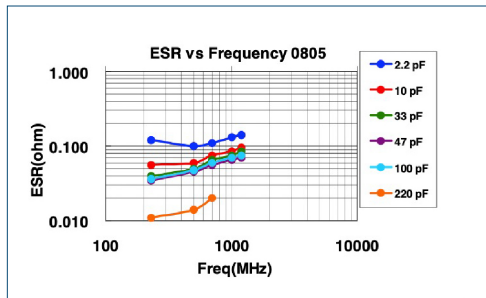

0505 Frequency Characteristics

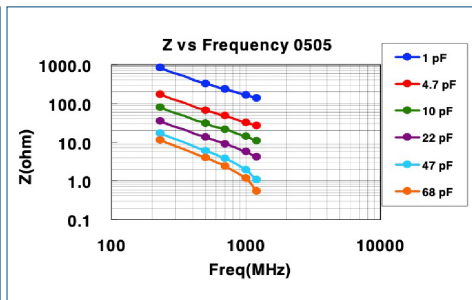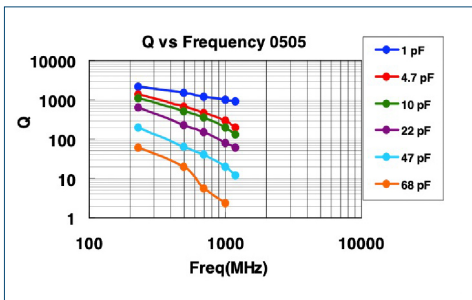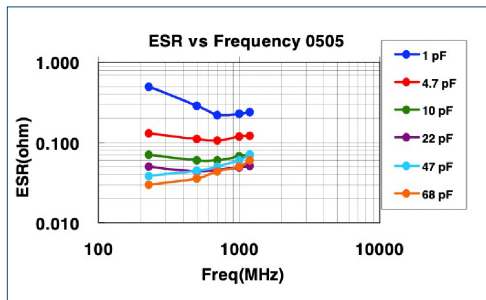

1111 Frequency Characteristics

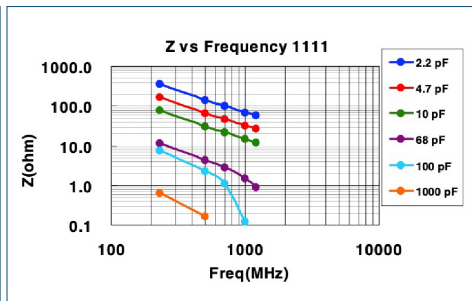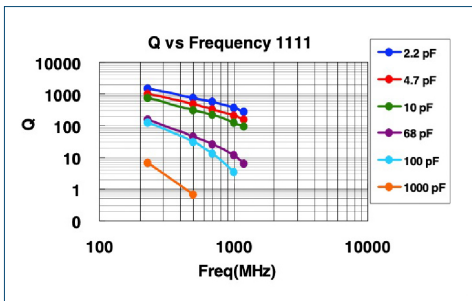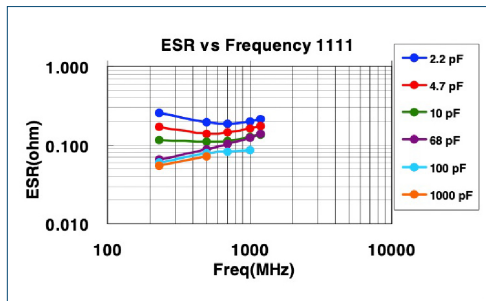

Test Conditions

No.	Item	Test Condition	Requirements
1	Visual & Dimensions	Suitable optical or mechanical measurement system	- No major defects - Conforms to individual specification sheet
2	Capacitance	- For capacitance $\leq 1000\text{pF}$: $1.0 \pm 0.2\text{Vrms}$, $1.0\text{MHz} \pm 10\%$ - For capacitance values $> 1000\text{pF}$: $1.0 \pm 0.2\text{Vrms}$, $1.0\text{kHz} \pm 10\%$ - Measured at room temperature	Shall not exceed specified capacitance plus allowed tolerance
3	Dielectric Strength	- Applied voltage: $\leq 100\text{V}$: 250% of rated voltage. (RF02: 300% rated voltage.) $200\text{V} \sim 300\text{V}$: 200% rated voltage. $500\text{V} \sim 999\text{V}$: 150% rated voltage. $1000\text{V} \sim 3000\text{V}$: 120% rated voltage - Duration: 1 to 5 sec. - Charge & discharge current $< 50\text{mA}$.	No evidence of damage or arc-over during test.
4	Insulation Resistance	- Time rated voltage applied $\leq 100\text{V} \rightarrow$ max. 120 sec. $\geq 200\text{V} \rightarrow$ max 60 sec. (Max 500V) - Test at room temperature	$\geq 10\text{G}\Omega$ or $R_{\text{xC}} \geq 100\Omega\text{-F}$ whichever is smaller
5	Temperature Coefficient	- No electrical load - Allow temperature to equilibrate prior to measure	Capacitance change: within $\pm 30\text{ppm}/^\circ\text{C}$; $\rightarrow \text{NP0}$: $-55 \sim 125^\circ\text{C}$ at 25°C $\rightarrow \text{X8G}$: $-55 \sim 150^\circ\text{C}$ at 25°C
6	Termination Adhesion Strength	- Applied Force 01005: 1N; 0201: 2N; 0402 to 0603: 5N; > 0603: 10N - Test time: 10 ± 1 sec.	No major damage or removal of termination
7	Vibration Resistance	- Vibration frequency: $10 \sim 55$ Hz/min. - Total amplitude: 1.5mm - Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.) - Cap./DF(Q) Measurement to be made after de-aging at 150°C for 1hr then set for 24 ± 2 hrs at room temp	- No major damage - Capacitance change, Q and DF to meet initial specification
8	Solderability	- Solder temperature: $235 \pm 5^\circ\text{C}$ - Dipping time: 2 ± 0.5 sec.	95% min. coverage of all metalized area.
9	Bend Test	Force applied to middle of substrate at a rate of approx. 1mm/s until 1mm deflection achieved, pressure maintained for 5 ± 1 sec.	- No major damage - Capacitance change before and after test within $\pm 5.0\%$ or $\pm 0.5\text{pF}$ (whichever is larger).
10	Resistance to Soldering Heat	- Solder temperature: $260 \pm 5^\circ\text{C}$ - Dipping time: 10 ± 1 sec - Preheating: $120 \sim 150^\circ\text{C}$ for 1 min before immersion - Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then 24hr age at RT	- No major damage - Capacitance change: within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ whichever is larger. Q/D.F., I.R. and dielectric strength meet initial spec 25% max. leaching on each edge.

Test Conditions


No.	Item	Test Condition	Requirements																												
11	Temperature Cycle	- Conduct 5-cycles: - Min operating temp: +0/-3°C for 30±3mins - Room temp for 2-3mins - Max operating temp: +0/-3°C for 30±3mins - Room Temp for 2-3 mins - Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then 24±2hr age at RT	- No major defects - Cap change: within ±2.5% or ±0.25pF whichever is larger. - Q/D.F., I.R. and dielectric strength: To meet initial requirements.																												
12	Humidity (Steady State)	- Test temp.: 40±2°C - Humidity: 90~95% RH - Test time: 500+24/-0hrs. - Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then 24±2hr age at RT	- No major damage - Cap change: within ±5.0% or ±0.5pF whichever is larger. - Q/D.F. value: Cap≥30pF, Q≥350; 10pF≤Cap<30pF, Q≥275+2.5C - I.R. ≥1GΩ																												
13	Humidity (Under Load)	- Test temp.: 40±2°C - Humidity: 90~95%RH - Test time: 500+24/-0 hrs. - Applied voltage: rated voltage (MAX. 500V) - Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then 24±2hr age at RT	- No major damage - Cap change: within ±7.5% or ±0.75pF whichever is larger. - Q/D.F. value: Cap≥30pF, Q≥200; Cap<30pF, Q≥100+10/3C - I.R.: ≥500MΩ.																												
14	High Temperature Load	- Test temp.: NP0: 125±3°C X8G: 150±3°C - Applied voltage: (1) 10V≤Ur<500V: 200% rated voltage. (2) ≤6.3V or 500V: 150% rated voltage. (3) Ur≥630V: 120% rated voltage. - Test time: 1000+24/-0 hrs. - Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then 24±2hr age at RT	- No major damage - Cap change: within ±3.0% or ±0.3pF whichever is larger. - Q/D.F. value: Cap≥30pF, Q≥350; 10pF≤Cap<30pF, Q≥275+2.5C - I.R. ≥1GΩ																												
15	ESR	The ESR should be measured at room temperature and tested at 1.0±0.1 GHz.	<table> <tr> <td rowspan="5">01005</td><td>0.2pF≤Cap≤1pF: < 700mΩ/pF</td><td rowspan="5">0201</td><td>0.1pF≤Cap≤1pF: < 350mΩ/pF</td></tr> <tr> <td>1pF<Cap≤2pF: < 600mΩ</td><td></td></tr> <tr> <td>2pF<Cap≤5pF: < 500mΩ</td><td>1pF<Cap≤5pF: < 300mΩ</td></tr> <tr> <td>5pF<Cap≤10pF: < 300mΩ</td><td></td></tr> <tr> <td>10pF<Cap≤22pF: < 350mΩ</td><td>5pF<Cap≤22pF: < 250mΩ</td></tr> <tr> <td rowspan="3">0402</td><td>0.1pF≤Cap≤1pF: < 350mΩ/pF</td><td rowspan="3">0603</td><td>0.1pF≤Cap≤1pF: < 1500mΩ</td></tr> <tr> <td>1pF<Cap≤5pF: < 300mΩ</td><td>1pF<Cap≤10pF: < 250mΩ</td></tr> <tr> <td>5pF<Cap≤100pF: < 250mΩ</td><td>10pF<Cap≤220pF: < 200mΩ</td></tr> <tr> <td rowspan="3">0505</td><td>0.4pF≤Cap<1.0pF: < 1500mΩ</td><td rowspan="3">0805</td><td>0.3pF≤Cap≤1pF: < 1500mΩ</td></tr> <tr> <td>1.0pF≤Cap<10pF: < 250mΩ</td><td>1pF<Cap≤10pF: < 250mΩ</td></tr> <tr> <td>10pF≤Cap≤100pF: < 200mΩ</td><td>Cap>10pF: < 200mΩ</td></tr> </table>	01005	0.2pF≤Cap≤1pF: < 700mΩ/pF	0201	0.1pF≤Cap≤1pF: < 350mΩ/pF	1pF<Cap≤2pF: < 600mΩ		2pF<Cap≤5pF: < 500mΩ	1pF<Cap≤5pF: < 300mΩ	5pF<Cap≤10pF: < 300mΩ		10pF<Cap≤22pF: < 350mΩ	5pF<Cap≤22pF: < 250mΩ	0402	0.1pF≤Cap≤1pF: < 350mΩ/pF	0603	0.1pF≤Cap≤1pF: < 1500mΩ	1pF<Cap≤5pF: < 300mΩ	1pF<Cap≤10pF: < 250mΩ	5pF<Cap≤100pF: < 250mΩ	10pF<Cap≤220pF: < 200mΩ	0505	0.4pF≤Cap<1.0pF: < 1500mΩ	0805	0.3pF≤Cap≤1pF: < 1500mΩ	1.0pF≤Cap<10pF: < 250mΩ	1pF<Cap≤10pF: < 250mΩ	10pF≤Cap≤100pF: < 200mΩ	Cap>10pF: < 200mΩ
01005	0.2pF≤Cap≤1pF: < 700mΩ/pF	0201	0.1pF≤Cap≤1pF: < 350mΩ/pF																												
	1pF<Cap≤2pF: < 600mΩ																														
	2pF<Cap≤5pF: < 500mΩ		1pF<Cap≤5pF: < 300mΩ																												
	5pF<Cap≤10pF: < 300mΩ																														
	10pF<Cap≤22pF: < 350mΩ		5pF<Cap≤22pF: < 250mΩ																												
0402	0.1pF≤Cap≤1pF: < 350mΩ/pF	0603	0.1pF≤Cap≤1pF: < 1500mΩ																												
	1pF<Cap≤5pF: < 300mΩ		1pF<Cap≤10pF: < 250mΩ																												
	5pF<Cap≤100pF: < 250mΩ		10pF<Cap≤220pF: < 200mΩ																												
0505	0.4pF≤Cap<1.0pF: < 1500mΩ	0805	0.3pF≤Cap≤1pF: < 1500mΩ																												
	1.0pF≤Cap<10pF: < 250mΩ		1pF<Cap≤10pF: < 250mΩ																												
	10pF≤Cap≤100pF: < 200mΩ		Cap>10pF: < 200mΩ																												
		The ESR should be measured at room temperature and tested at 500±50 MHz.	0201, 22pF≤Cap≤33pF: < 300mΩ 1111, 100pF<Cap≤1000pF: < 150mΩ																												

"Room Temperature" or "RT" equivalent to 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.


Packaging Dimensions & Part Count

Size	Carrier Tape Dimensions (mm)						
	01005	0201	0402	505	603	805	1111
A0	0.25 ±0.05	0.40 ±0.10	0.70 ±0.20	<1.90	1.05 ±0.30	1.50 ±0.20	<3.05
B0	0.45 ±0.05	0.70 ±0.10	1.20 ±0.20	<1.90	1.80 ±0.30	2.30 ±0.20	<3.80
T	≤ 0.50	≤ 0.55	≤ 0.80	0.23 ±0.10	≤ 1.20	≤ 1.20	0.23 ±0.10
K0	N/A	N/A	N/A	<1.50	N/A	N/A	< 2.50
W	8.00 ±0.30	8.00 ±0.30	8.00 ±0.30	8.00 ±0.30	8.00 ±0.30	8.00 ±0.30	8.00 ±0.30
P0	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10
10xP0	40.00 ±0.1	40.00 ±0.1	40.00 ±0.1	40.00 ±0.1	40.00 ±0.1	40.00 ±0.1	40.00 ±0.1
P1	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10
P2	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05
D0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0
D1	N/A	N/A	N/A	1.00 ±0.10	N/A	N/A	1.00 ±0.10
E	1.75 ±0.10	1.75 ±0.10	1.75 ±0.10	1.75 ±0.10	1.75 ±0.10	1.75 ±0.10	1.75 ±0.10
F	"3.30 ±0.05"	"3.30 ±0.05"	"3.30 ±0.05"	"3.30 ±0.05"	"3.30 ±0.05"	"3.30 ±0.05"	"3.30 ±0.05"


Paper Tape Dimensions

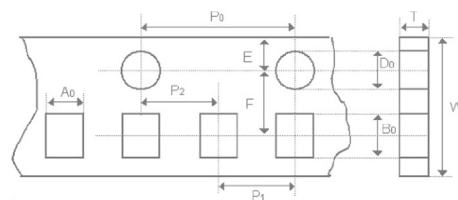

Plastic Tape Dimensions

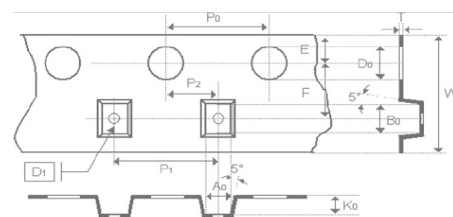

Reel Dimensions



Size	Thickness (mm)	Type	7" Reel	13" Reel
01005	0.20±0.02	Paper	20,000	-
0201	0.30±0.03		15,000	70,000
0402	0.50±0.05		10,000	50,000
0603	0.80±0.07		4,000	15,000
	0.50±0.10		4,000	-
0805	0.60±0.10		4,000	15,000
	0.85±0.10		4,000	15,000
0505	1.15±0.15	Plastic	3,000	-
1111	≤ 1.78		2,000	-

Reel Size	01001, 0201, 0402, 0505, 0603, 0805, 1111	
	7" Reel	13" Reel
C	13.0±0.5	13.0±0.5
W ₁	10.0±1.5	10.0±1.5
A	178.0±2.0	330.0±2.0
N	60.0+1.0/-0.0	50.0 min

Storage & Handling Conditions

- Parts should be stored in their original packing where possible. Temperature should be between 5°C and 40°C. Relative humidity maintained between 20% to 70%
- Do not store in the presence of salts, hydrogen sulfide, sulfur dioxide, chloride gas, ammonia or other acid and alkali.
- It is recommended that the product be used within one year of receipt. Check solderability in case shelf-life extension is needed.


Soldering Conditions

Termination material is suitable for Pb-free soldering and high-Pb containing solder. Reflow and Wave solder profiles for SAC305 alloy are suggest below. The use of N₂ may be required to aide in solderability especially for higher temperature solder compositions. Case sizes ≤ 0402, 0505 and, 1111 should only be attached using reflow soldering.

Vapour phase soldering can expose parts to similar stresses to those experienced during wave reflow and similar pre-heat and cool down conditions should be considered.

Hand soldering and re-work using a soldering iron can expose the capacitors to very high temperature deltas increasing the risk to cracking of the ceramic body. If use of soldering iron can not be avoided, a fine tip iron not exceeding 30 watts should be used. Parts should be pre-heated carefully and the soldering iron tip must NOT touch the capacitor.

Recommended reflow profile for SAC305 (Sn/Ag/Cu alloy) solder pastes.

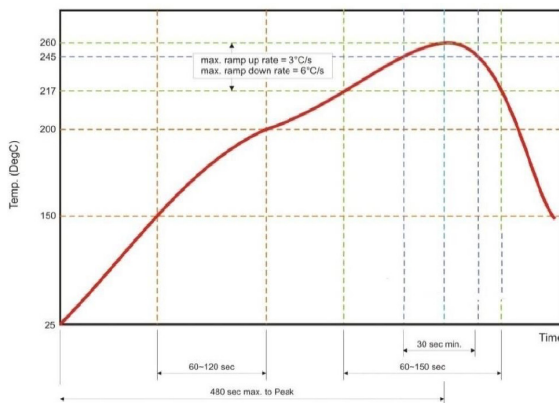

Recommended wave profile for SAC305 (Sn/Ag/Cu alloy) solder pastes.

