


Angstor® Capacitor
Metallized Polyester Dielectric

RA11

Stacked Metallized
Polyester Capacitor
With -55°C to +125°C
operating temperature range

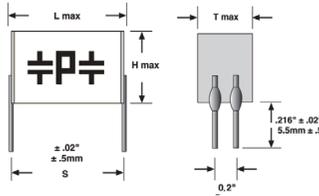

NEW

- High voltage ratings
- High ripple current ratings
- High capacitance density
- Ultra-low ESR/ESL
- Lightweight <25% of equivalent MLCC
- Low losses at high frequency
- Self-healing
- Rugged construction
- Made in U.S.A.

1200 VDC/630 VAC

PF Code	Value μF	L Max	T Max	H Max	S \pm .02 [5]	Lead Diameter	Typical ESR 500kHz m Ω	Max Ripple current 85C 500kHz [ARMS]	Lead Configuration	Part No.
474	0,47	1.15 [29.2]	0.53 [13.5]	1.05 [26.7]	1.1 [27.5]	0.032 [0.8]	33	14,2	4 pin DIP	474K1200RA11_

1000 VDC/500 VAC

804	0,8	1.15 [29.2]	0.35 [8.9]	1.05 [26.7]	1.1 [27.5]	0.32 [0.8]	28	5,8	4 pin DIP	804K1000RA11_
-----	-----	-------------	------------	-------------	------------	------------	----	-----	-----------	---------------

Dimensions in inches, metric (mm) in parenthesis
Tolerance: K (\pm 10%) standard, J (\pm 5%) available
RoHS part number information

No suffix indicates RoHS-5 compliant standard part number, RoHS-5 product does not contain five of the RoHS banned materials (Hg, CrVI, Cd, PBB and PBDE) in levels exceeding the industry defined limits. Component lead wires are plated with Sn / Pb and match conventional SnPb 1 assembly requirements
For a RoHS-6 compliant part, add a -FA suffix. RoHS-6 product does not contain any of the six RoHS banned materials (Hg, CrVI, Cd, PBB, PBDE and Pb) in levels exceeding the industry defined limits. Component lead wires are plated with Sn.


Electrical	Performance	Physical
<p>Tolerance: Available in \pm 5%, 10% (standard), 20%</p> <p>Voltage Range: 1000, 1200 VDC</p> <p>Dissipation Factor: \leq1.0 % @ 25°C, 1KHz</p> <p>Insulation Resistance: 1000ΩF or 100GΩ, whichever is less at rated voltage and 25°C</p> <p>Dielectric Strength: 1.3 x RVDC, 2 seconds max.</p> <p>Self Inductance: 2nh to 6nh typical</p> <p>Temperature Range: -55°C to 125°C operating -55°C to 85°C @ rated DC voltage derate voltage 1.25% / °C above 85°C max operating temperature; 125°C</p>	<p>Accelerated DC Voltage Life Test: 1,000 Hours, 85°C, 1.25 x Rated VDC Δ C/C \leq 5% DF \leq 1.0%, 1KHz, 25°C IR \geq 1,000 Megohm x μF Need not exceed 1,000 Megohms</p> <p>Moisture Test: 85°C / 85% RH / 21 days Applied Voltage: zero bias Δ C/C \leq 7% DF \leq 1.0%, 1KHz, 25°C IR \geq 30% of initial limit</p> <p>Long Term Stability: After 2 years storage, standard environment Δ C/C \leq 2%</p>	<p>Vibration: Mil Std 202 Method 204D</p> <p>Solder Resistance: 260°C, 5 Sec. Δ C/C \leq 2%</p> <p>Construction: Non-inductively constructed with metallized polyester dielectric (polyethylene terephthalate). Parallel plate–multilayer polymer (MLP) design.</p> <p>Electrode: Aluminum metallization</p> <p>Case: Polyester tape wrap</p> <p>Marking: Parts are marked $\pm\text{P}\pm$ and pf code. Capacitance, tolerance and working voltage are printed on container.</p> <p>Packaging: Anti-static tube</p>

Angstor® Capacitor
Metallized Polyester Dielectric


RA11

Electrical Characteristics 1000 VDC and 1200 VDC Ratings


Impedance Vs Frequency

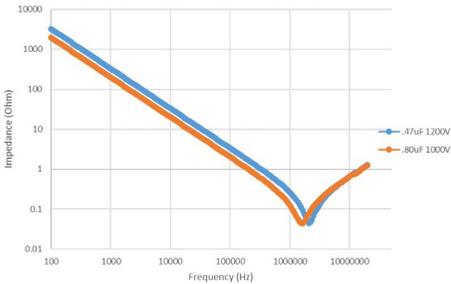


ESR Vs Frequency

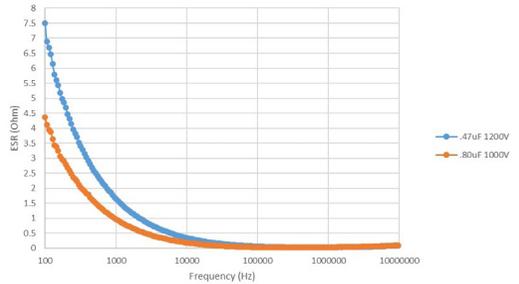

Ripple Current Limit Vs Frequency -55 to +85C

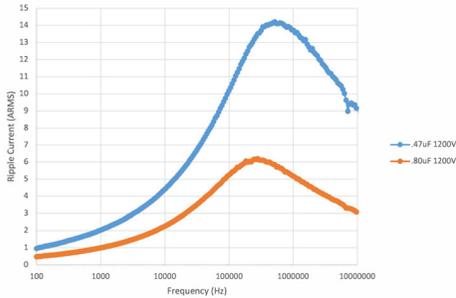

Maximum RMS Voltage Vs Frequency

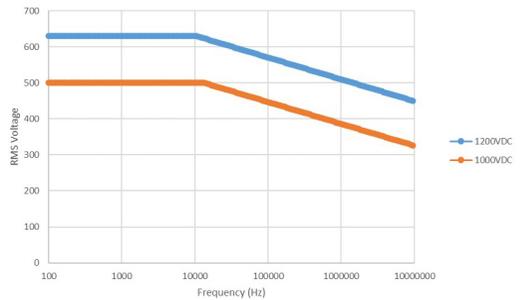


Test data is for 1200 VDC and 1000 VDC ratings only, and unless specified otherwise, all temperature and voltage tests were performed at 1kHz and all frequency tests performed at 25°C.

Angstor® Capacitor
Metallized Polyester Dielectric


RA11

Electrical Characteristics


Capacitance Change (%) Vs. Temperature

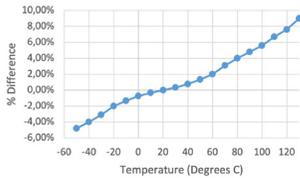


D.F. (%) Vs. AC Volts

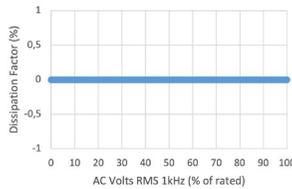


Capacitance Change (%) Vs. DC Bias Voltage

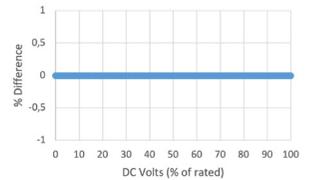


D.F. Vs. Temperature

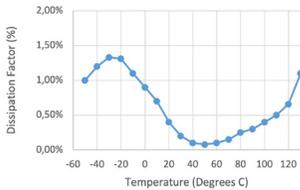


D.F. Vs. Frequency

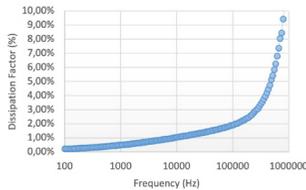


Capacitance (%) Vs. Frequency

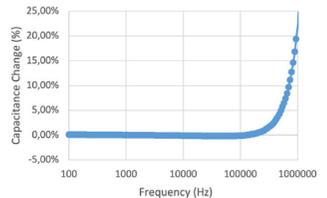

Phase Angle Vs. Frequency

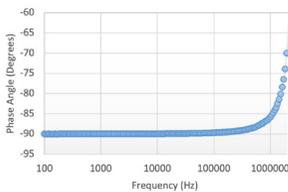

Capacitance Change (%) Vs. Time

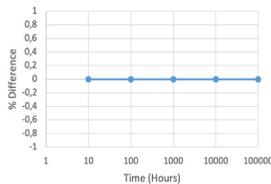

Test data is for 1200 VDC and 1000 VDC ratings only, and unless specified otherwise, all temperature and voltage tests were performed at 1 kHz and all frequency tests performed at 25°C.

Evans Trusted Brands. Single Source.
GROUP
PAKTRON **Hi-Rel Capacitors for Mission Critical Systems.**

Uniting four industry leaders—Evans, Paktron, UTC, and Eulex—Evans Group delivers the industry's most specialized and comprehensive capacitor portfolio. Together, we provide power-dense, high-reliability solutions engineered for mission-critical environments across defense, aerospace, energy, and advanced RF systems.

Paktron
1205 McConville Road Lynchburg, VA 24504

T +1 434.239.6941
E paktron@evans-group.com
URL www.evans-group.com/paktron