




DESCRIPTION:

PMI MODEL: LPF3R5-47-SFF IS A MICROSTRIP LOWPASS FILTER WITH SMA FEMALE CONNECTORS IN/ OUT. THIS UNIT OFFERS A HIGH Q AND LOW INSERTION LOSS.

ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	11/22/2019	

SPECIFICATIONS:

- FREQUENCY:..... DC TO 3.5 GHz
- INSERTION LOSS:..... 1.0 dB GOAL, 1.5 dB MAX
- VSWR:..... 1.5:1 GOAL, 1.8:1 MAX
- REJECTION @ 4-7 GHz:..... 50 dBc MIN
- IMPEDANCE:..... 50 Ω
- CONNECTORS:..... SMA FEMALE
- FINISH:..... PAINTED BLUE

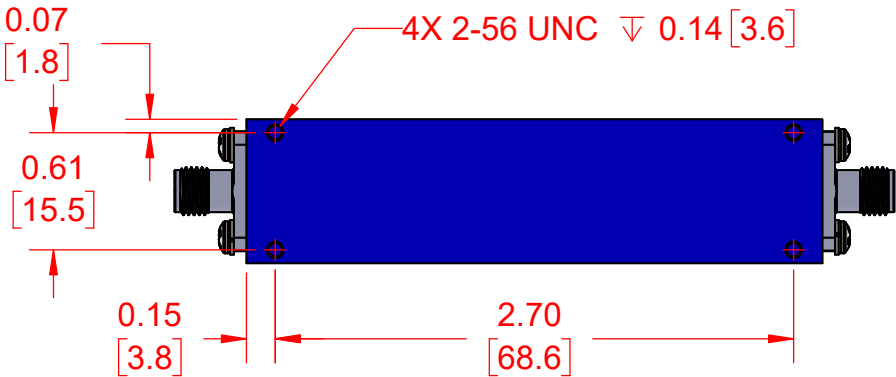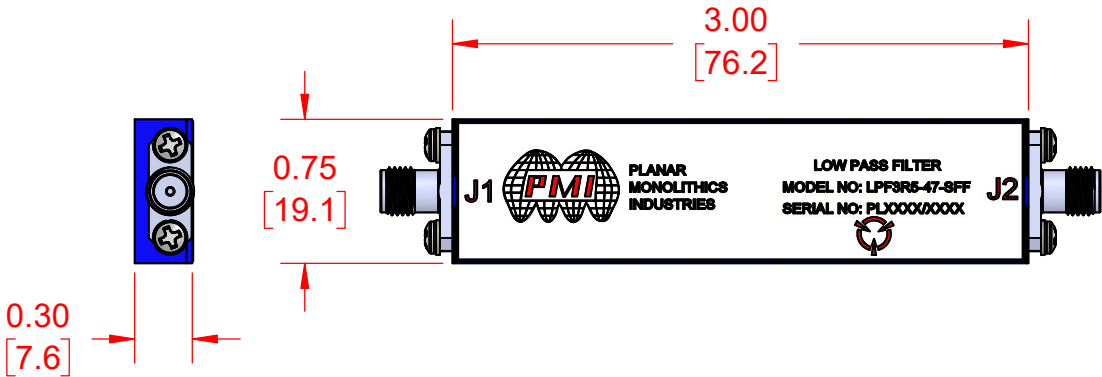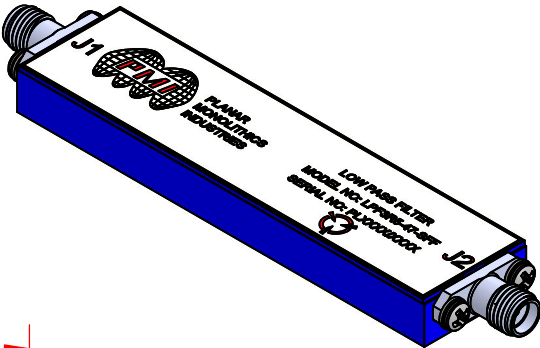

ENVIRONMENTAL RATINGS:


- TEMPERATURE:..... -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY:..... MIL-STD-202, METHOD 103B COND. B
- SHOCK:..... MIL-STD-202, METHOD 213B COND. B
- VIBRATION:..... MIL-STD-202, METHOD 204D COND. B
- ALTITUDE:..... MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE:..... MIL-STD-202, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ± 0.02 ±
 .XXX ± 0.01

APPROVALS		DATE
DRAWN	SPU	11/22/2019
REDRAWN		
ISSUED		

**PLANAR MONOLITHICS INDUSTRIES, INC.**

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED

TITLE
PRODUCT FEATURE
LPF3R5-47-SFF

SIZE	FSCM NO.	DWG NO.	REV.
B	05XQ0	27037800	A1

SCALE 2:1	SHEET 1 OF 1
-----------	--------------