



**SUMMARY TEST DATA  
ON  
P6T-2G20G-55-T-SFF**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: P6T-2G20G-55-T-SFF  
 Serial No: PL38230/2244

Tested By: S. O'Neill  
 Temperature: +25° C  
 Date: 10/25/2022  
 Drawing No: 27626103 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	2 GHz - 20 GHz	2 GHz - 20 GHz	PMI QA2	
2	Isolation	55 dB Min	63.4dB See Plot		
3	Insertion Loss	4.5 dB Max.	4.15dB See Plot		
4	Frequency Flatness	2 to 11 GHz (+1.0/-0.5 dB) 11 to 20 GHz (+2.0/-0.5 dB)	0.3dB / -0.5dB 1.3dB / -0.4dB See Plot		
5	VSWR: In/Out	2.0:1 Max	1.82:1 1.84:1 See Plot		
6	VSWR: Out/Off	2.0:1 Max	1.99:1 See Plot		
7	Input Power	+20 dBm Operational +27 dBm Survival	Pass See Typical Characteristics		
8	RF Switching Speed	Rise: 30 ns Max (10% to 90%) Fall: 30ns Max (90% to 10%)	Rise: 30 ns Max (10% to 90%) Fall: 30ns Max (90% to 10%)		
9	Video Leakage	<1.3V Max, 25ns Window	<1.3V Max, 25ns Window		
10	DC Voltage	+15 VDC @ 200 mA Max -5 VDC @ 100 mA Max	+15 VDC @ 41 mA -5 VDC @ 21 mA		
11	Control Signal	TTL Logic: "0" On, "1" Off	Pass		PMI QA2

QA/QC Approval: \_\_\_\_\_





PMI  
QA2

Date: 10/26/2022



# SUMMARY TEST DATA ON P6T-2G20G-55-T-SFF

PL38230/2244

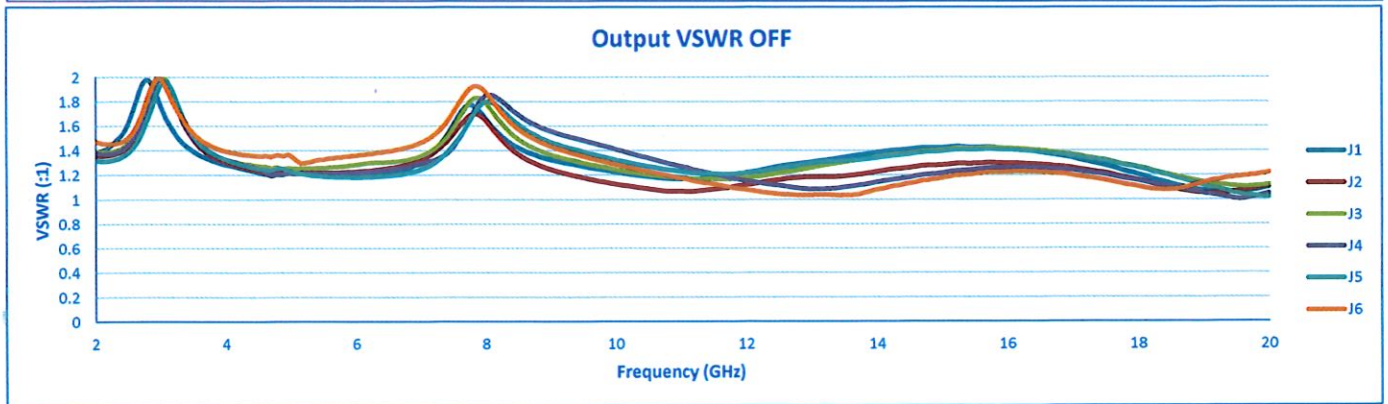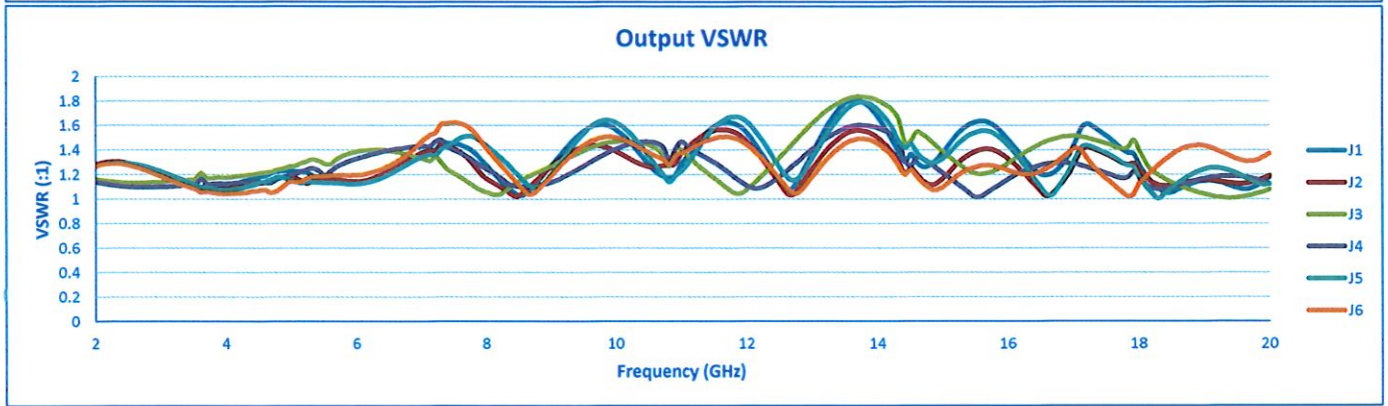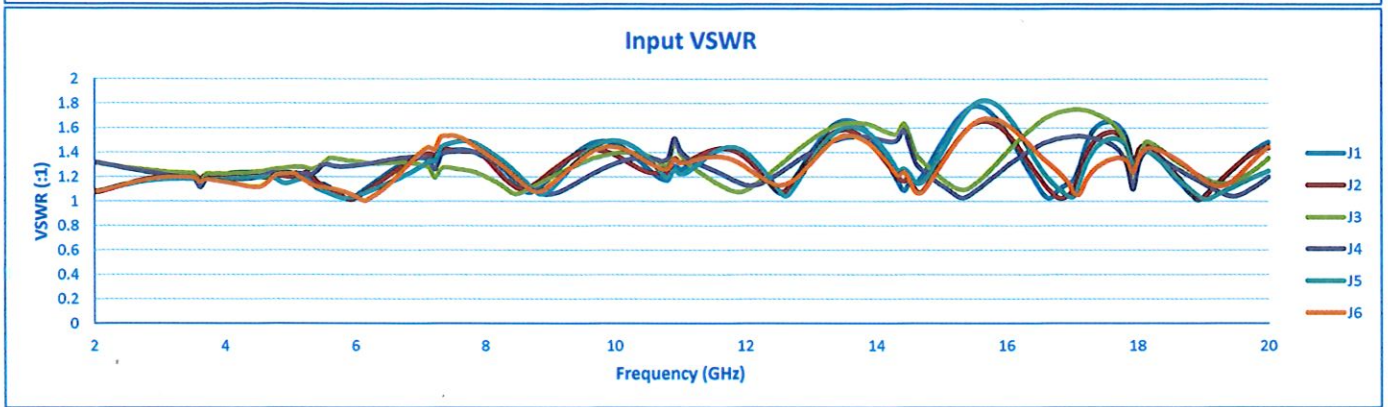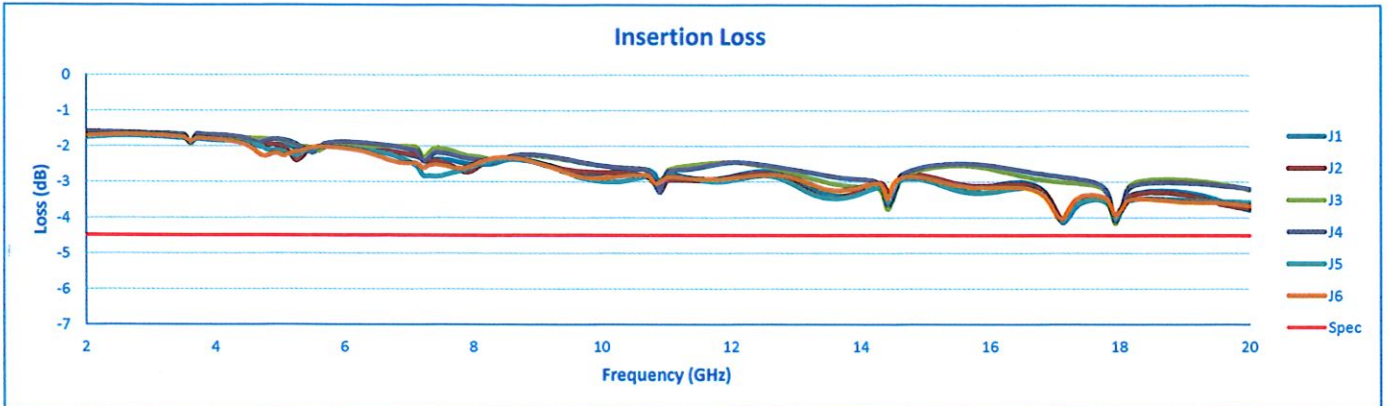



# SUMMARY TEST DATA ON P6T-2G20G-55-T-SFF

PL38230/2244

