


APTMP3-00200020-3523-D9-WB

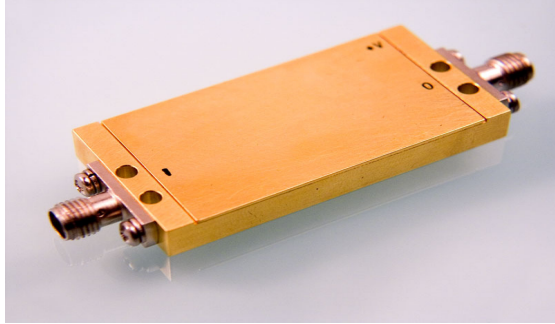

Features: (typical values)

- Very high IP₃.....+ 34 dBm
- High Gain..... +24.0 dB
- Low NF 4.0 dB
- Super Linearity

Specifications (Referenced to 50 ohms)

Parameter	Typical Value	Min. Value	Max. Value	Units
Frequency		20	2000	MHz.
Gain	24.0	22.0		dB.
Gain Flatness	±0.5		±1.0	dB.
Gain Var. over temp.	0.5			ΔdB.
Pout @ 1dB. Comp.	+23.0	+20.0		dBm.
NF 20-100mhz	4.0		5.0	dB.
NF 100-2000mhz	2.5		4.0	
Reverse Isolation	35.0			dB.
IP ₃ /IP ₂ (two-tone)	35/47	31/40		dBm.
HIP2 (2 nd harm.)	52.0			dBm.
VSWR In/Out	1.7:1		2.0:1	
Supply Req'd	+15/250		+15/270	V/mA.

Min. and max. values are from -40°C to +85°C

Maximum Ratings

Storage Temperature -62°C to +125°C
 DC Voltage +17 volts
 RF Input Power +13.0 dBm.
 Case Temperature +95°C

Typical Performance Curves

- ■ - -40°C ◆ - +25°C ▲ - +85°C

