

APTMP4-00010100-3026-D9


Features: (typical values)

- Wide Band10-1000 MHz.
- Noise Figure 3.0 dB.
- High Gain 42 dB.

Maximum Ratings

Storage Temperature -62°C to +125°C
 DC Voltage +17 volts
 RF Input Power +7.0 dBm.
 Case Temperature +100°C

10-1000 MHz Cascadable Amplifier

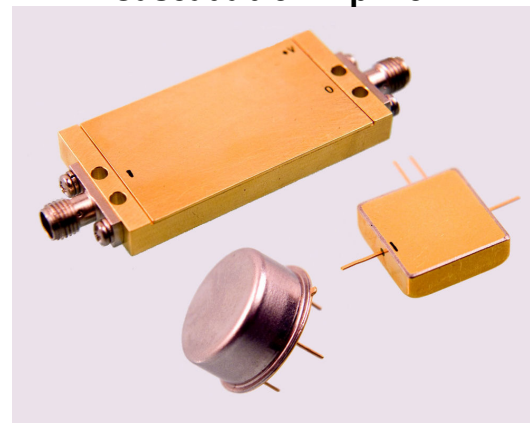

Specifications (Referenced to 50 ohms)

Parameter	Typical Conditions	Min Value	Max Value	Units
Frequency		10	1000	MHz.
Gain	42	40		dB.
Gain Flatness	±0.5		±1.0	dB.
Gain Var. over temp	0.6			ΔdB.
Pout @ 1dB Comp	+26	+25		dBm.
Noise Figure	3.0		4.5	dB.
Reverse Isolation	60			dB.
IP ₃ /IP ₂ (two-tone)*	40/47	37/40		dBm.
HIP2 (2 nd harm.)	55			dBm.
VSWR In/Out	1.7:1		2.0:1	
Supply Required	+15/550		+15/570	v/mA.

Min. and max. values are from -55°C to +85°C

*IP₃ and IP₂ are in band output intercept points

