

SUMMARY TEST DATA ON LM-6G18G-15-10W-SFF

Customer: _____
 SO No: _____
 Model No: LM-6G18G-15-10W-SFF
 Serial No: 13024
 Part No: _____

Tested By: John R
 Temperature: +25°C
 Date: 3/12/2021
 Drawing No: 27612832 REV: B1




| TEST. ITEM NO | PARAMETERS | SPECIFIED VALUE | Test Results | QA QC |
|---------------|----------------------------------|---|-------------------------------------|-------------|
| 1 | Frequency Range: | 6 GHz to 18 GHz | 6 GHz to 18 GHz | PMI QA 2 |
| 2 | Insertion Loss: @ 0 dBm Input | 2.5 dB Typical | 2.11 dB See Plot | |
| 3 | Input Power (CW): | 10 Watts Maximum | Pass See Typical Characteristics | |
| 4 | Input Power (Peak): | 100 Watts Maximum (@ 1 μ s Pulse Width, 0.1% Duty Cycle) | Pass See Typical Characteristics | |
| 5 | Leakage Power: | +15 dBm Typical | +12.4 dBm | |

QA/QC Approval:   PMI QA 2 Date: 3/13/21

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@pmi-rf.com

SUMMARY TEST DATA ON LM-6G18G-15-10W-SFF

13024

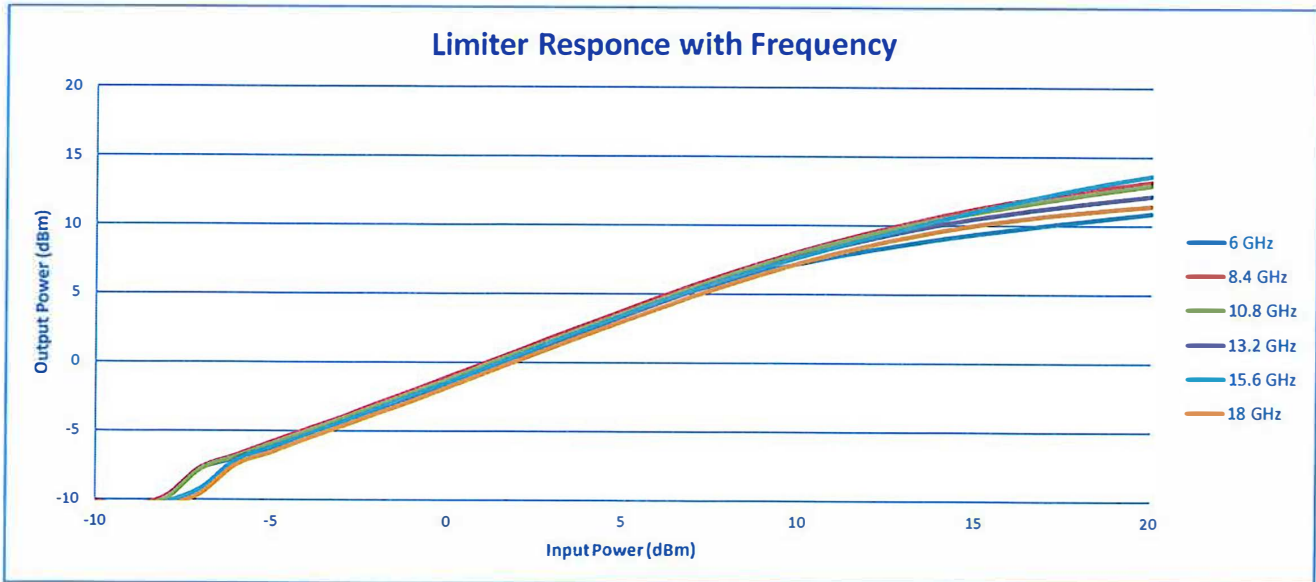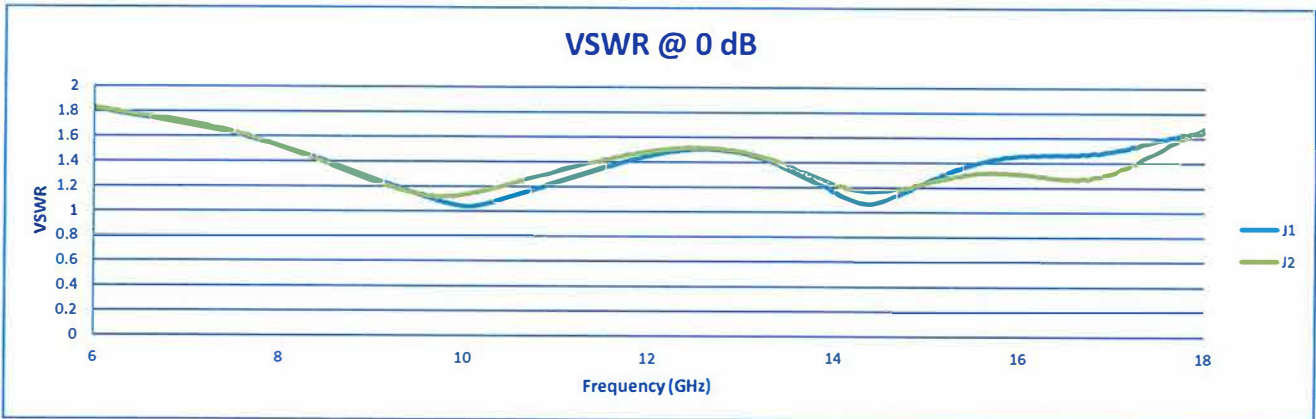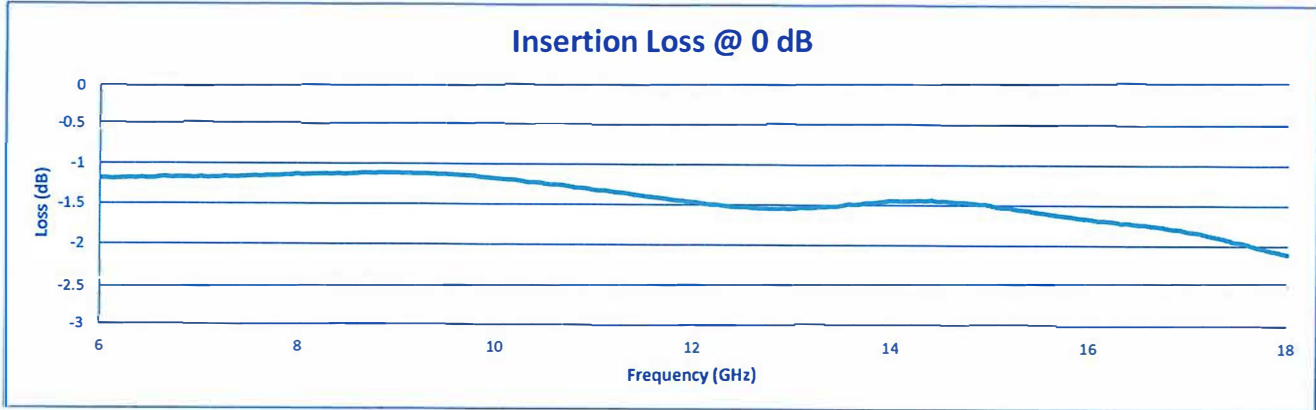

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com