



**SUMMARY TEST DATA
ON
PEC4-16-8G18G-4R7-18-15-SFF**

Customer: _____
SO No: _____
Model No: PEC4-16-8G18G-4R7-18-15-SFF
Serial Pair: PL24818/1906

Tested By: K. Mansfield
Temperature: +25°C
Date: 2/6/2019
Drawing No: 27628813 REV: B1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	8.0 to 18.0 GHz	8.0 to 18.0 GHz	PMI QA 1
2	Gain:	16 dB Max. 13 dB Min.	15.5 dB Max. 14 dB Min. See Plot	
3	Gain Flatness:	±1.5 dB Max.	1.02 dB -0.45 dB See Plot	
4	Noise Figure:	4.7 dB Max.	4.34 dB See Plot	
5	OP1dB:	+18 dBm Typ.	+20.8 dB See Plot	
6	VSWR: (Input/Output)	1.67:1 Max. Input 2.25:1 Max. Output	1.18:1 In 1.45:1 Out See Plot	
7	Maximum Input:	+30 dBm CW	Pass See Typical Characteristics	
8	DC Supply:	+12.5 to +28 VDC @ 250 mA Typ..	+12 VDC @ 212 mA	

QA/QC Approval: _____



PMI
QA 1

Date: 2/6/19



**SUMMARY TEST DATA
ON
PEC4-16-8G18G-4R7-18-15-SFF**

PL24818/1906

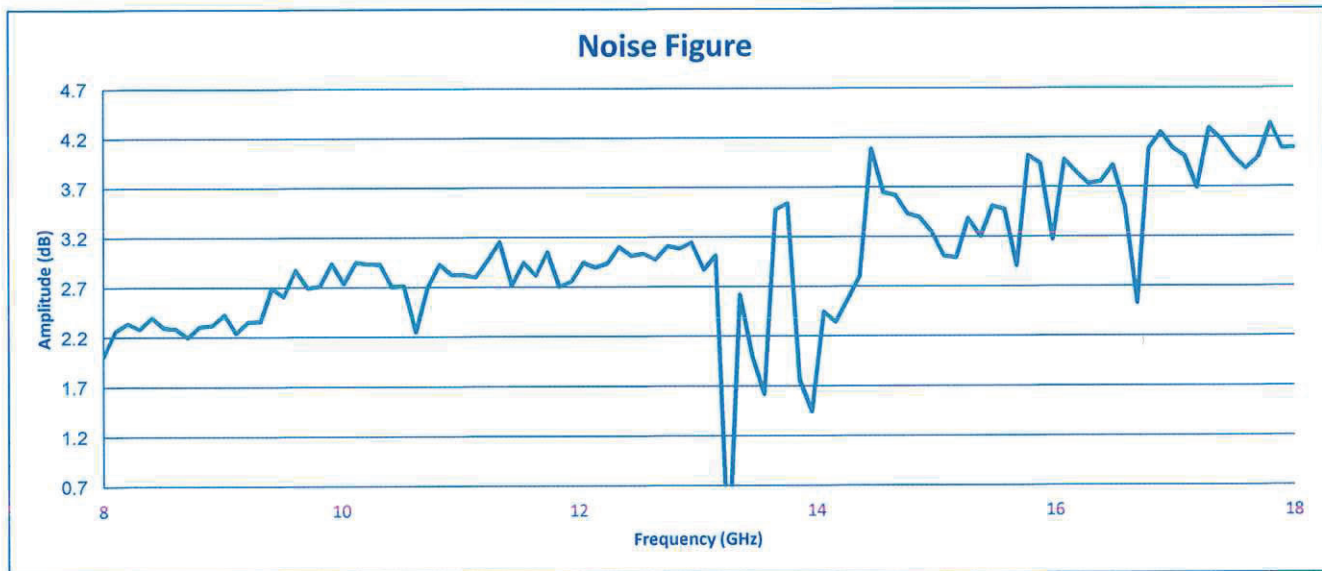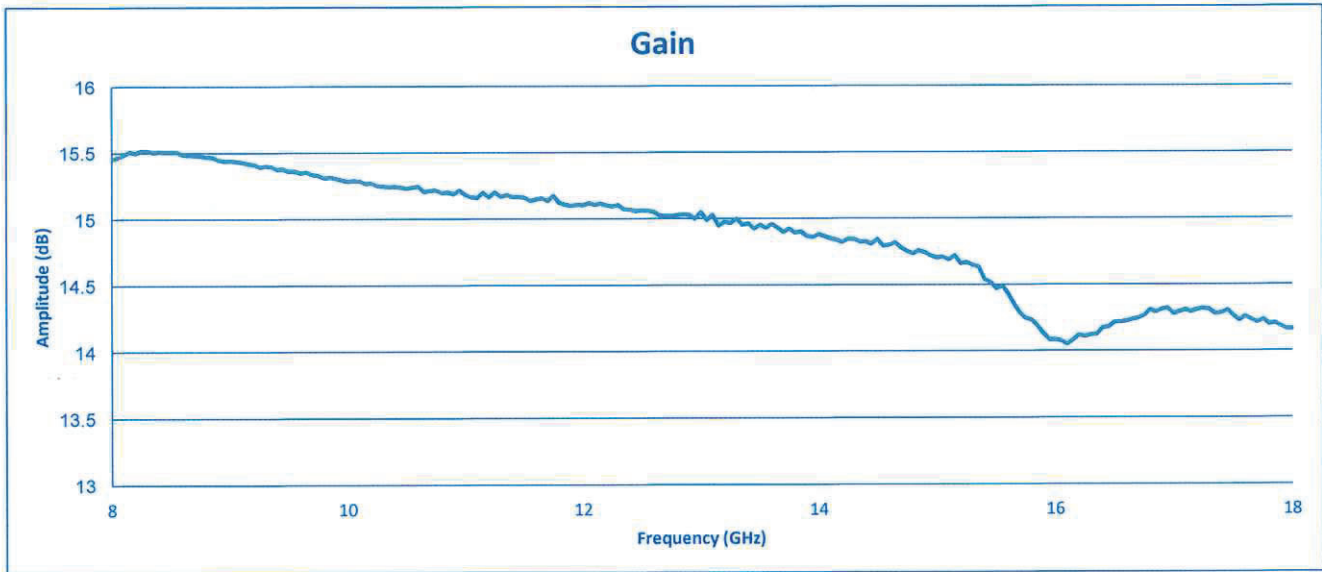



SUMMARY TEST DATA ON PEC4-16-8G18G-4R7-18-15-SFF

PL24818/1906

