



## SUMMARY TEST DATA ON PEC-36-2G18G-4R5-27-15-SFF

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: PEC-36-2G18G-4R5-27-15-SFF  
 Serial No: PL32772/2126

Tested By: EA Valdez  
 Temperature: +25°C  
 Date: 6/29/2021  
 Drawing No: 27624405      REV: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC	
1	Frequency Range:	2.0 to 18.0 GHz	2.0 to 18.0 GHz	PMI QA3	
2	Gain:	36 dB Typ.	+39.9 dB Max. +37.2 dB Min. See Plot		
3	Gain Flatness:	±1.5 dB Typ.	±1.35 dB Max. See Plot		
4	Noise Figure:	4.5 dB Typ. 5.0 dB Max.	3.4 dB Max. See Plot		
5	OP1dB:	+26.5 dBm Min. +27.5 dBm Typ.	+26.8 dBm Min. See Plot		
6	VSWR Input/Output:	2.0:1 Max.	1.73:1 In 1.83:1 Out See Plot		
7	Impedance:	50 Ohms	Pass		
8	Input Power:	+20 dBm Max.	Pass		
9	DC Supply:	+15 VDC @ 850 mA Nomial.	+12 to +15 VDC @ 743 mA		PMI QA3

QA/QC Approval: A Zimmerman


Date: 6/29/21



# SUMMARY TEST DATA ON PEC-36-2G18G-4R5-27-15-SFF

PL32772 2126

Gain and VSWR Plot

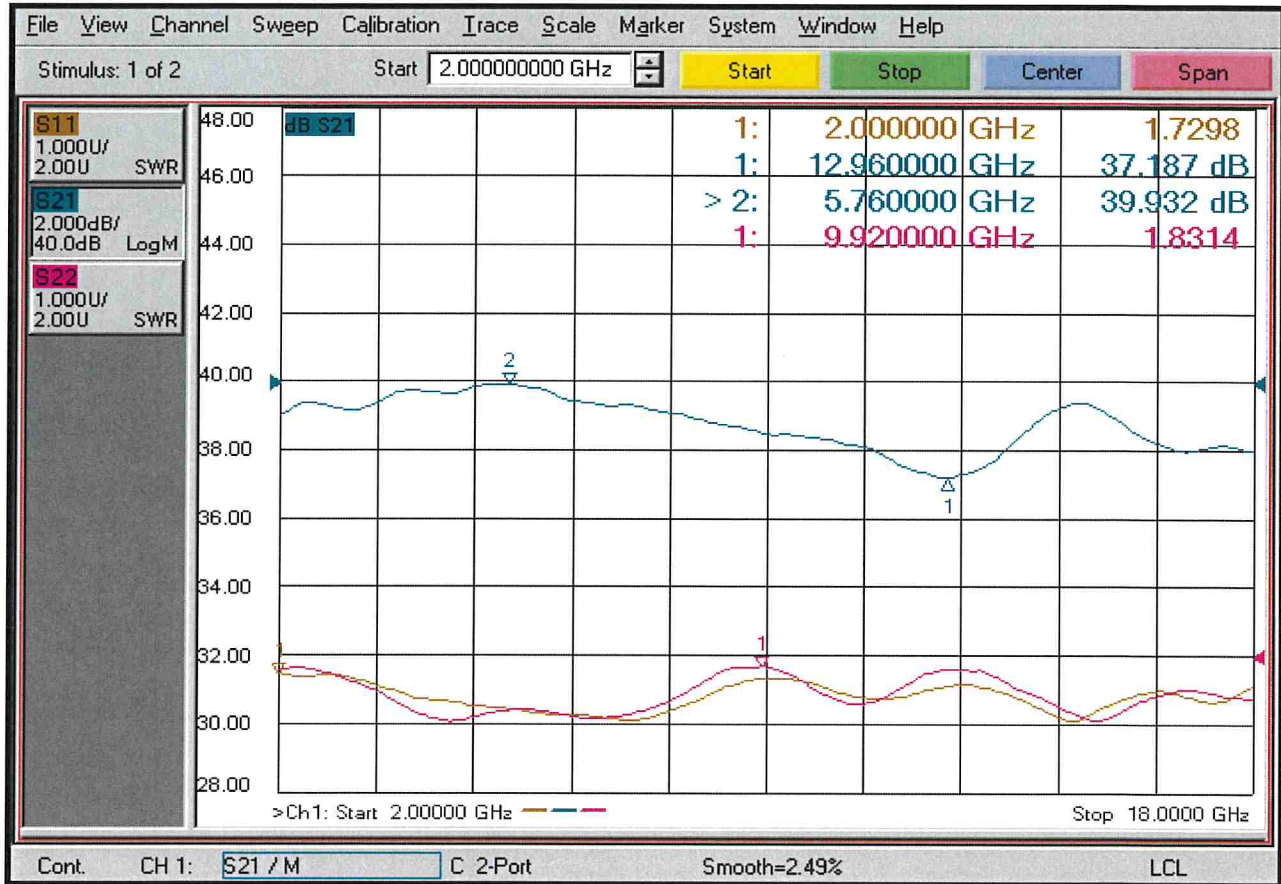




# SUMMARY TEST DATA ON PEC-36-2G18G-4R5-27-15-SFF

PL3272/2126

Noise Figure Plot

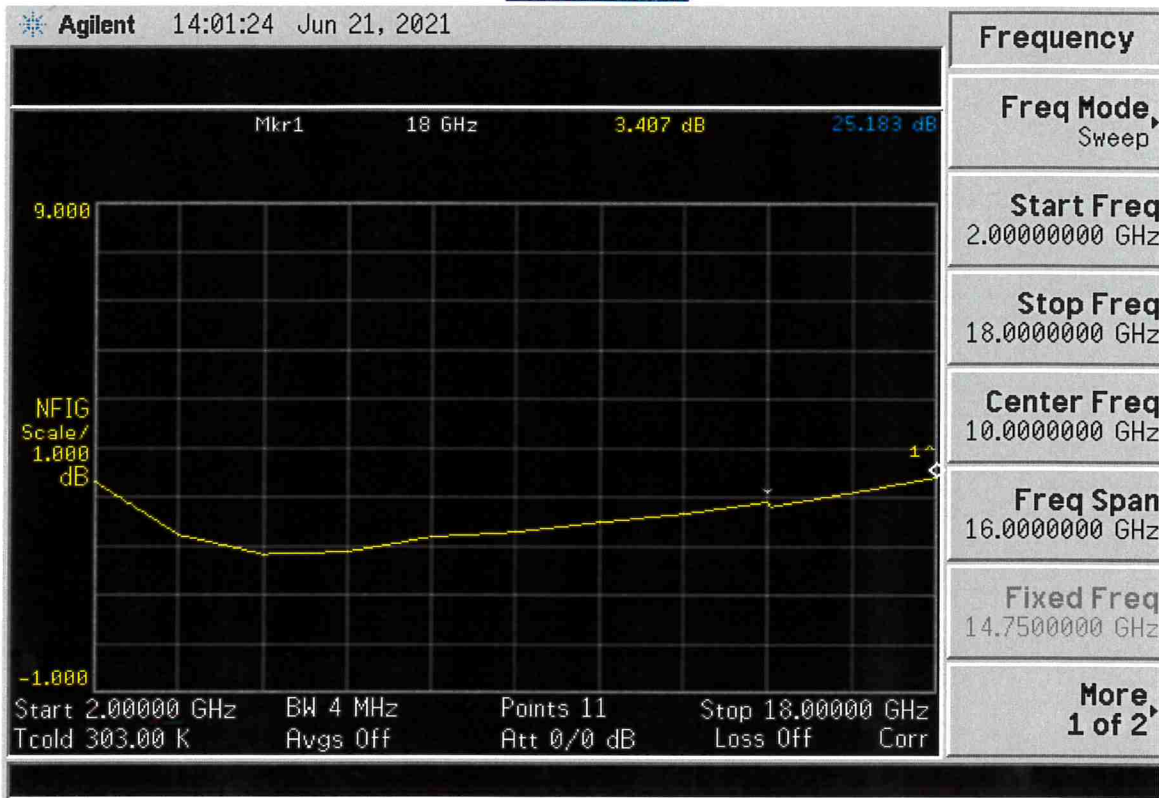

OP1dB Plot

P1dB Vs Frequency

