

SUMMARY TEST DATA ON P2T-8G18G-45-R-SFF-HIP20W

Customer: _____
SO No: _____
Model No: P2T-8G18G-45-R-SFF-HIP20W
Serial No: PL41469/2330

Tested By: Rony Castellanos
 Temperature: +25°C
 Date: 11/6/2023
 Drawing No: 27617997 Rev: B2

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	8.0 GHz to 18.0 GHz	8.0 GHz to 18.0 GHz	PMI QA2
2	Insertion Loss:	2.5 dB Max.	1.91 dB See Graph	
3	Isolation:	45 dB Min.	51 dB Min. See Graph	
4	VSWR:	2.0:1 Max.	1.69:1 In 1.77:1 Out See Graph	
5	Switching Speed:	Rise Time 75ns Typ.	Pass See Typical Characteristics	
		Fall Time 25ns Typ.		
		Delay On 150ns		
		Delay Off 100ns		
6	Operating Input Power:	20W CW Max. PRF 1 MHz Max.	Pass See Typical Characteristics	
7	Hot Switching:	10W CW Max.	Pass See Typical Characteristics	
8	DC Supply:	+5 VDC @ 200 mA -28 VDC @ 100 mA	+5 VDC @ 70 mA -28 VDC @ 2 mA	

Logic Table		
E1	J1-J2	J1-J3
0	On	Off
1	Off	On

QA/QC Approval:


PMI
QA2

Date:


11/6/2023

SUMMARY TEST DATA ON P2T-8G18G-45-R-SFF-HIP20W

Insertion Loss

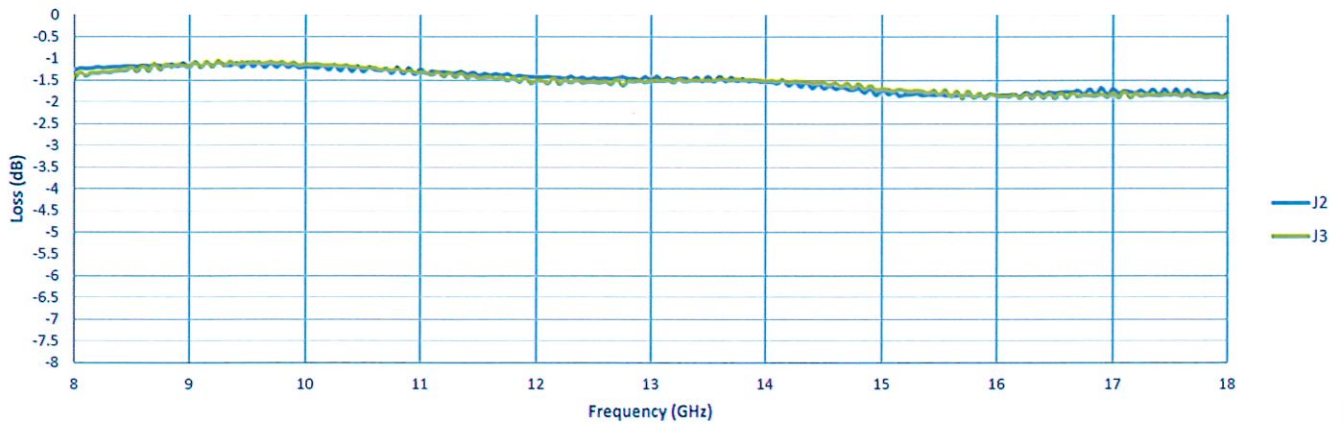

VSWR

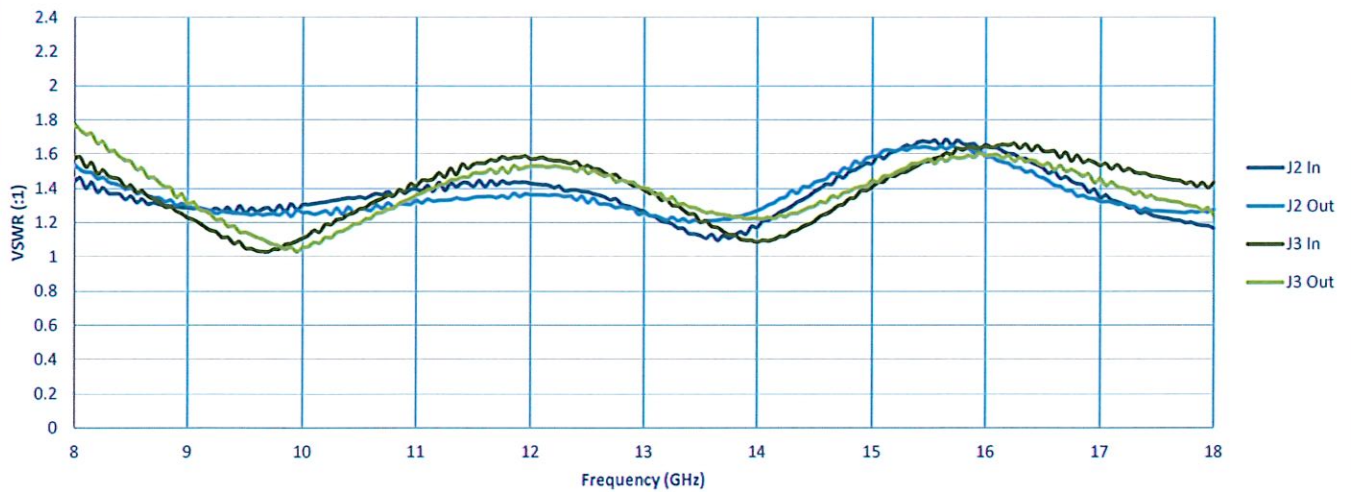

Isolation

