

**SUMMARY TEST DATA
ON
LM-2G18G-18-20W-1KWP-SFF**

Customer: _____
 SO No: _____
 Model No: LM-2G18G-18-20W-1KWP-SFF
 Serial No: PL46317/2422

Tested By: L. McGraw
 Date: 5/28/2024
 Drawing No: 27636740 REV: B1


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results			QA QC
			+25°C	-44°C	+78°C	
1	Frequency Range:	2.0 to 18.0 GHz	2.0 to 18.0 GHz	2.0 to 18.0 GHz	2.0 to 18.0 GHz	PMI QA4
2	RF Input Power:	20 Watts (+43 dBm) CW Maximum	Pass See Graph	Pass See Graph	Pass See Graph	
3	Peak Input Power:	100W (+50 dBm) Maximum @10% Duty Cycle & 40µs Pulse Width	Pass	Pass	Pass	
4	Limiting Threshold (P1dB):	≥ +5 dBm Minimum	8.0 dBm See Graph	9.0 dBm See Graph	6.0 dBm See Graph	
5	RF Leakage:	≤ +18 dBm Flat & Spike Maximum	15.4 dBm See Graph	15.2 dBm See Graph	14.7 dBm See Graph	
6	Recovery Time:	< 100 ns Maximum	24.4 ns	24.4 ns	24.4 ns	
7	Insertion Loss:	2.6 dB Maximum (@ -10 dBm Input Power)	1.7 dBm See Graph	1.7 dBm See Graph	1.8 dBm See Graph	
8	VSWR:	2.0:1 Maximum (Input/Output) (@ -10 dBm Input Power)	1.8 :1 See Graph	1.8 :1 See Graph	1.8 :1 See Graph	
9	Mechanical Outline	See Outline Drawing Pass / Fail	Pass	Pass	Pass	
10	Weight:	< 3.0 OZ	Pass	Pass	Pass	
11	Seal	See Attached Seal Data Pass / Fail FINE LEAK: 1 X 10 ⁻⁶ ATM-cc/sec	Pass	Pass	Pass	PMI QA4

QA/QC Approval: *Cameron Kelley*


Date: 5/28/24

SUMMARY TEST DATA ON LM-2G18G-18-20W-1KWP-SFF


Insertion Loss

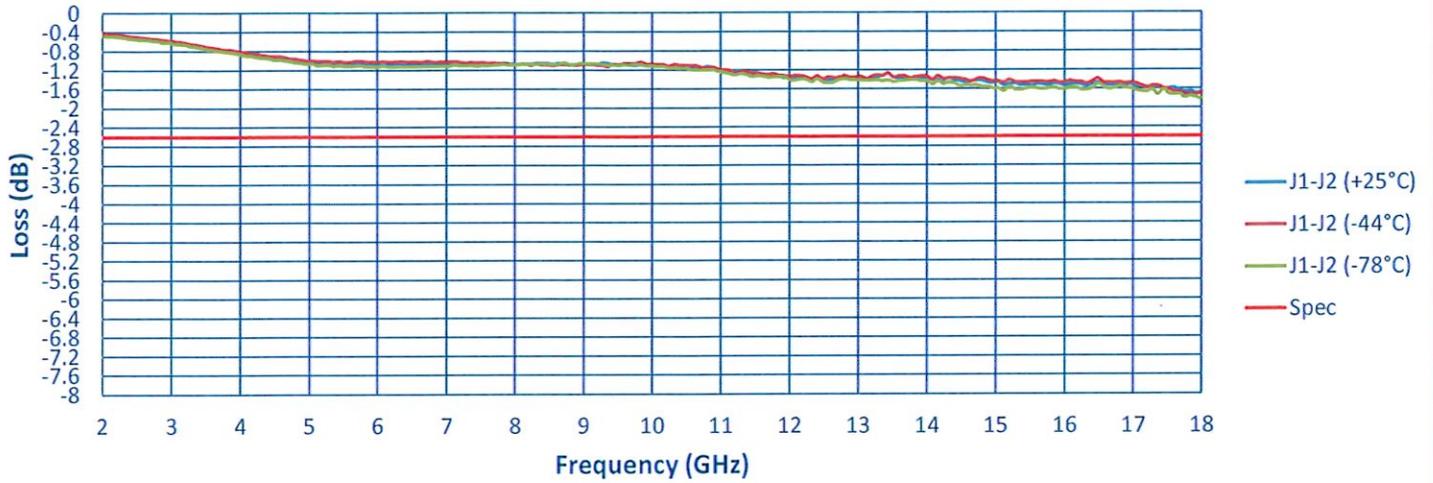

VSWR

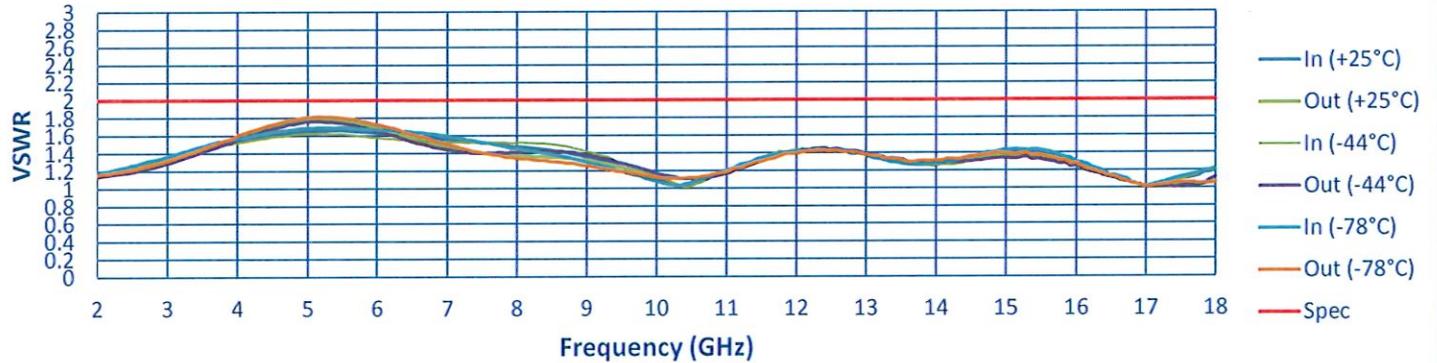


High Power Test @ 8GHz

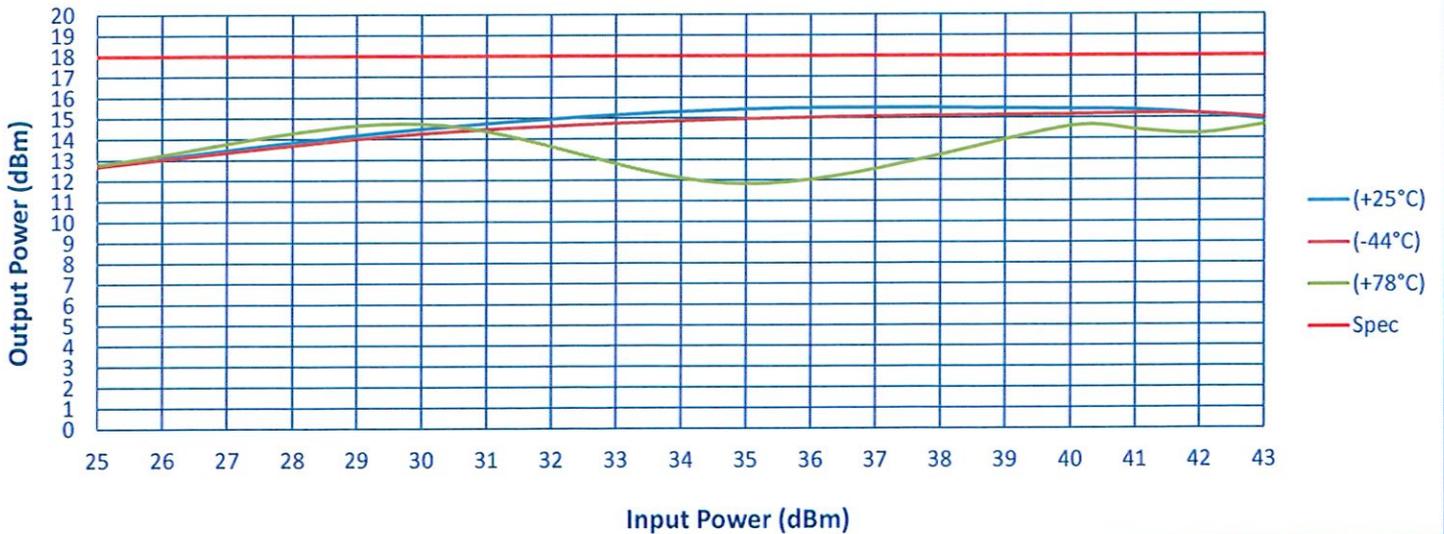


SUMMARY TEST DATA ON LM-2G18G-18-20W-1KWP-SFF


Limiting @ +25°C

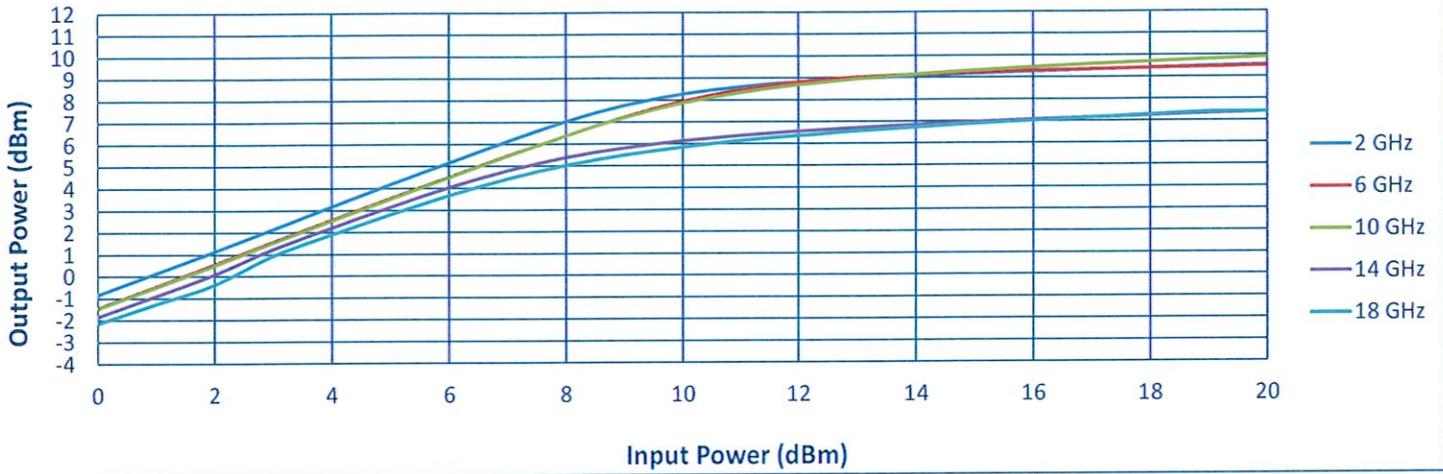

Limiting @ -44°C

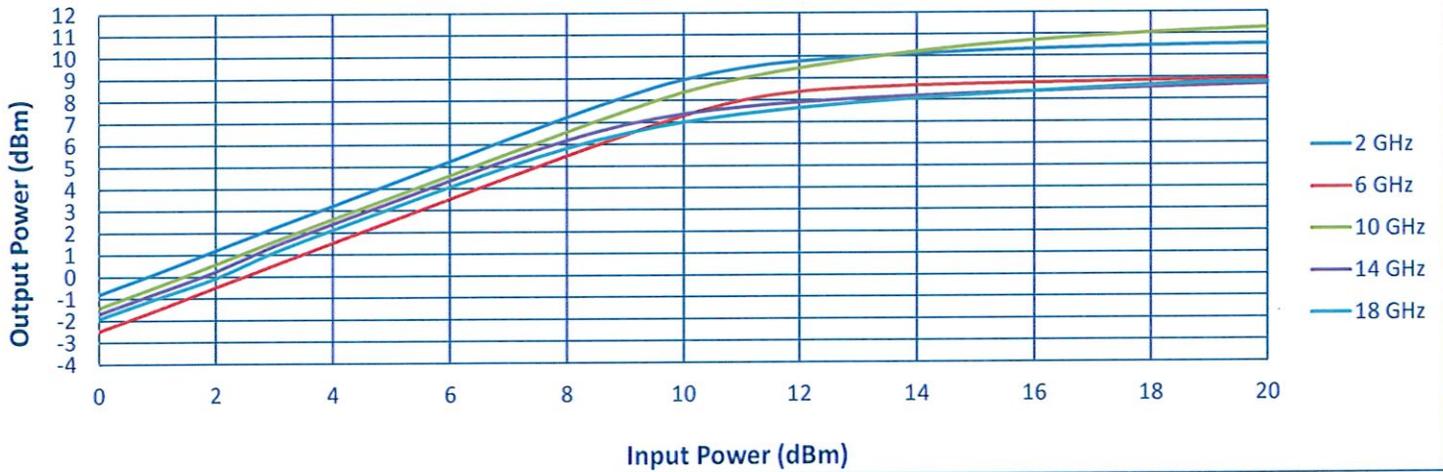


Limiting @ +78°C

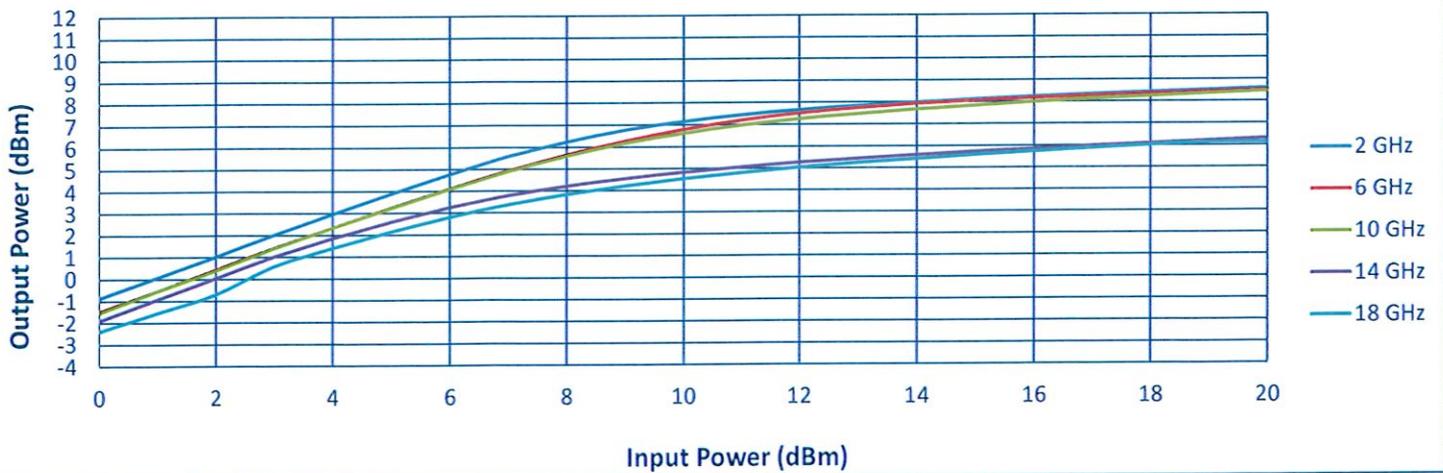

SUMMARY TEST DATA ON LM-2G18G-18-20W-1KWP-SFF

Recovery Time

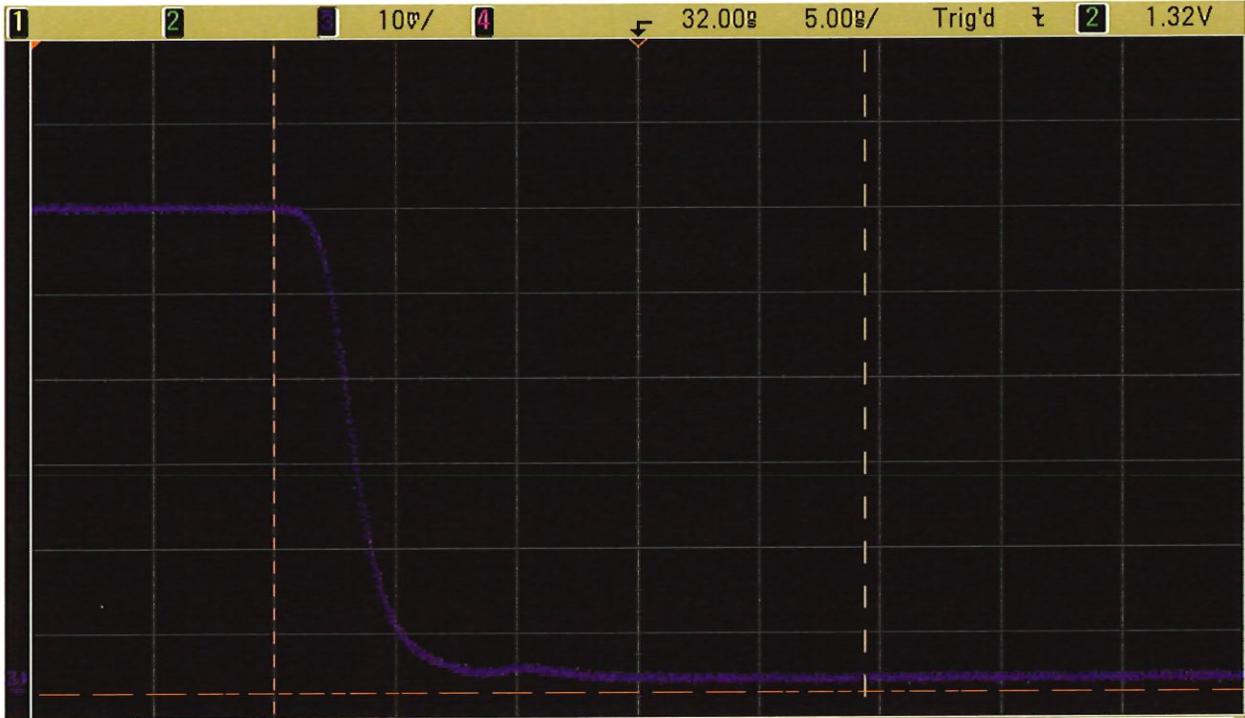

Full Pulse

