



**SUMMARY TEST DATA
ON
BPF-9D05G9D49G-SFF**

Customer: _____
 SO: _____
 Model No: BPF-9D05G9D49G-SFF
 Serial No: PL58090/2608

Tested By: A Karoly
 Temperature: 25°C
 Date: 2/18/2026
 Drawing No: 27653840 Rev: A1



TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Passband Frequency	9.05 GHz TO 9.49 GHz	9.05 GHz TO 9.49 GHz	
2	Insertion Loss	1 dB MAX	0.57 dB (See Graph)	
3	Passband Ripple	0.6 dB MAX	±0.07 dB (See Graph)	
4	VSWR	1.5:1 MAX	1.2:1 (See Graph)	
5	Rejection @ 8.65-8.865 GHz	25 dB MIN	31.7 dB (See Graph)	
6	Group Delay	2 ns MAX	1.31 ns (See Graph)	



*FOR ALL OTHER SPECIFICATIONS, SEE TYPICAL CHARACTERISTICS ON THE PMI WEBSITE

QA/AC Approval: _____

Date: _____

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@pmi-rf.com

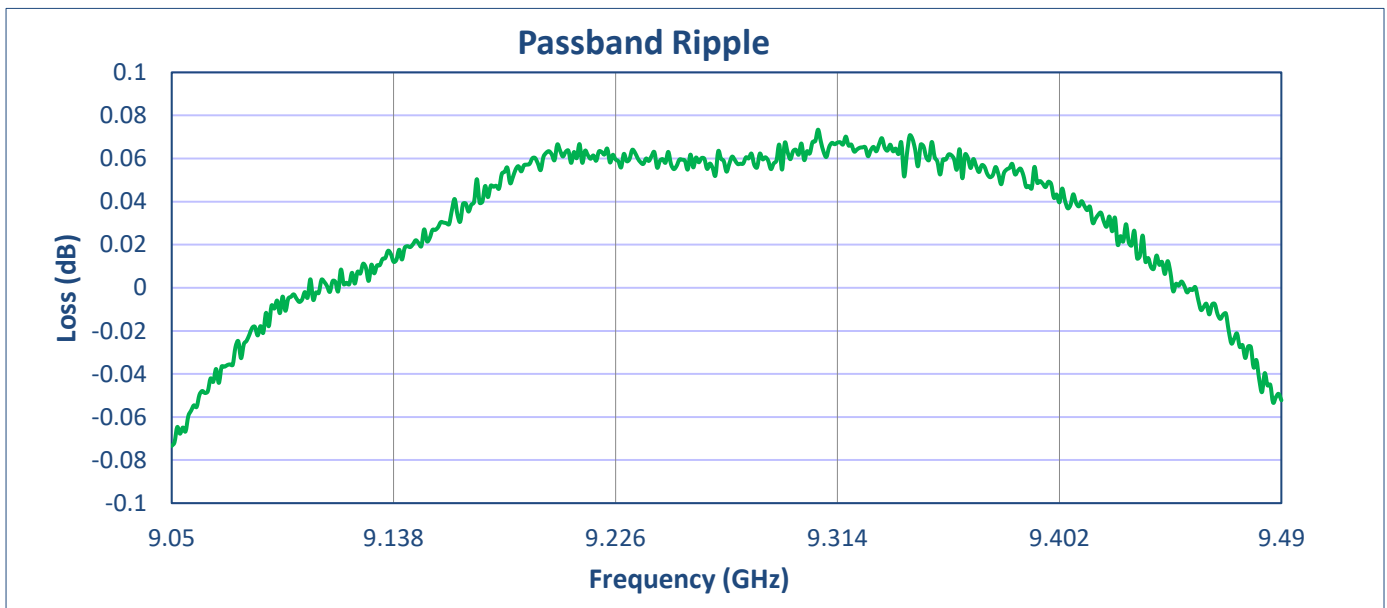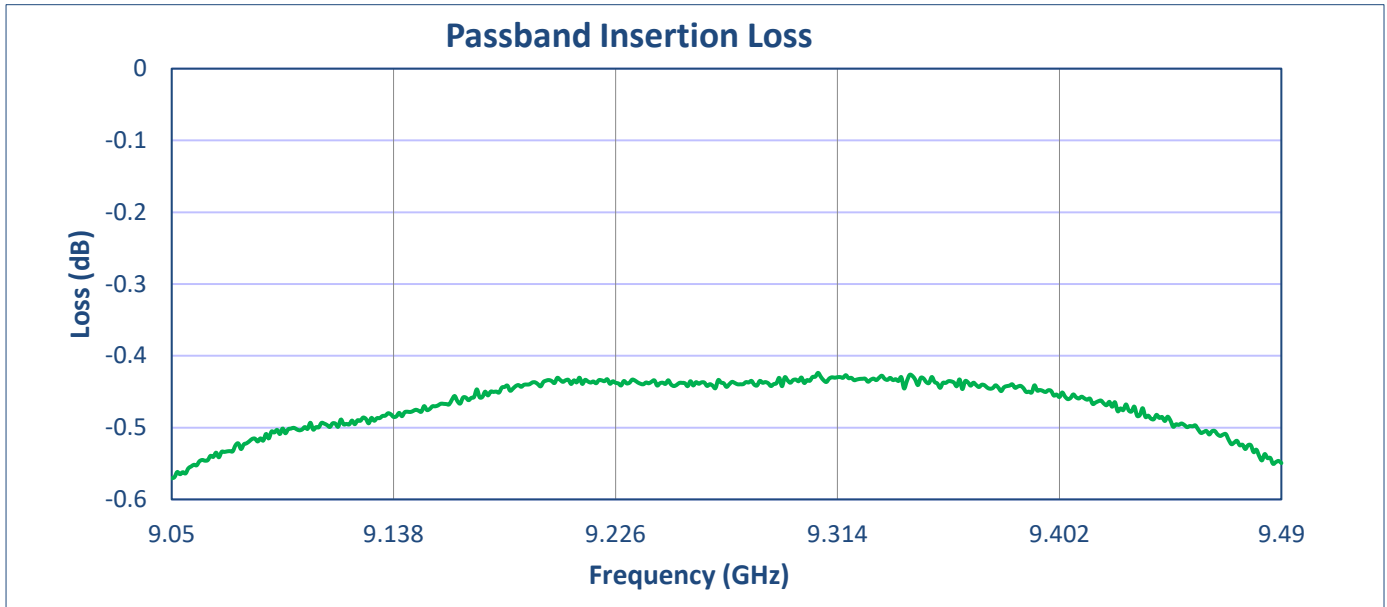

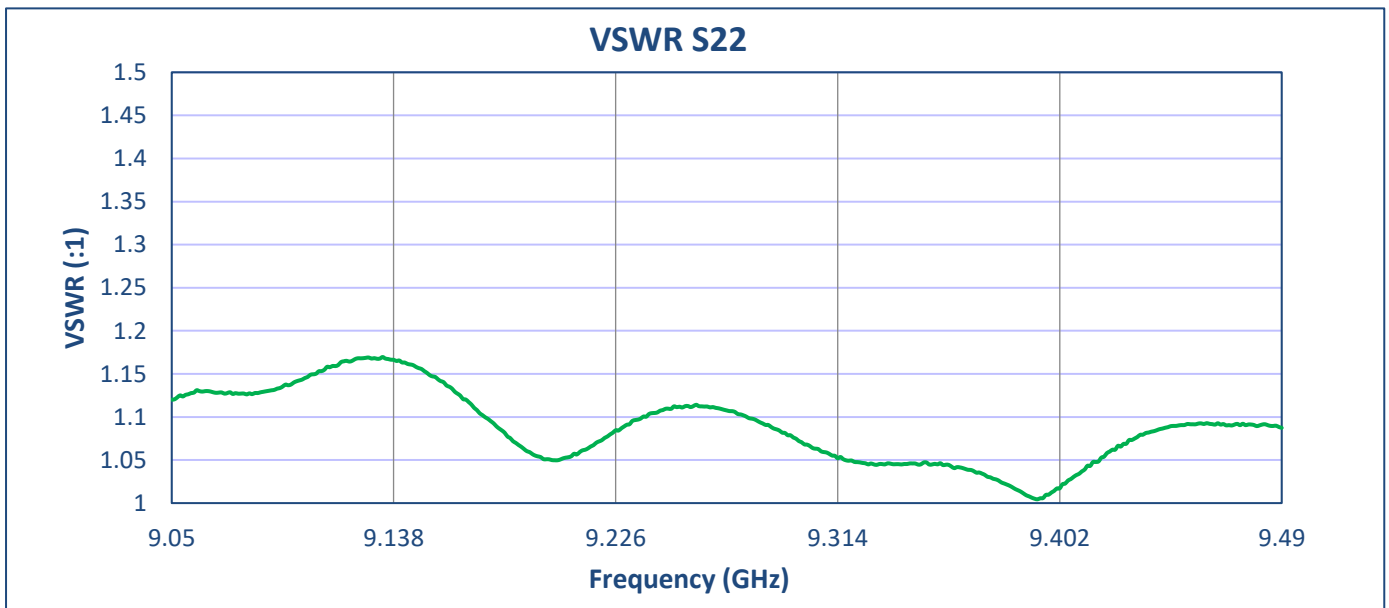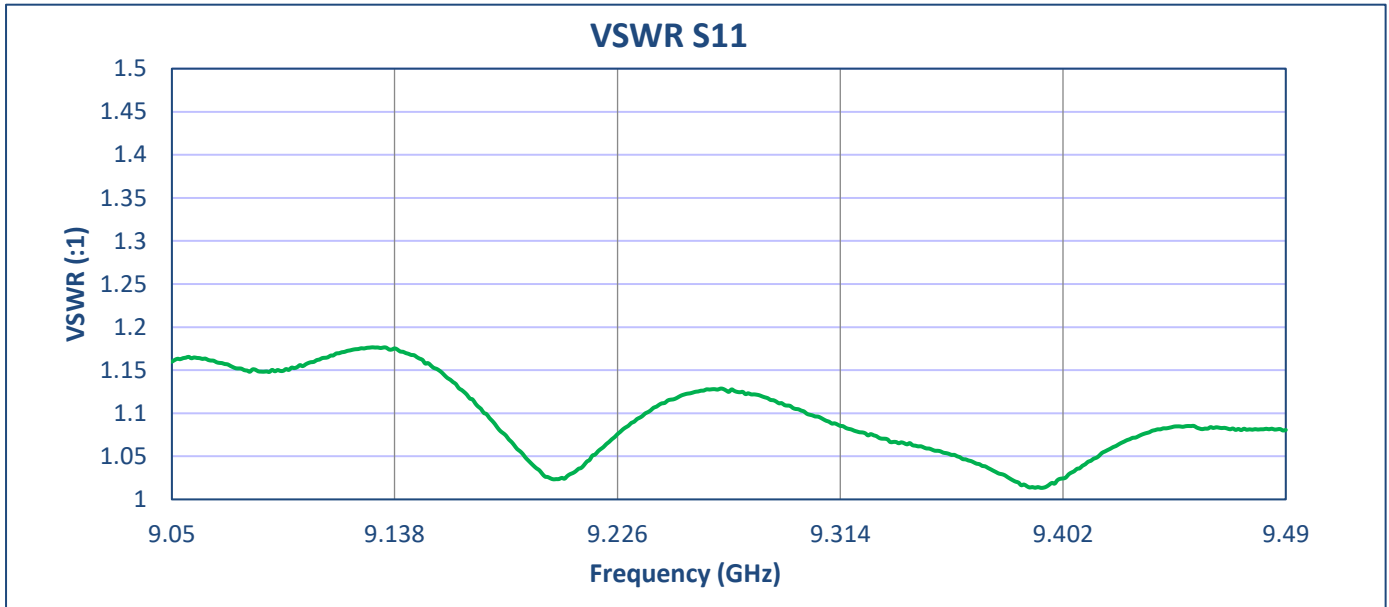

**SUMMARY TEST DATA
ON
BPF-9D05G9D49G-SFF**

PL58090/2608

