



**SUMMARY TEST DATA  
ON  
PEC-25-500M40G-20-12-292FF-OPT125**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: PEC-25-500M40G-20-12-292FF-OPT125  
 Serial No: PL25439/1916

Tested By: K. Mansfield  
 Temperature: +25°C  
 Date: 4/18/2019  
 Drawing No: 27635780      REV: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC	
1	Frequency Range:	1.0 GHz - 25 GHz	1.0 GHz - 25 GHz	PMI QA 1	
2	Gain:	25 dB Typ.	27 dB Max. 24.7 dB Typ. 22.5 dB Min. See Plot		
3	Gain Flatness:	±2.5 dB Max.	±2.26 dB See Plot		
4	Noise Figure:	5.5 dB Typ.	4.7 dB See Plot		
5	OP1dB:	+19 dBm Typ. (1.0-18 GHz) +17 dBm Typ. (18-25 GHz)	+18.8 dBm Typ. (1.0-18 GHz) +18 dBm Typ. (18-25 GHz) See Plot		
6	Psat:	+23 dBm Typ. (1.0-18 GHz) +20 dBm Typ. (18-25 GHz)	+22.6 dBm Typ. (1.0-18 GHz) +20.9 dBm Typ. (18-25 GHz) See Plot		
7	VSWR: (Input/Output)	2.0:1 / 2.5:1 Max.	2.1:1 In 1.7:1 Out See Plot		
8	Input Power Handling:	+17 dBm CW Max.	Pass		
9	DC Supply:	+12 to +15 VDC @ 350 mA Nominal	+12 to +15 VDC @ 240 mA		PMI QA 1

QA/QC Approval: \_\_\_\_\_

PMI  
QA 1


Date: \_\_\_\_\_

4/22/19



# SUMMARY TEST DATA ON PEC-25-500M40G-20-12-292FF-OPT125

PL25439/1916

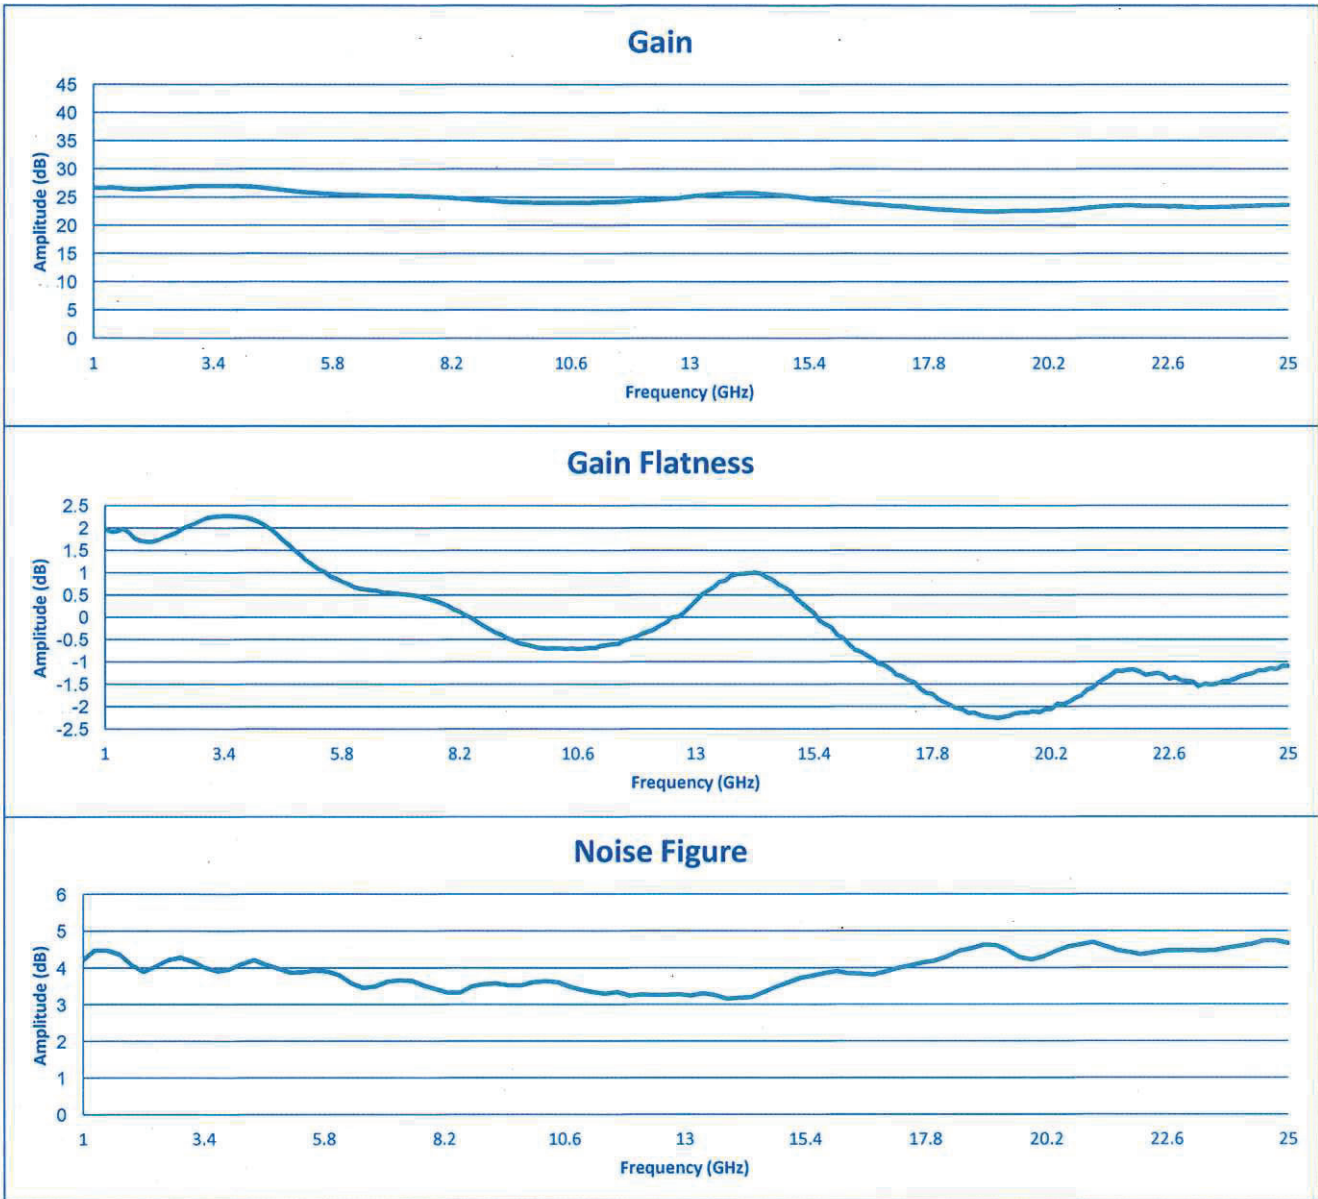



# SUMMARY TEST DATA ON PEC-25-500M40G-20-12-292FF-OPT125

PL25439/1916

