

SUMMARY TEST DATA ON QC-7G18G-SFF-30W

Customer: _____
 SO No: _____
 Model No: QC-7G18G-SFF-30W
 Serial No: 23532
 Part No: _____

Tested By: E. Kretz
 Temperature: +25°C
 Date: 4/14/2025
 Drawing No: 27625862 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	7.0 to 18.0 GHz	7.0 to 18.0 GHz	PMI QA4
2	Insertion Loss:	≤1.3 dB	1.06 dB (See Plot)	
3	VSWR:	≤1.4:1	1.34:1 (See Plot)	
4	Nominal Split:	3.01 dB	Pass (See Typical Characteristics)	
5	Isolation:	18 dB Minimum	22.5 dB (See Plot)	
6	Amplitude Balance:	±0.5 dB	±0.37 dB (See Plot)	
7	Phase Balance:	±5°	-0.1° -2.2° (See Plot)	
8	Power Handling:	Average ≤30 W Peak ≤1 kW	Average ≤30 W Peak ≤1 kW	
9	Impedance:	50 Ω	50 Ω	


QA/QC Approval: Cummins Kelly

Date: 4/17/25


SUMMARY TEST DATA ON QC-7G18G-SFF-30W

23532


Insertion Loss

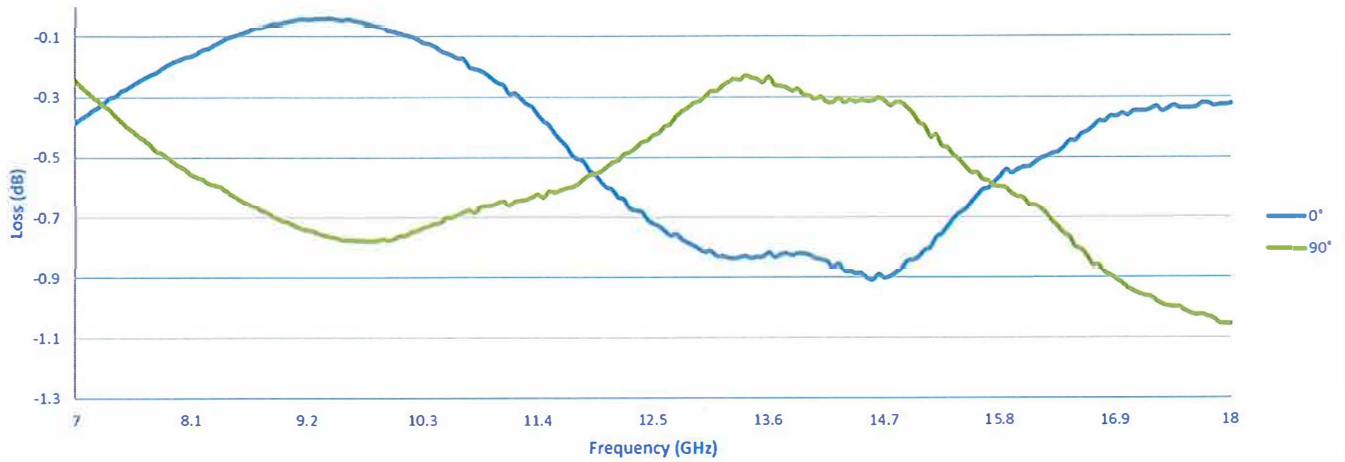

VSWR

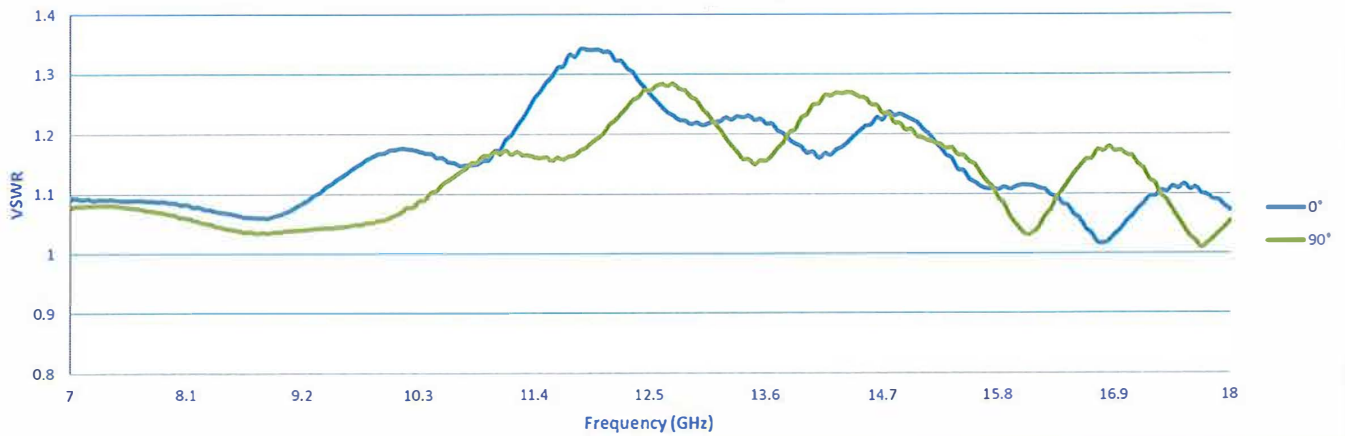

Isolation

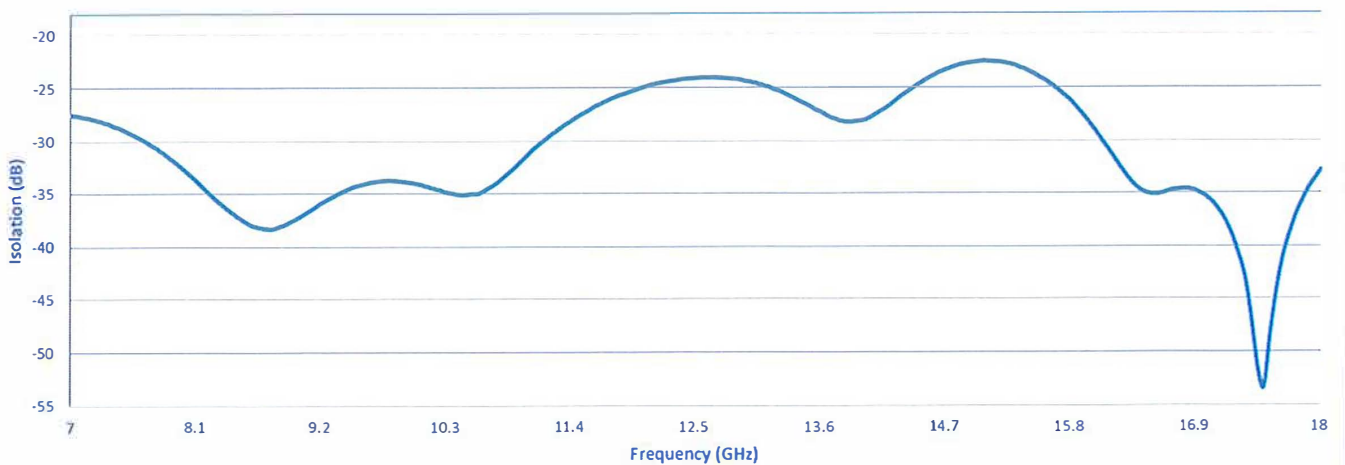

**SUMMARY TEST DATA
ON
QC-7G18G-SFF-30W**

23532

