

DESCRIPTION

PMI MODEL APD-4-2G26G-SFF-1W IS 2.0 TO 26.0 GHz, 4-WAY POWER DIVIDER. THIS MODEL OFFERS A MAXIMUM INSERTION LOSS OF 2.25 dB WITH A MAXIMUM VSWR OF 1.7:1 AND A MINIMUM ISOLATION OF 15 dB.

SPECIFICATIONS

- FREQUENCY RANGE: 2.0 TO 26.0 GHz
- INSERTION LOSS: 2.25 dB MAX
- VSWR: 1.8:1 MAX
- ISOLATION: 15 dB MIN
- AMPLITUDE BALANCE: ± 0.6 dB MAX
- PHASE BALANCE: $\pm 7.5^\circ$ MAX
- AMPLITUDE CHANGE OVER TEMPERATURE RANGE: < 0.5 dB
- PHASE CHANGE OVER TEMPERATURE RANGE: $< 7.5^\circ$
- REVERSE POWER HANDLING: > 1 WATT CW
- CONNECTORS: 2.92 mm FEMALE (X5)
- FINISH: PAINTED BLUE

ENVIRONMENTAL RATINGS

- TEMPERATURE: 10 °C TO +50 °C (OPERATING)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A


NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

PMI CONFIDENTIAL AND PROPRIETARY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	02/15/18	
	A1	ECN #21-0017	02/10/22	

MECHANICAL OUTLINE

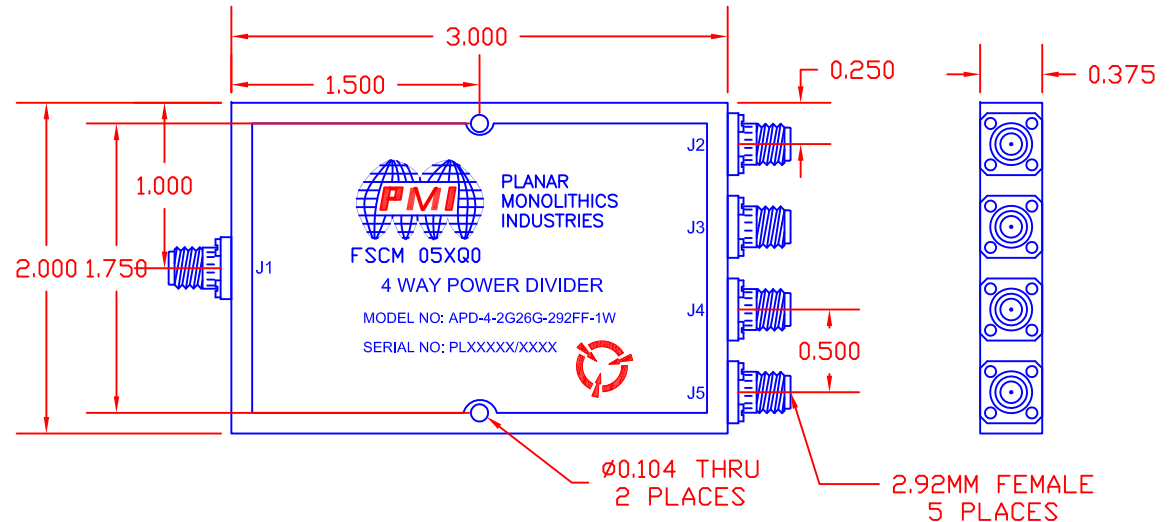

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN <i>E.M.F.</i>		2/15/18	PRODUCT FEATURE APD-4-2G26G-SFF-1W		
CHECKED			SIZE A	FSCM NO. 05XQ0	DWG NO. 27034380
ISSUED			SCALE N:S		SHEET 1 OF 1
					REV. A1