

**SUMMARY TEST DATA
ON
P3T-8G12G-70-T-SFF**

Customer: _____
 SO No: _____
 Model No: **P3T-8G12G-70-T-SFF**
 Serial No: **34197**
 Part No: _____

Tested By: **L. McGraw**
 Temperature: **25°C**
 Date: **6/28/2023**
 Drawing No: **27026602** Rev: **A1**




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	8 GHz to 12 GHz	8 GHz to 12 GHz	PMI QA2
2	Impedance	50 Ω	Pass	
3	Operating Power CW	20 dBm Max	Pass See Typical Characteristics	
4	Survival Power CW	30 dBm Max	Pass See Typical Characteristics	
5	VSWR: In/Out	1.8 dB Typ.	1.23:1 In 1.38:1 Out	
6	Insertion Loss	2.8 dB Max.	2.28 dB	
7	Isolation	70 dB Min.	76.3 dB	
8	Switching Speed Max	100 ns Max.	Pass See Typical Characteristics	
9	Power Supply	5 V @ 150 mA Typ -15 V @ 100 mA Typ	5 V @ 78 mA -15 V @ 68 mA	
10	Control Signal	TTL LOGIC '0' : Insertion Loss '1' : Isolation	Pass	

QA/QC Approval: *Camery Uelzy* PMI
 QA2

Date: 06/28/23

SUMMARY TEST DATA
ON
P3T-8G12G-70-T-SFF

34197

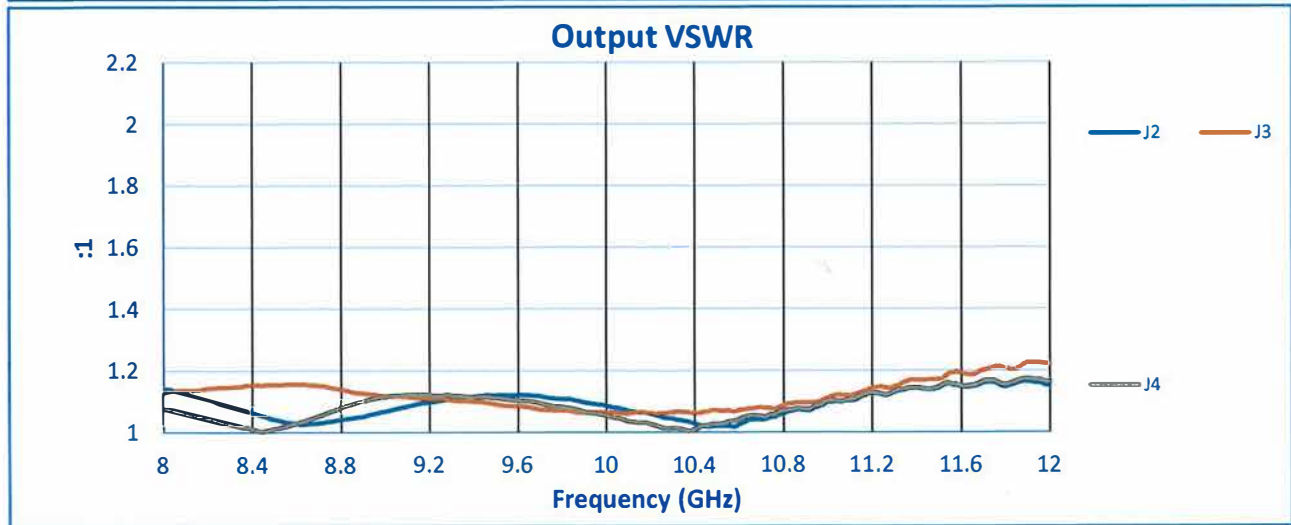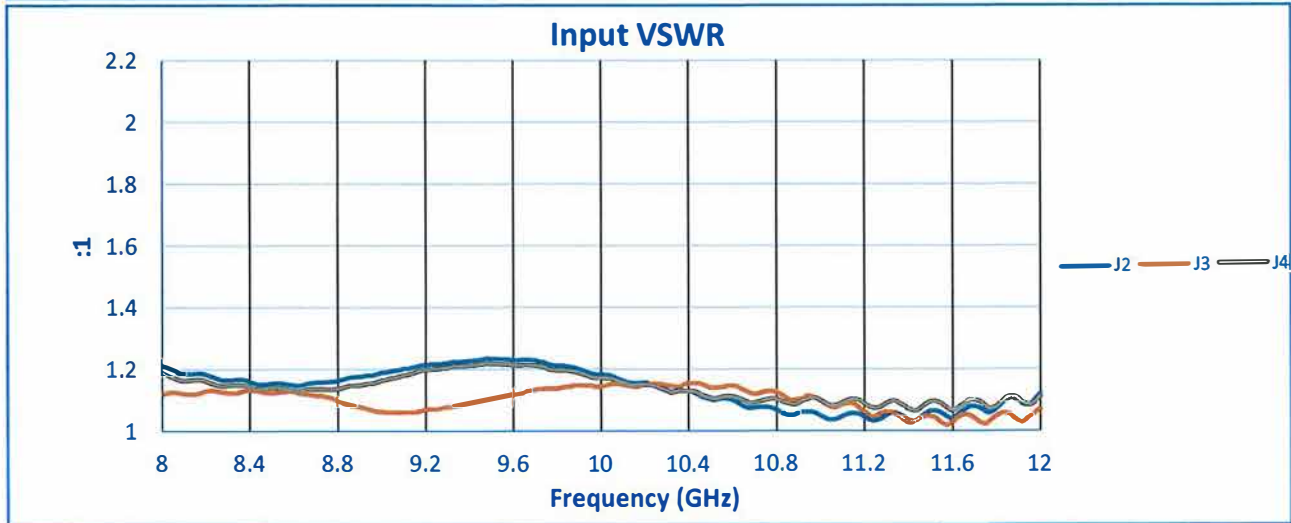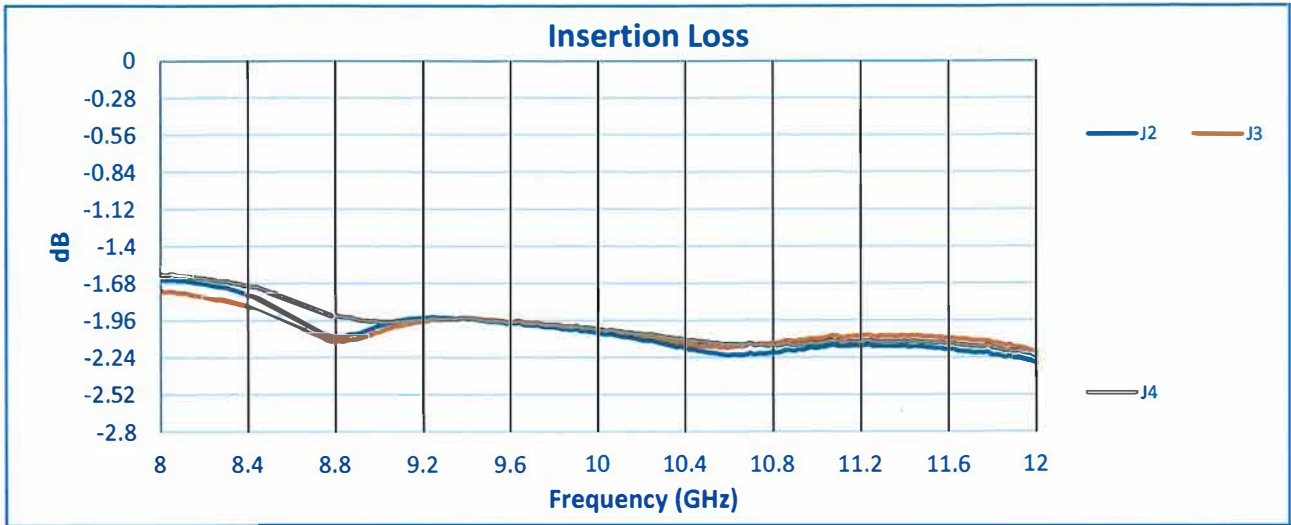

SUMMARY TEST DATA
ON
P3T-8G12G-70-T-SFF

34197

