

**SUMMARY TEST DATA
ON
P3T-8G12G-70-T-SFF**

Customer: _____ Tested By: K. Mansfield
 SO No: _____ Temperature: 25°C
 Model No: P3T-8G12G-70-T-SFF Date: 11/15/2023
 Serial No: 34276 Drawing No: 27026603 Rev: A1
 Part No: _____


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	8 GHz to 12 GHz	8 GHz to 12 GHz	PMI QA2
2	Impedance	50 Ω	Pass	
3	Operating Power CW	20 dBm Max	Pass See Typical Characteristics	
4	Survival Power CW	30 dBm Max	Pass See Typical Characteristics	
5	VSWR: In/Out	1.8 dB Typ.	1.26:1 In 1.39:1 Out	
6	Insertion Loss	2.8 dB Max.	2.27 dB	
7	Isolation	70 dB Min.	79.3 dB	
8	Switching Speed Max	100 ns Max.	Pass See Typical Characteristics	
9	Power Supply	5 V @ 150 mA Typ -15 V @ 100 mA Typ	5 V @ 73 mA -15 V @ 56 mA	
10	Control Signal	TTL LOGIC '0' : Insertion Loss '1' : Isolation	Pass	PMI QA2

QA/QC Approval:  PMI
QA2

Date: 11/16/2023

**SUMMARY TEST DATA
ON
P3T-8G12G-70-T-SFF**

34276

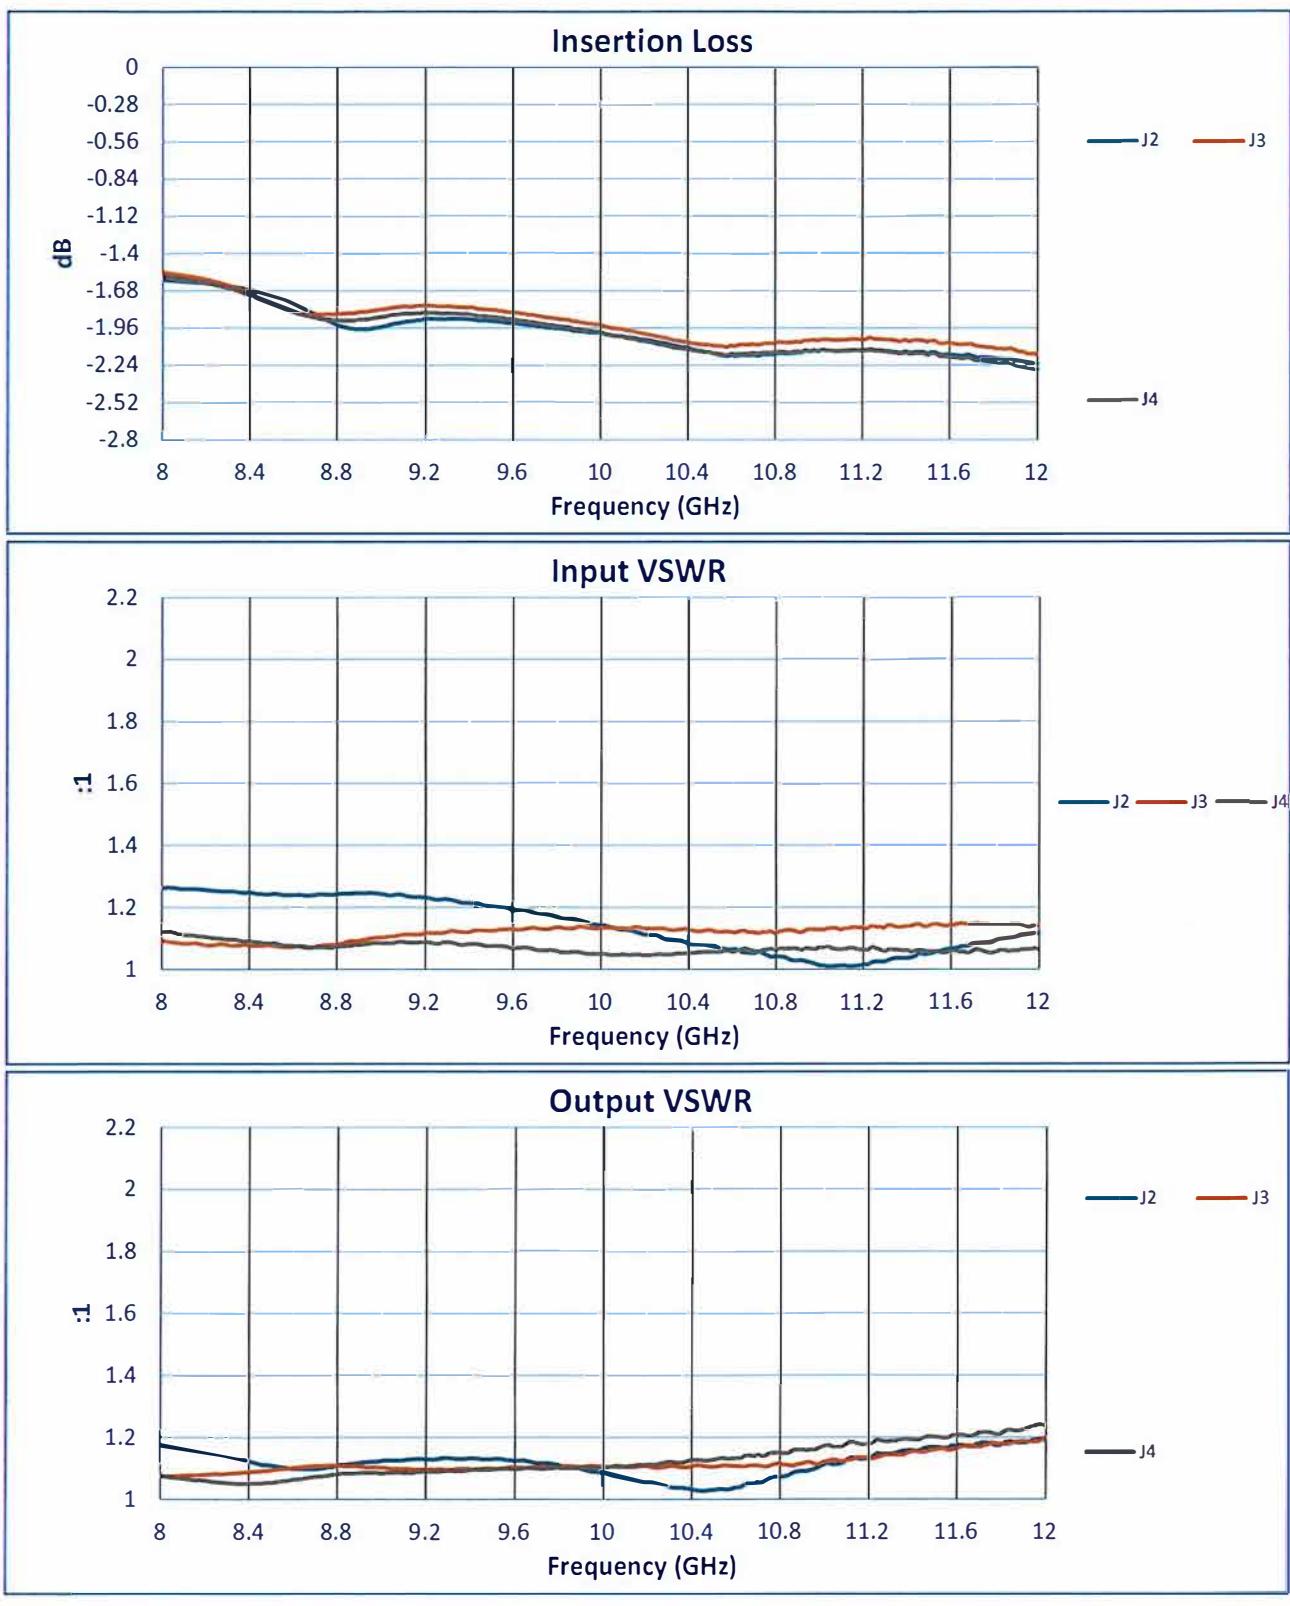

**SUMMARY TEST DATA
ON
P3T-8G12G-70-T-SFF**

34276

