


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	ENGINEERING RELEASE	10/21/25	TOM B

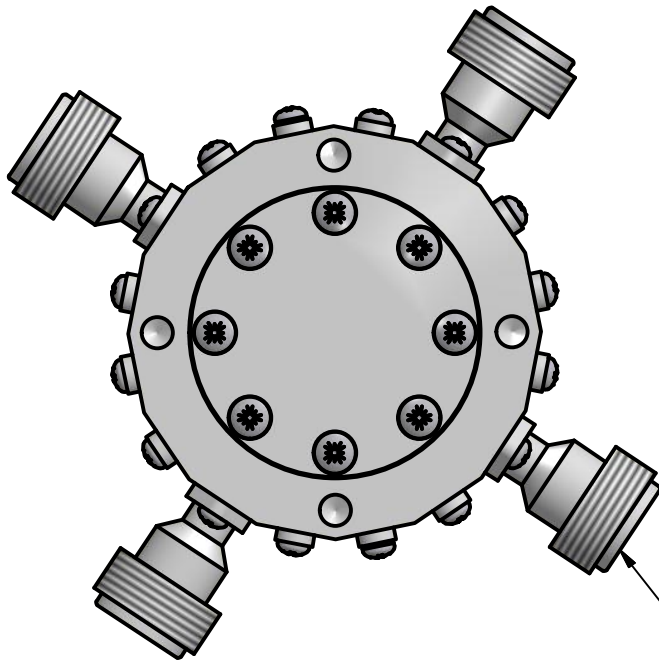


TYPE N FEMALE 4 PLS.

SPECIFICATIONS			
FREQUENCY :	DC -1.5 GHz	1.5-4.0 GHz	4.0-6.5 GHz
INSERTION LOSS *:	9-13 dB	9-14 dB	7-19 dB
MAX VSWR :	1.2:1	1.6:1	2.3:1
MAX AMPLITUDE BALANCE :	3.5 dB	3.5 dB	8.0 dB
MAX PHASE BALANCE :	N/A		
NUMBER OF PORTS :	4		
MAX POWER			
AS COMBINER :	1/8 W AVG.		
AS DIVIDER :	1/8W AVG.		
ENVIRONMENT :	INDOOR		

* INSERTION LOSS = ISOLATION

R&D MICROWAVES LLC PROPRIETARY INFORMATION

DRAWN TomB	10/21/2025		R&D Microwaves LLC, USA	
CHECKED			TITLE	
QA		N FEMALE RESISTIVE POWER DIVIDER, DC-6.5 GHz		
MFG		SIZE	DWG NO	REV
APPROVED		A	D3-A39-OLrev1	1
		SCALE	SHEET 1 OF 1	