




**SUMMARY TEST DATA
ON AMPLIFIER**

Customer :
 Job No :
 Model No : PE2-18-218-15-SFM
 Serial No : PL1073

Tested By : Kevin Mason
 Temperature : +25°C
 Date : 09/04/03

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	Frequency Range:	2-18 GHz	Pass (See Plot)	
2	Gain Window:	15 to 18dB	Pass (See Plot)	
3	Flatness:	±1.5 dB Max.	±1.10 dB	
4	Noise Figure:	4.5 dB Max.	Pass (See Plot)	
5	Pout @ 1dB Compression:	+15 dBm Min.	≥ +15 dBm	
6	VSWR:	Input : 2.0:1 Output: 2.0:1 Max.	Pass (See Plot)	
7	DC Supply:	200mA @ +15V Max.	157mA @ +15V	


Production Manager Approval:  Date: 09/04/03

QA/QC Approval:  Date: 09/04/03

VNA Plot

4 Sep 2003 11:16:08

CH1	S21	LOG	3 dB/	REF 15 dB	2:	15.703 dB	13.780 000 000 GHz
CH2	S11	LOG	5 dB/	REF -9.54 dB	1:-	12.549 dB	2.900 000 000 GHz
CH3	S22	LOG	5 dB/	REF -9.54 dB	1:-	9.7270 dB	18.000 000 000 GHz

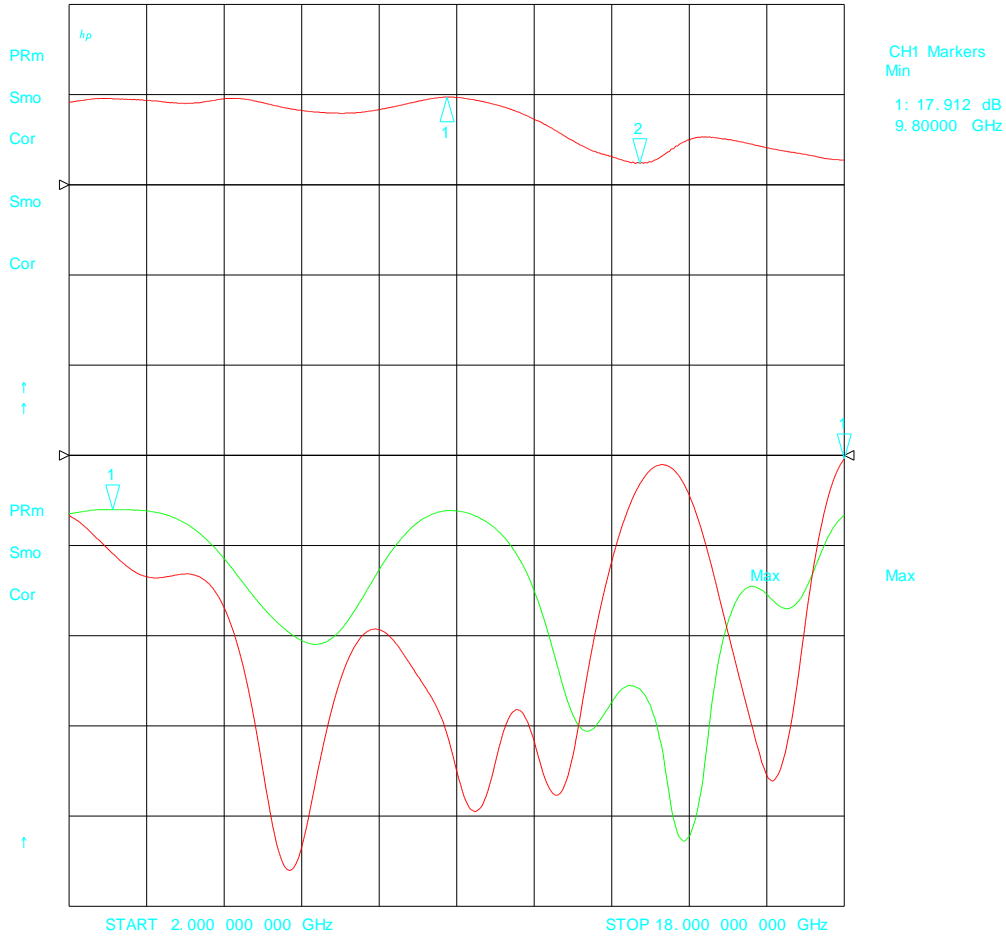

Noise Figure Plot

