

SUMMARY TEST DATA ON APD-4-800M2D5G-SFF-30W

Customer: _____
 SO No: _____
 Model No: APD-4-800M2D5G-SFF-30W
 Serial No: 13063
 Part No: _____

Tested By: Bryan K.
 Temperature: +25 C
 Date: 4/19/2021
 Drawing No: 276256693 Rev: A1



TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	0.8 to 2.5 GHz	0.8 to 2.5 GHz	PMI QA 2	
2	Insertion Loss	≤0.7 dB	0.59 dB (See Plot)		
3	Isolation	20 dB Minimum	22.9 dB (See Plot)		
4	VSWR	≤1.25:1	1.16:1 (See Plot)		
5	Amplitude Balance	±0.3 dB	0.02 dB Max. -0.18 dB Min. (See Plot)		
6	Phase Balance	±6°	2.64° Max. 0.18° Min. (See Plot)		
7	Power Handling:	Forward ≤30W Reversed ≤1 W	Pass See Typical Characteristics		
8	Impedance:	50 Ω	50 Ω		PMI QA 2

Note: Amplitude and phase balance are relative to J2 Port.

QA/QC Approval:   PMI
QA 2 4/20/21

SUMMARY TEST DATA ON APD-4-800M2D5G-SFF-30W

13063

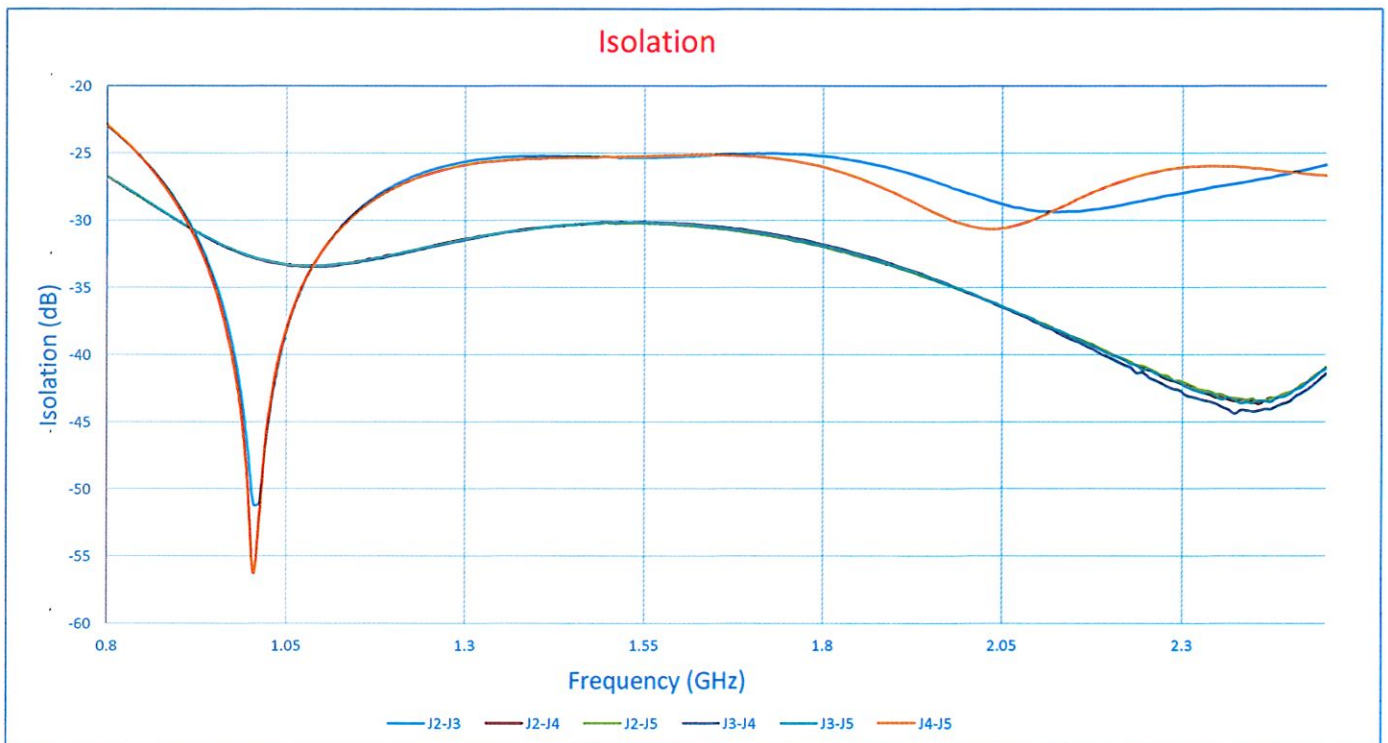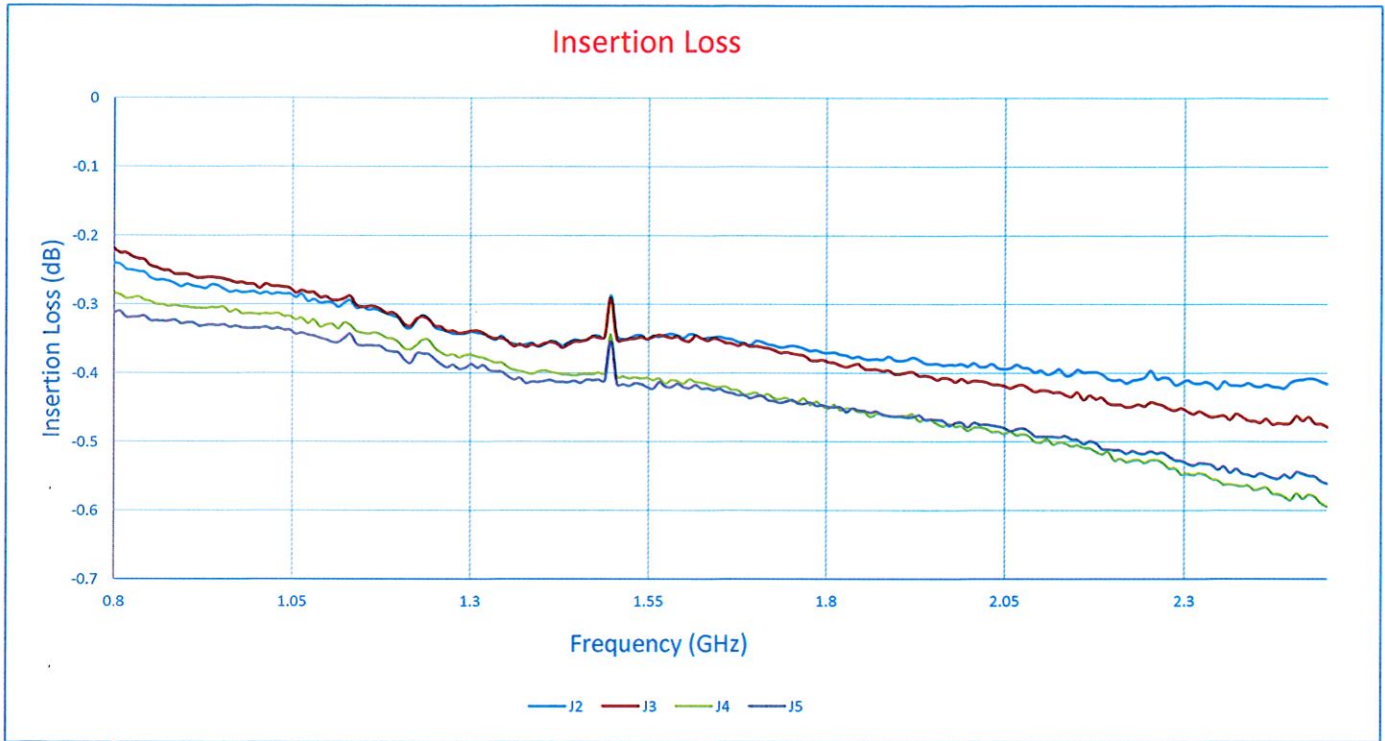

SUMMARY TEST DATA ON APD-4-800M2D5G-SFF-30W

13063

