


**SUMMARY TEST DATA
ON
APD-2-800M2D5G-NFF-50W**

Customer: _____
 SO No: _____
 Model No: APD-2-800M2D5G-NFF-50W
 Serial No: 13164
 Part No: _____

Tested By: Tin Lay
 Temperature: +25 C
 Date: 7/21/2021
 Drawing No: 27627902 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	0.8 TO 2.5 GHz	0.8 TO 2.5 GHz	PMI QA 2
2	Insertion Loss	0.4 dB Maximum	0.36 dB See Plot	
3	Isolation	22 dB Minimum	26.34 dB See Plot	
4	VSWR	≤1.25:1	1.14 :1 See Plot	
5	Phase Balance	±2° Maximum	0.18° See Plot	
6	Amplitude Balance	±0.2 dB Maximum	0.01 dB See Plot	
7	Power Handling	Forward ≤50 W Reversed ≤1 W	Pass	
8	Impedance	50 Ω	50 Ω	

QA/QC Approval: _____





PMI
QA 2

Date: _____

7/22/2021





SUMMARY TEST DATA ON APD-2-800M2D5G-NFF-50W

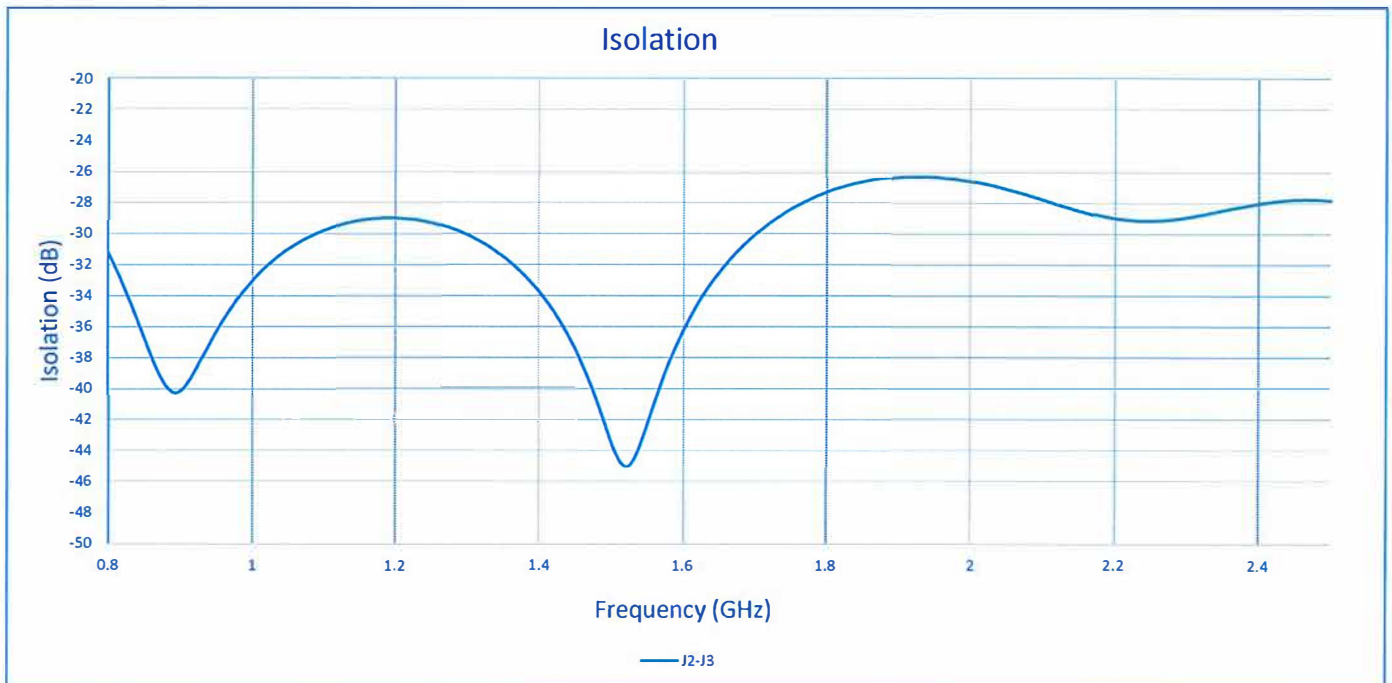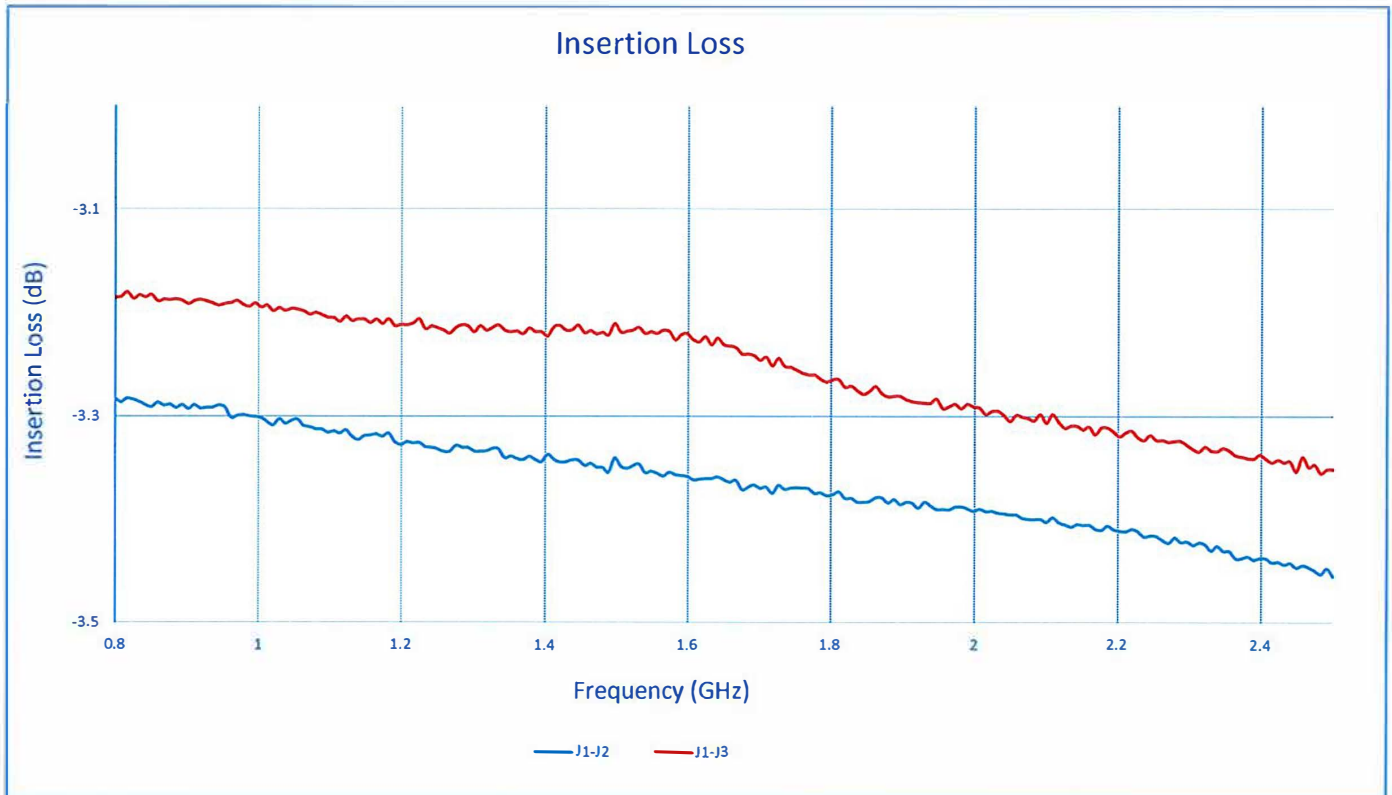



SUMMARY TEST DATA ON APD-2-800M2D5G-NFF-50W

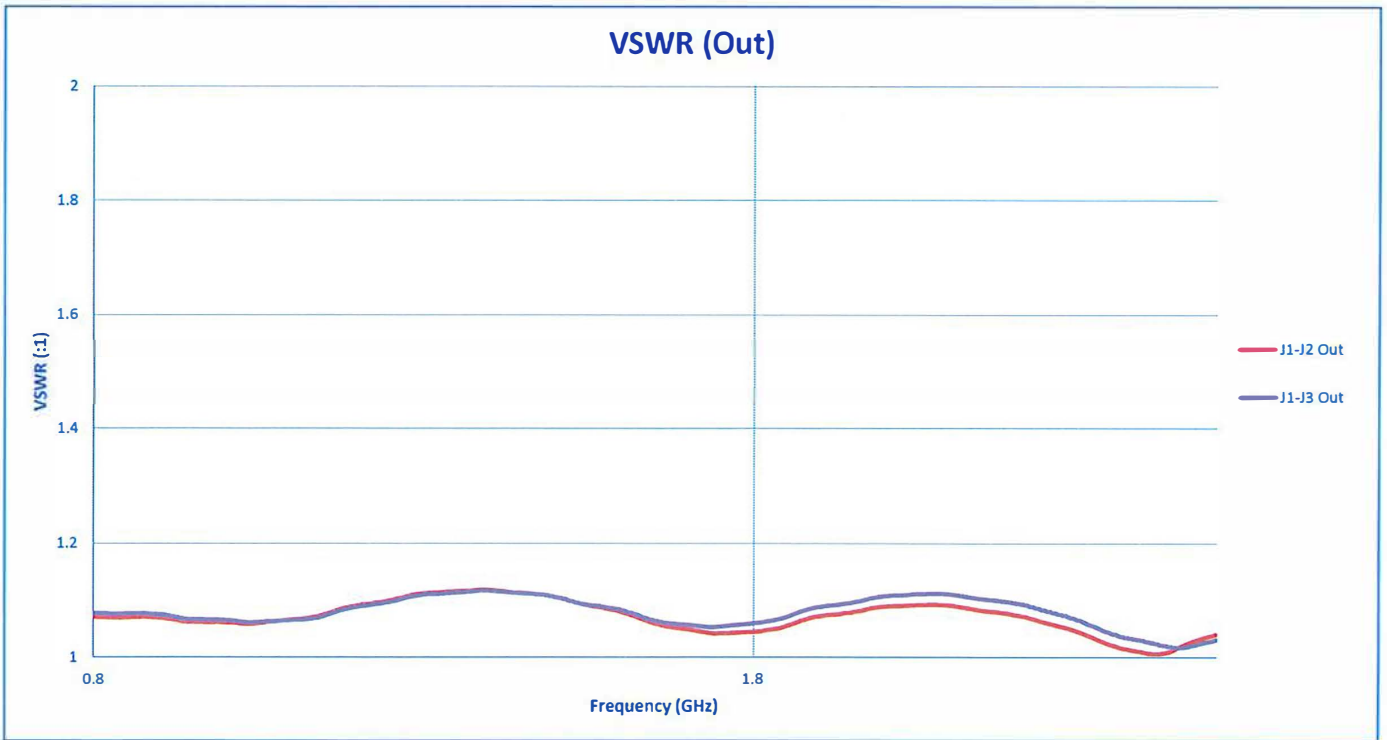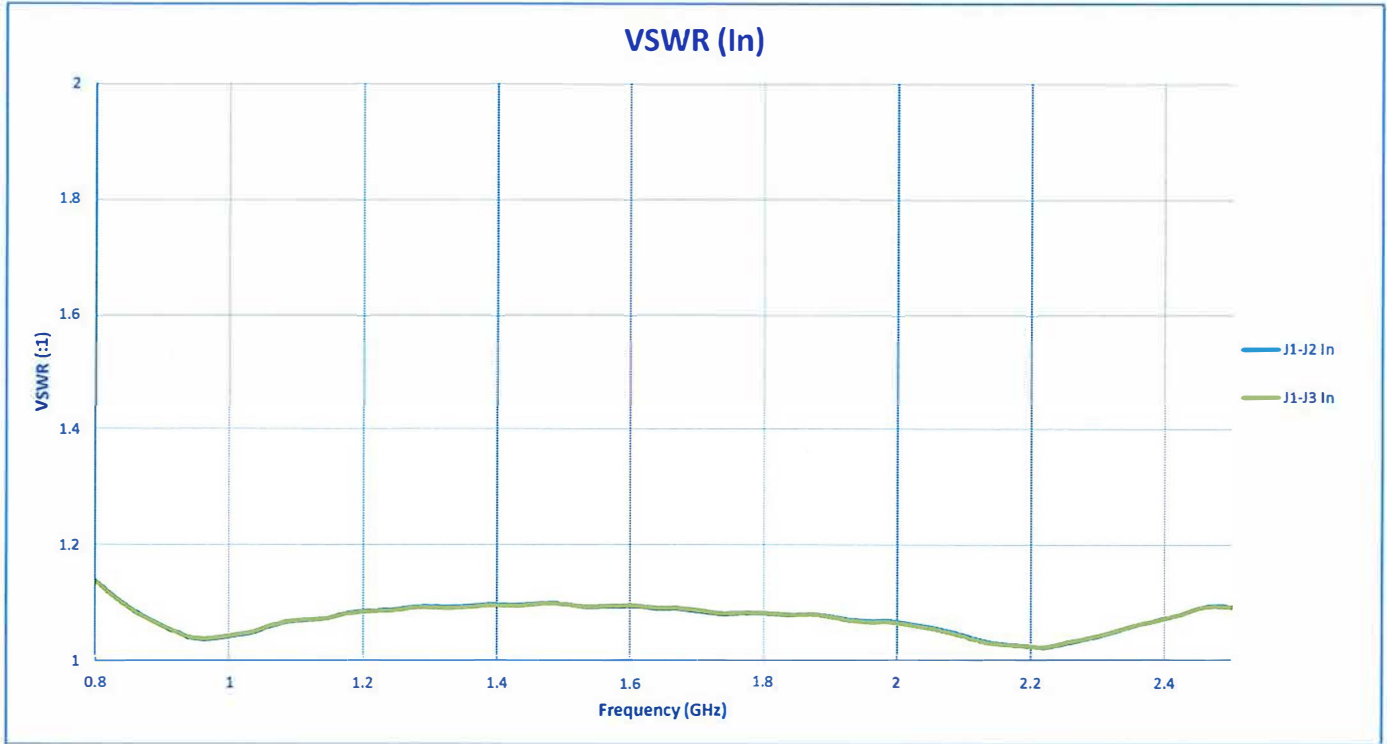



SUMMARY TEST DATA ON APD-2-800M2D5G-NFF-50W

