



**SUMMARY TEST DATA
ON
P6T-2G18G-60-T-512-SFF-LV**

PL15087/1418

Customer: _____ Tested By: Jerry Nguyen
 SO No: _____ Temperature: +25°C
 Model No: P6T-2G18G-60-T-512-SFF-LV Date: 03/22/17
 Serial No: PL15087/1418 Drawing No: 27620059 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	2 GHz to 18 GHz	2 GHz to 18 GHz	PMI QA 1	
2	Insertion Loss:	4.0dB Max	3.92dB (See Plot)		
3	Insertion Loss Tracking between all ports:	0.8dB Window Max	0.4dB (See Plot)		
4	Isolation:	60dB Min	79.68dB (See Plot)		
5	VSWR:	2.0:1 Max	1.99:1 (See Plot)		
6	Impedance:	50 Ohms	50 Ohms		
7	Input Power:	23dBm CW Max (Operating) 27dBm CW Max (Survival)	23dBm CW Max (Operating) 27dBm CW Max (Survival)		
8	Switching Speed:	50ns Max On - (50% TTL to 90% RF) Off - (50% TTL to 10% RF)	30ns (See Typical Characteristics)		
9	Switching Rate PRF:	5MHz	5MHz		
10	Video Leakage:	50mV Peak to Peak Max Measured at 300MHz BW	2mV (See Typical Characteristics)		
11	Control:	6 Line Independent TTL "0" - 1.6mA Max @ 0.4V (IL) "1" - 40uA Max @ 2.4V (Isol)	Pass		
12	DC Supply:	+5VDC @ 300mA Typ -12VDC @ 100mA Typ	122mA 33mA		PMI QA 1


QA/QC Approval:  PMI QA 1 Date: 3/26/18




**SUMMARY TEST DATA
ON
P6T-2G18G-60-T-512-SFF-LV**

PL15087/1418

Insertion Loss and Return Loss (J1 – J2)

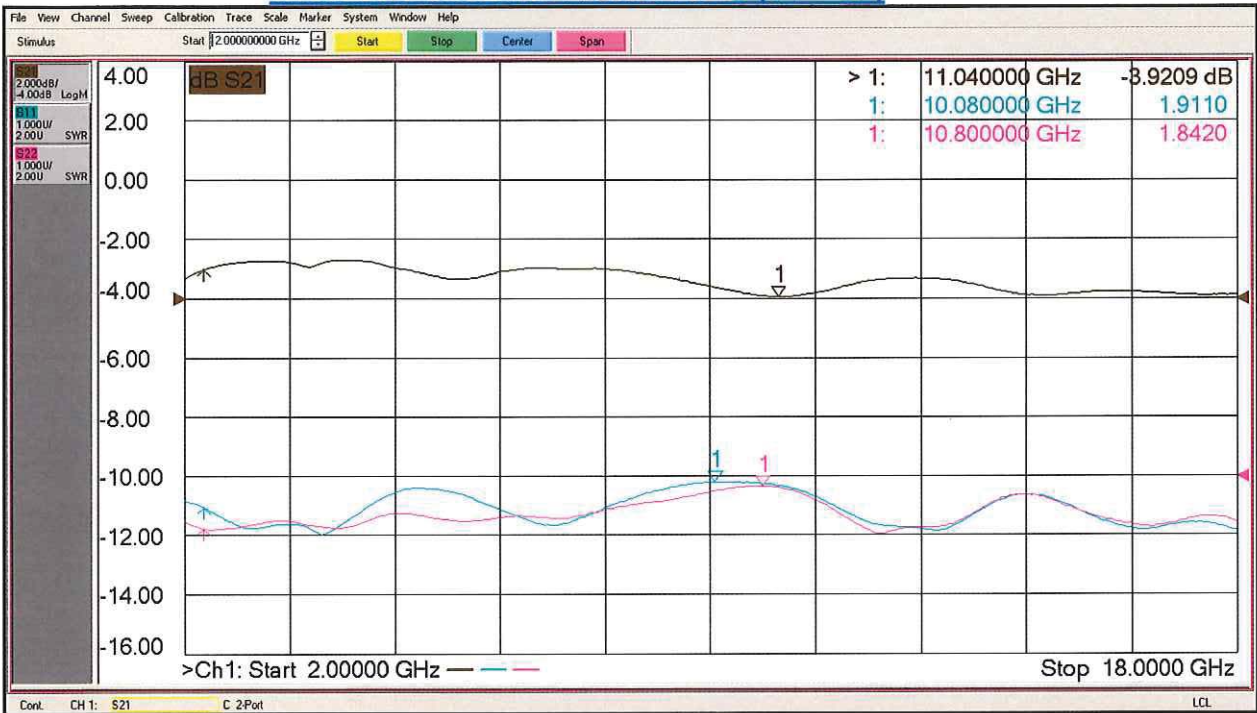

Insertion Loss and Return Loss (J1 – J3)

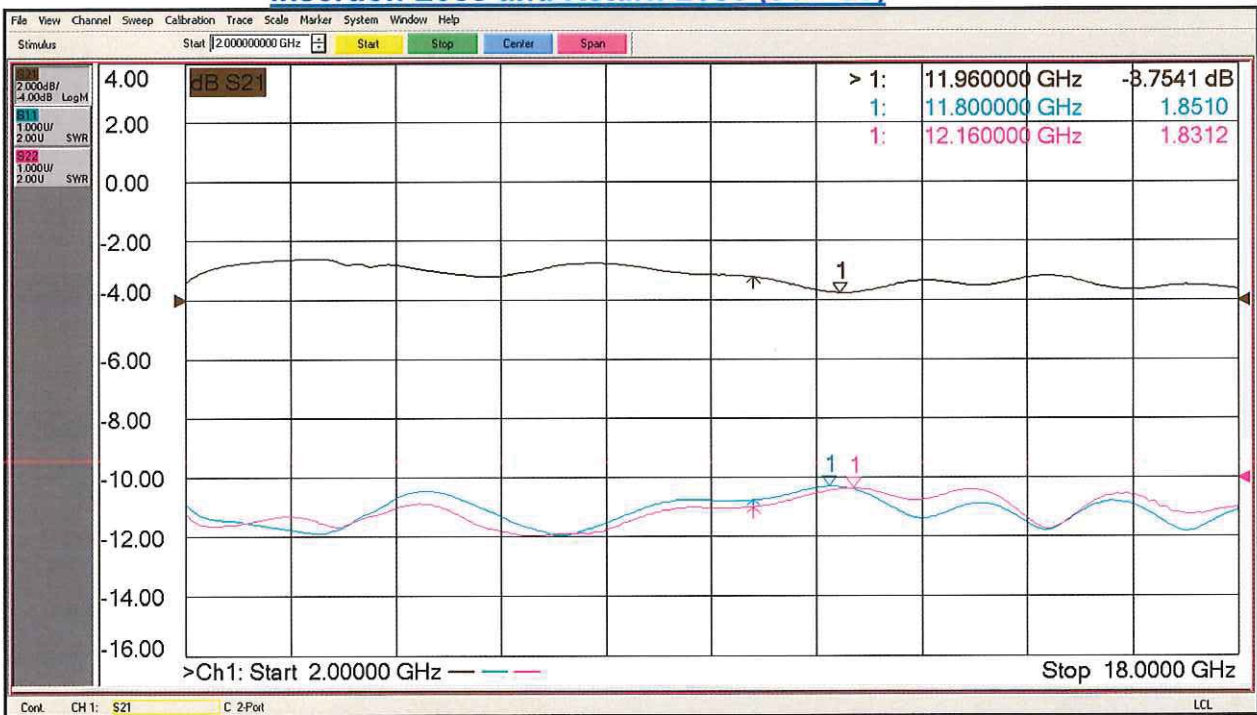





**SUMMARY TEST DATA
ON
P6T-2G18G-60-T-512-SFF-LV**

PL15087/1418

Insertion Loss and Return Loss (J1 – J4)

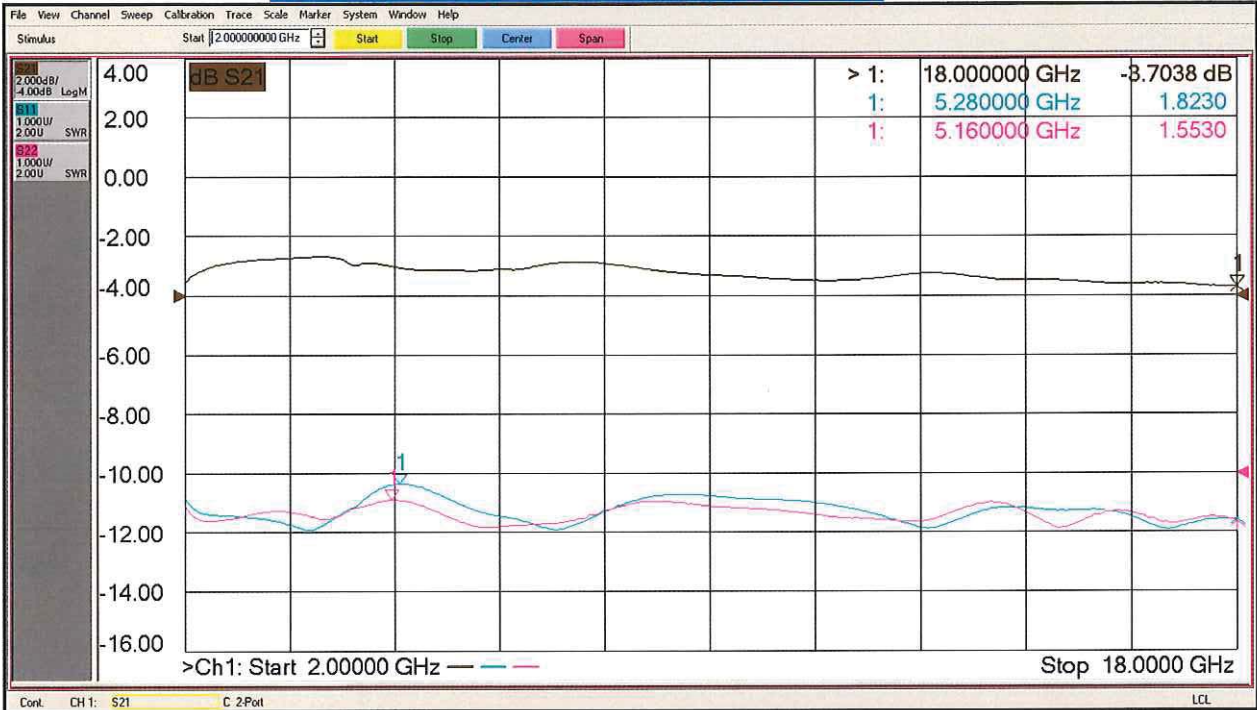

Insertion Loss and Return Loss (J1 – J5)

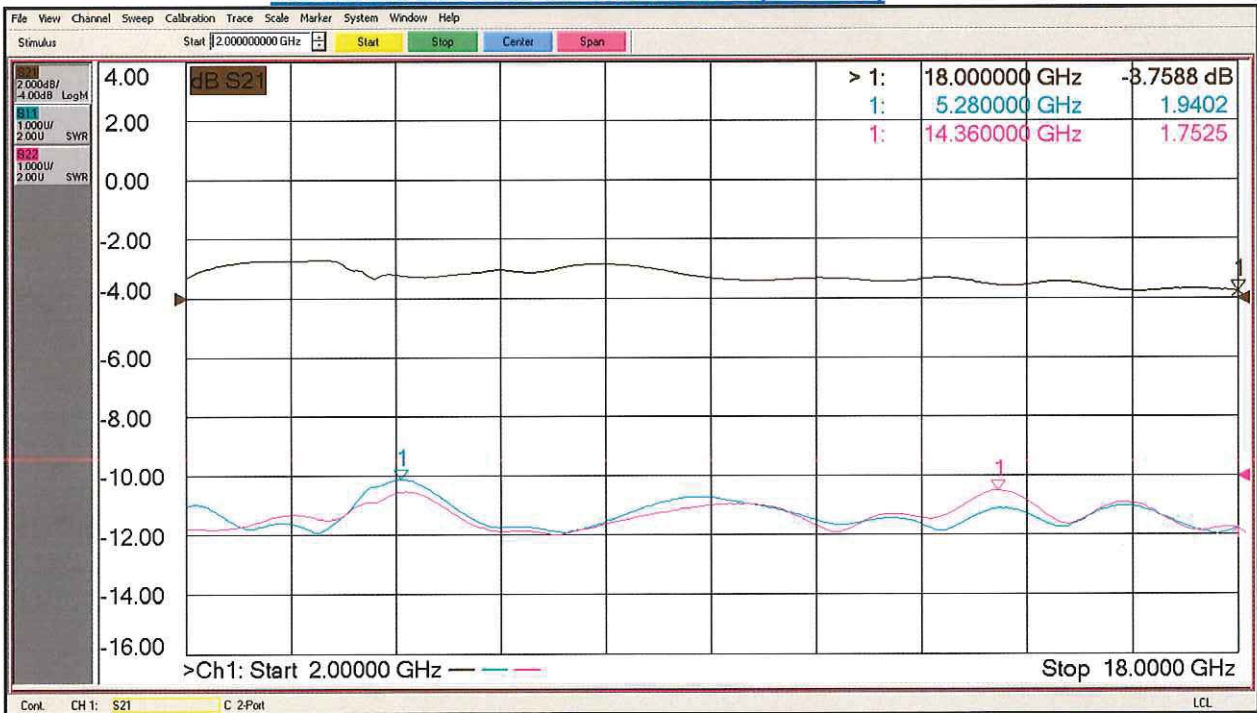





**SUMMARY TEST DATA
ON
P6T-2G18G-60-T-512-SFF-LV**

PL15087/1418

Insertion Loss and Return Loss (J1 – J6)

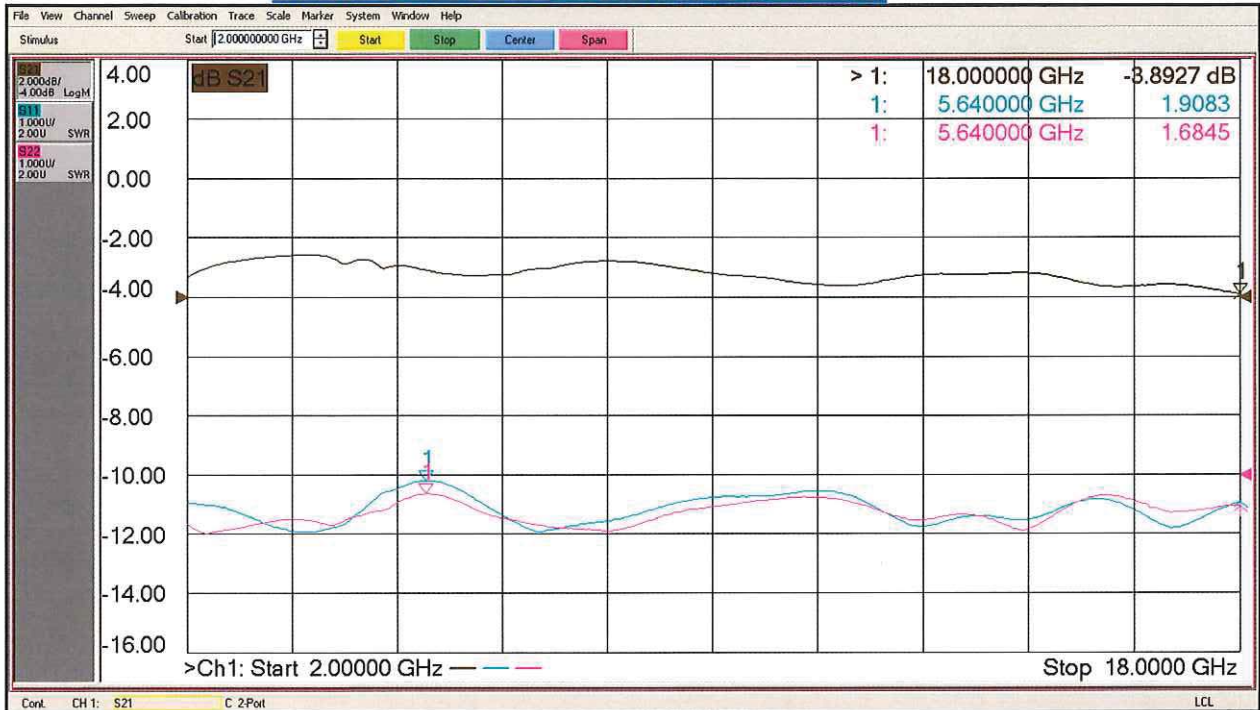

Insertion Loss and Return Loss (J1 – J7)

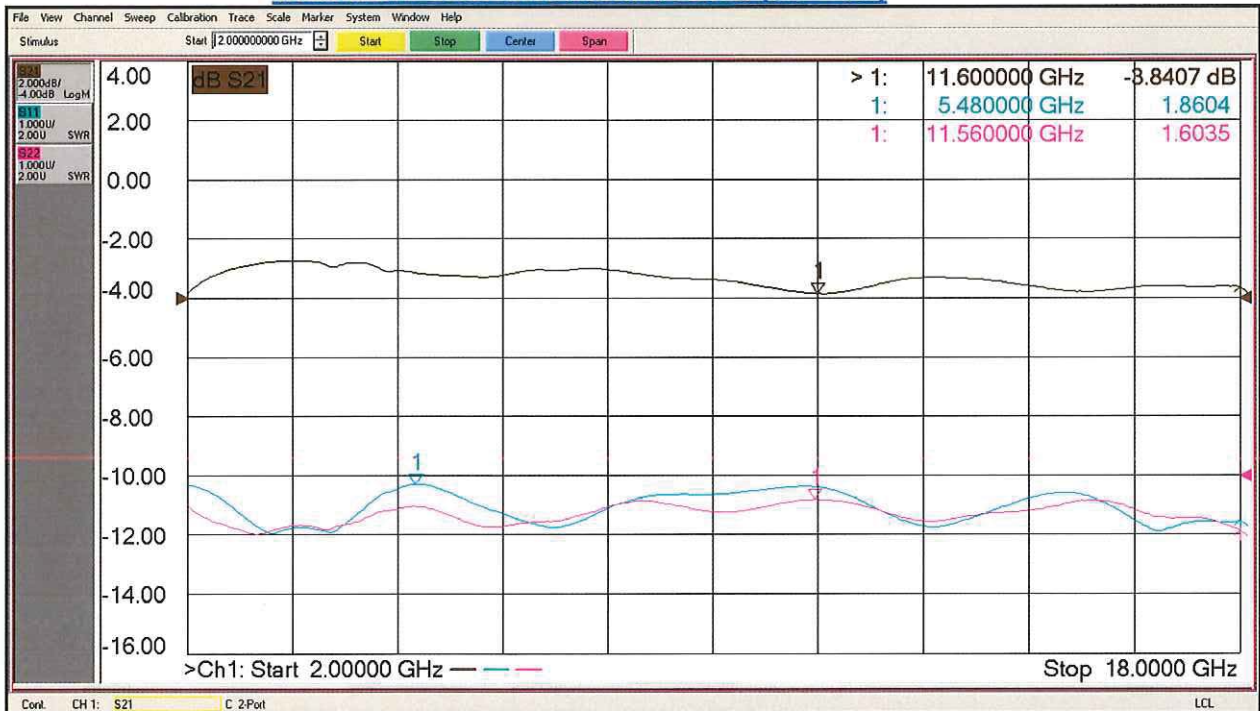





**SUMMARY TEST DATA
ON
P6T-2G18G-60-T-512-SFF-LV**

PL15087/1418

Isolation and Termination (J1 –J2)

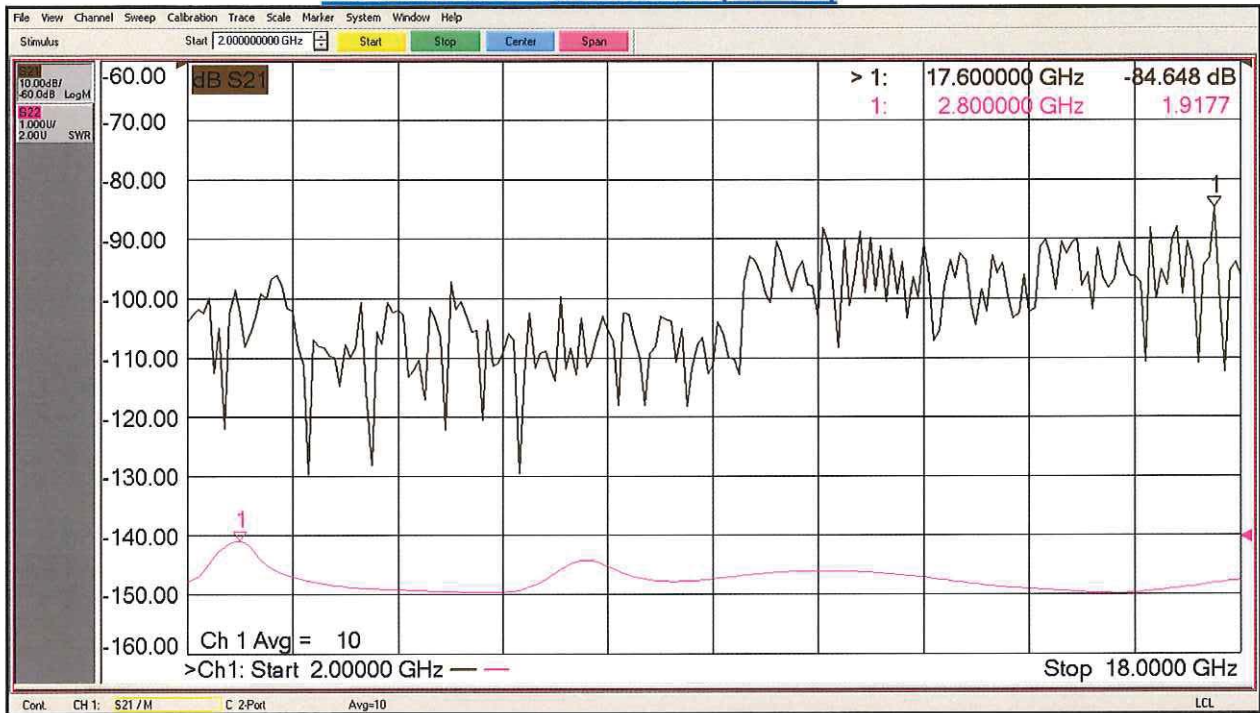

Isolation and Termination (J1 –J3)

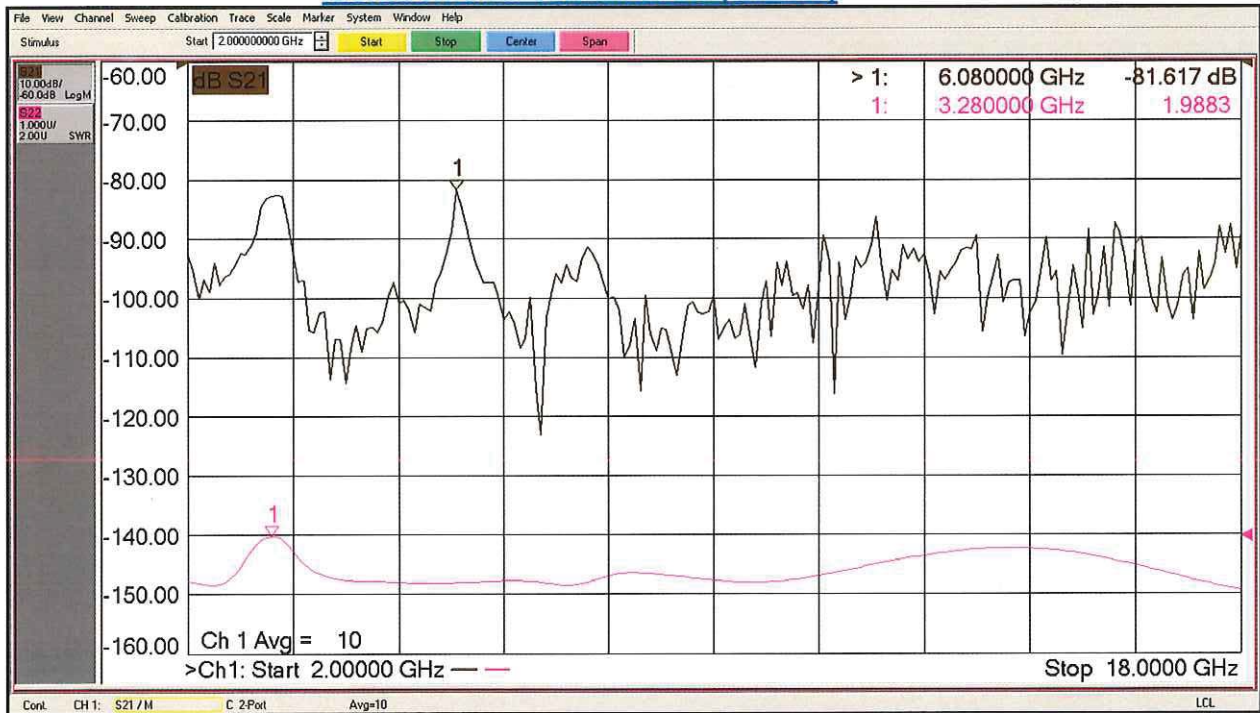





SUMMARY TEST DATA ON P6T-2G18G-60-T-512-SFF-LV

PL15087/1418

Isolation and Termination (J1 -J4)

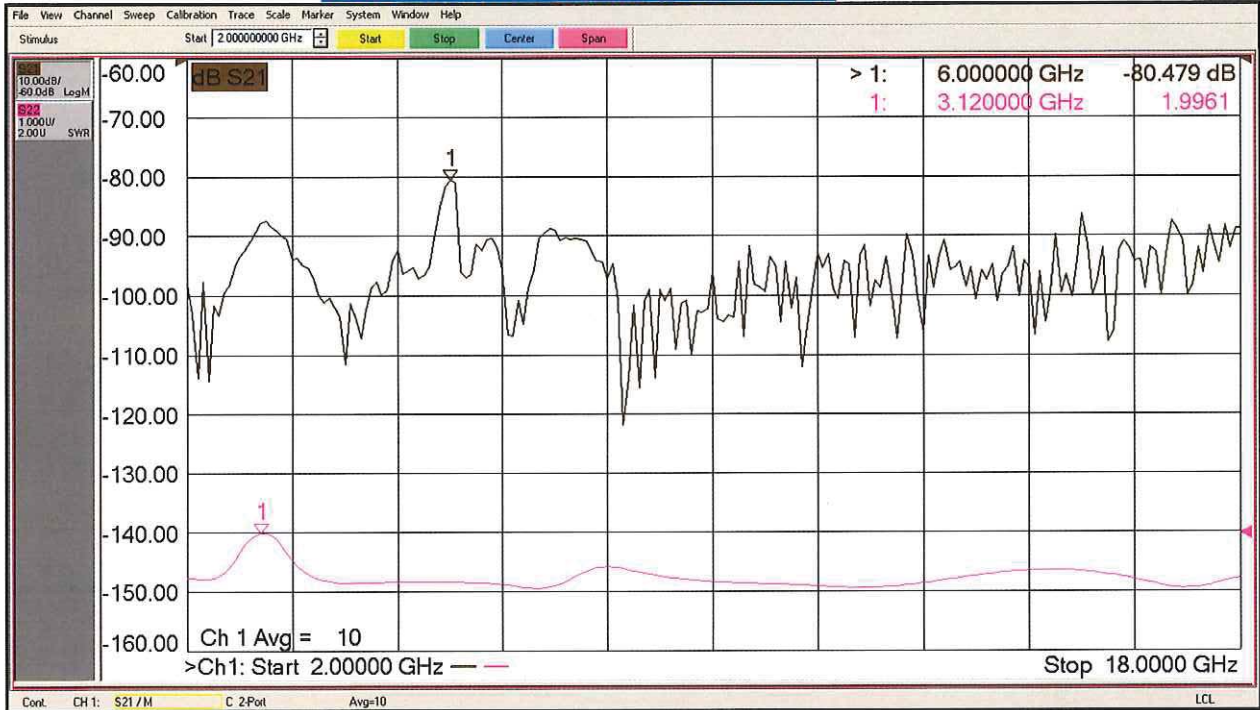

Isolation and Termination (J1 -J5)

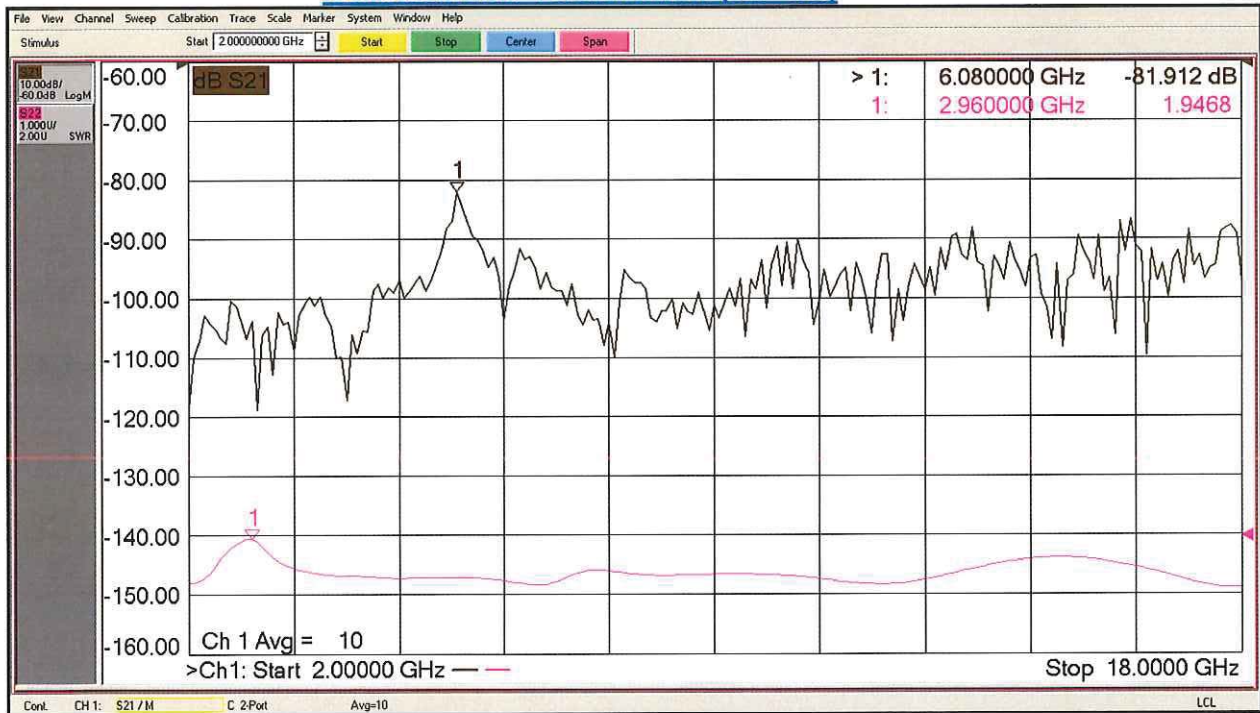





SUMMARY TEST DATA ON P6T-2G18G-60-T-512-SFF-LV

PL15087/1418

Isolation and Termination (J1 -J6)

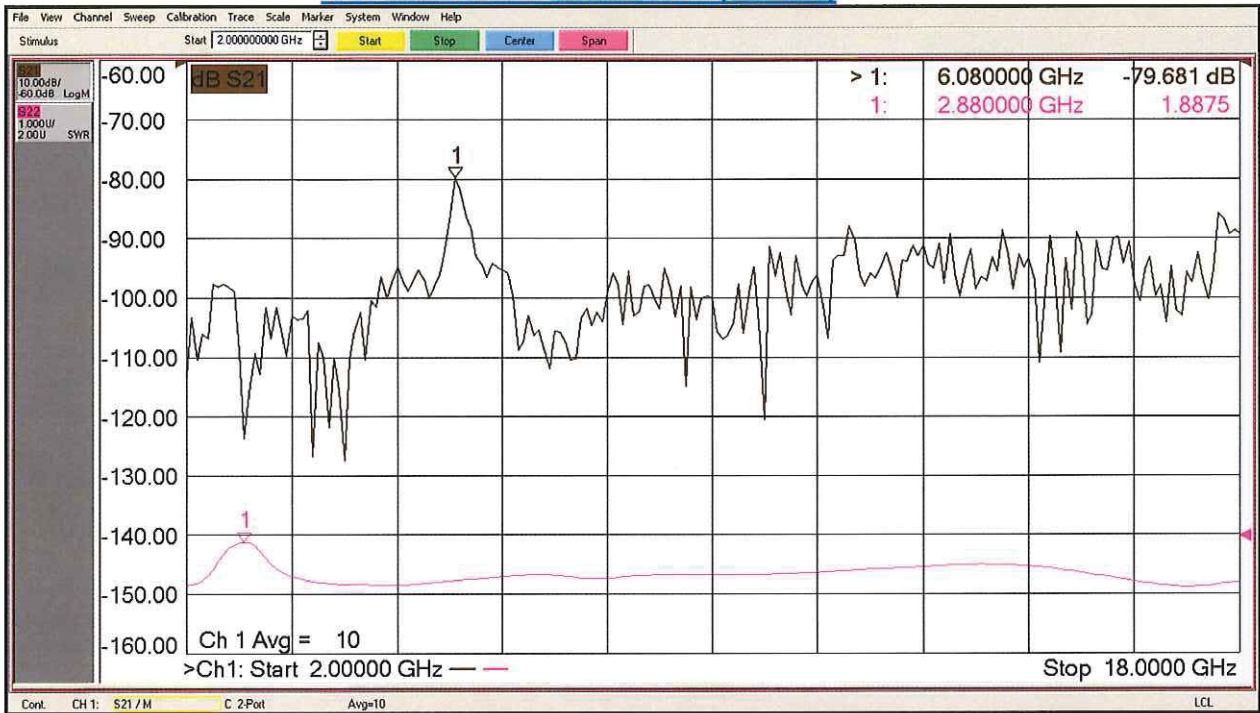

Isolation and Termination (J1 -J7)

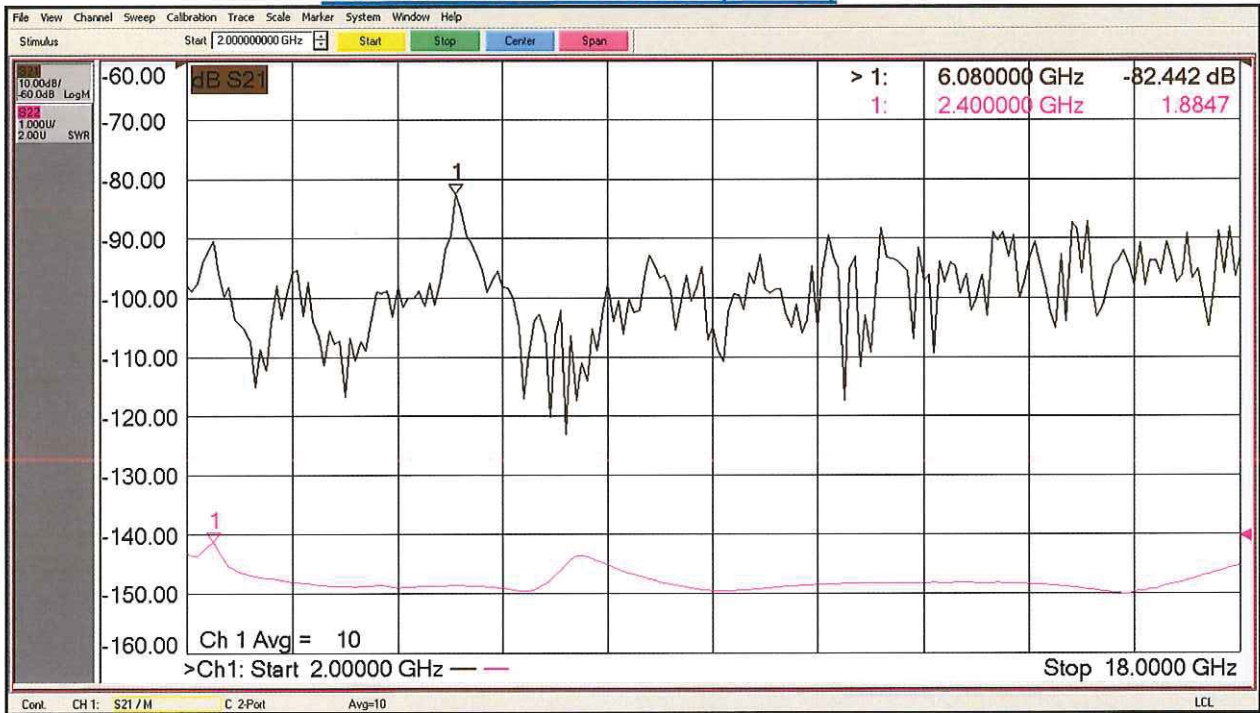

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com