



**SUMMARY TEST DATA
ON
P6T-2G18G-55-R-512-SFF**

PL21465/1732

Customer: _____	Tested By: <u>Jerry N</u>
SO No: _____	Temperature: <u>+25°C</u>
Model No: <u>P6T-2G18G-55-R-512-SFF</u>	Date: <u>08/14/17</u>
Serial No: <u>PL21465/1732</u>	Drawing No: <u>27613452</u> Rev: <u>A1</u>

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2 GHz – 18 GHz	2 GHz – 18 GHz	PMI QA 2
2	Insertion Loss:	7 dB Max.	6.86 dB (See Plot)	
3	Input Power:	10 dBm CW Max	Pass	
4	RF Power Survival:	25 dBm	25 dBm See Typical Characteristics	
5	VSWR (Input/Output):	2.0:1 Max	1.95 :1 (See Plot)	
6	Isolation:	55 dB Min.	56.60 dB (See Plot)	
7	Switching Speed:	15 ns Min.	15 ns See Typical Characteristics	
8	Video Transients:	15 mV PP	15 mV See Typical Characteristics	
9	Video Transients Spectral Content:	65 dBm	65 dBm See Typical Characteristics	
10	DC Supply:	+5VDC @ 200mA Typ -12VDC @ 60mA Typ	109 mA @ +5VDC 10 mA @ -12VDC	
11	Control Signal:	All TTL lines Pulled High "1" All TTL lines "1" = NONE TTL1 "0" → (J0-J1) TTL2 "0" → (J0-J2) TTL3 "0" → (J0-J3) TTL4 "0" → (J0-J4) TTL5 "0" → (J0-J5) TTL6 "0" → (J0-J6)	Pass	PMI QA 2

QA/QC Approval:  Date: 8/14/17


PMI
QA 2



SUMMARY TEST DATA ON P6T-2G18G-55-R-512-SFF

PL21465/1732

(J0-J1) Insertion Loss and Return Loss

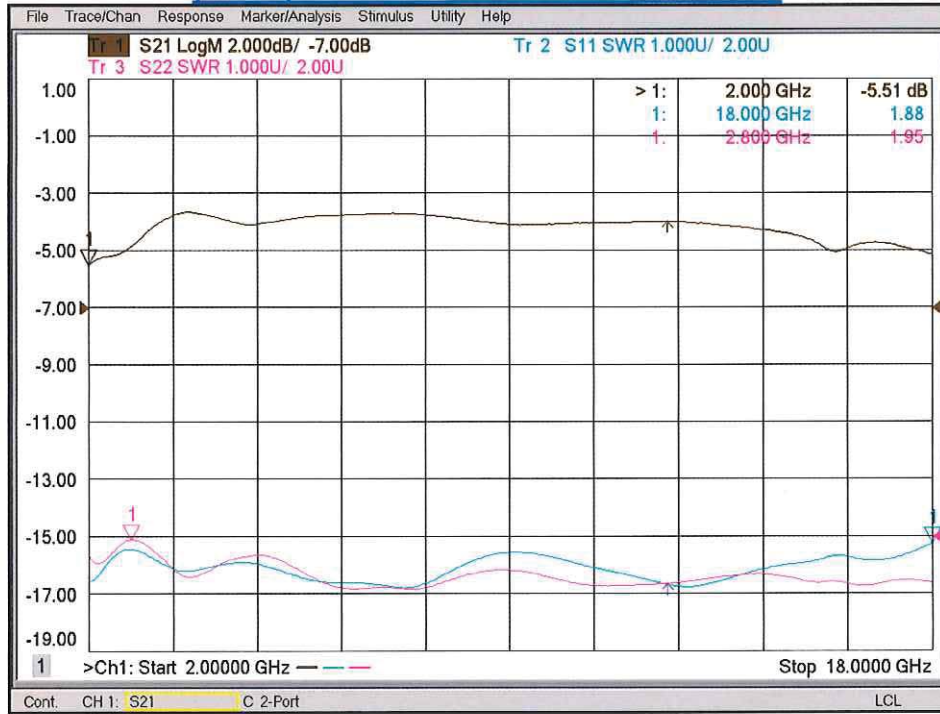

(J0-J2) Insertion Loss and Return Loss







**SUMMARY TEST DATA
ON
P6T-2G18G-55-R-512-SFF**

PL21465/1732

(J0-J3) Insertion Loss and Return Loss

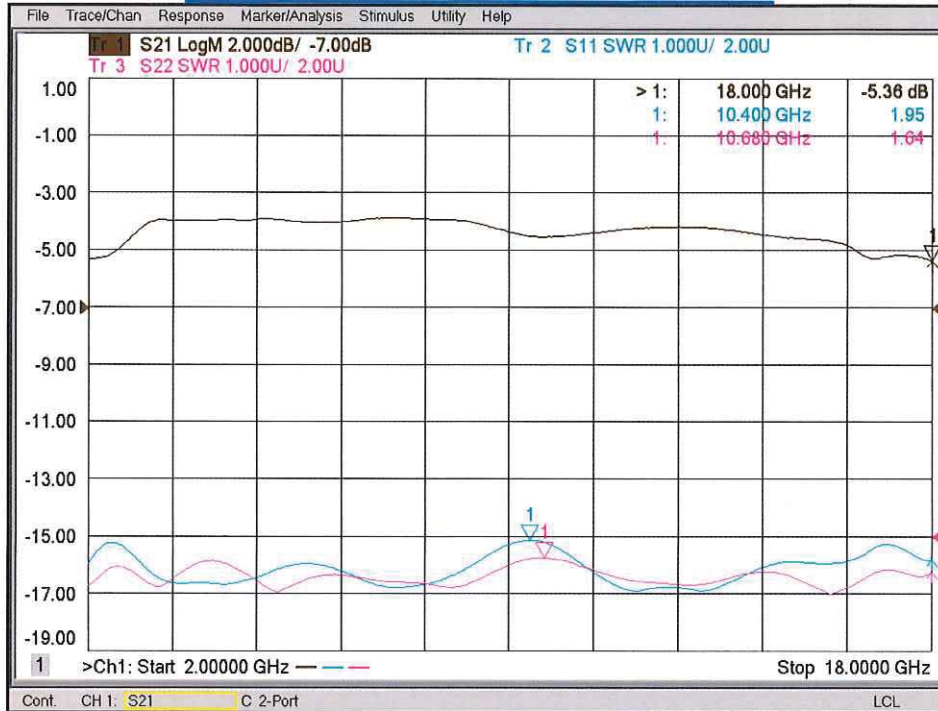

(J0-J4) Insertion Loss and Return Loss

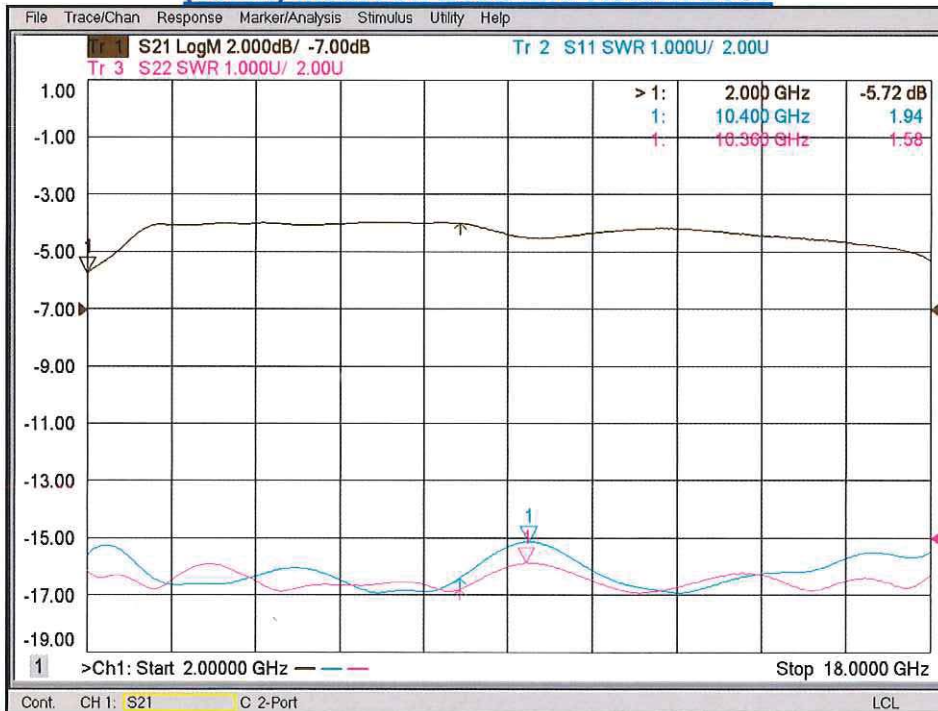





SUMMARY TEST DATA ON P6T-2G18G-55-R-512-SFF

PL21465/1732

(J0-J5) Insertion Loss and Return Loss

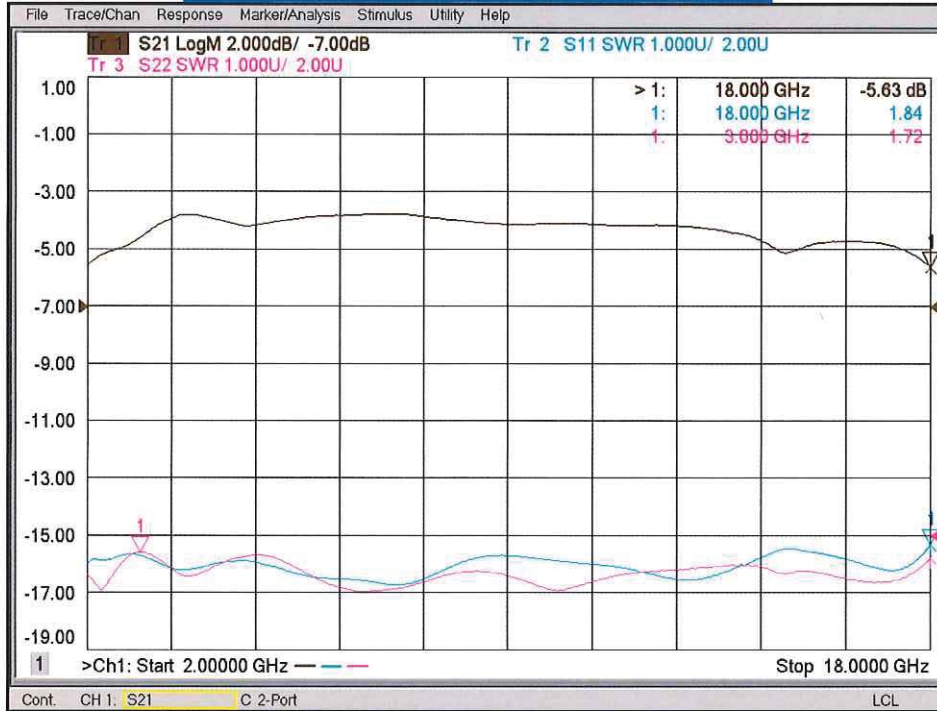

(J0-J6) Insertion Loss and Return Loss

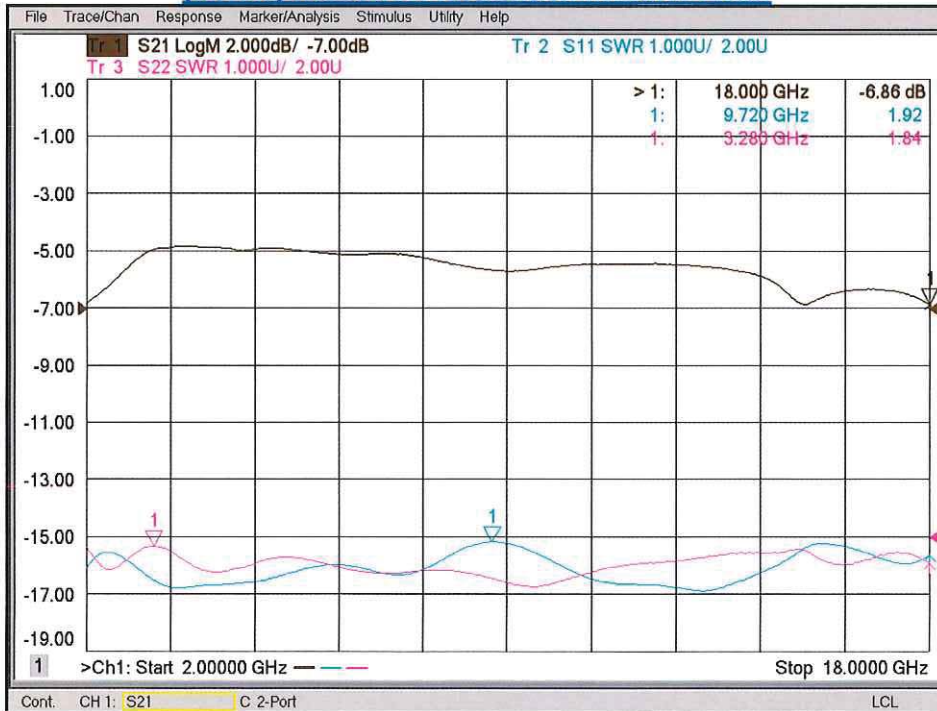




**SUMMARY TEST DATA
ON
P6T-2G18G-55-R-512-SFF**

PL21465/1732

(J0 – J1) Isolation and Termination Return Loss



(J0 – J2) Isolation and Termination Return Loss

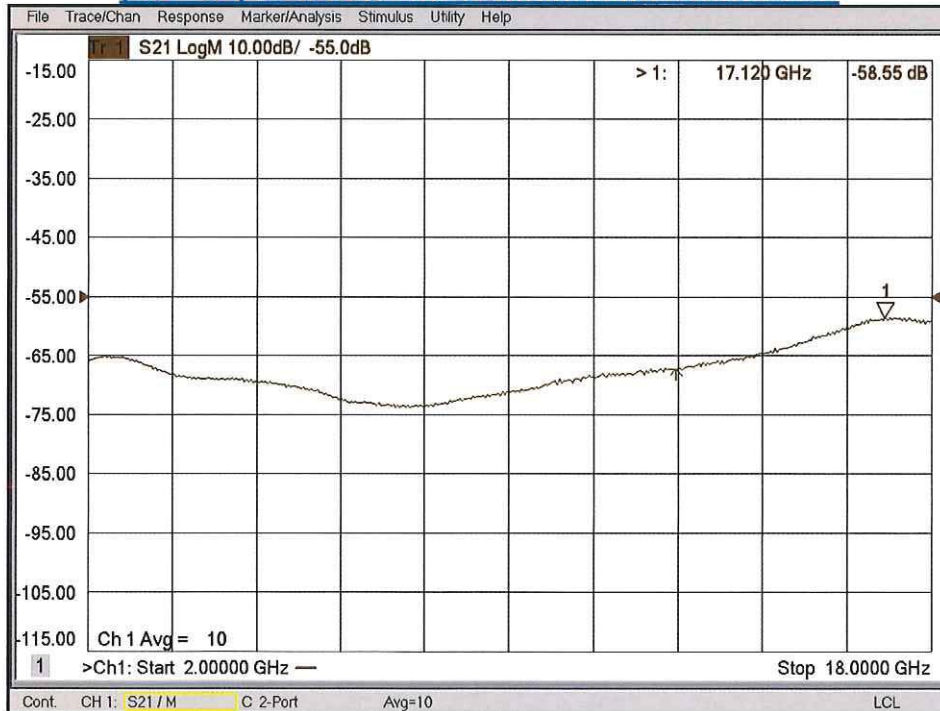





**SUMMARY TEST DATA
ON
P6T-2G18G-55-R-512-SFF**

PL21465/1732

(J0 – J3) Isolation and Termination Return Loss

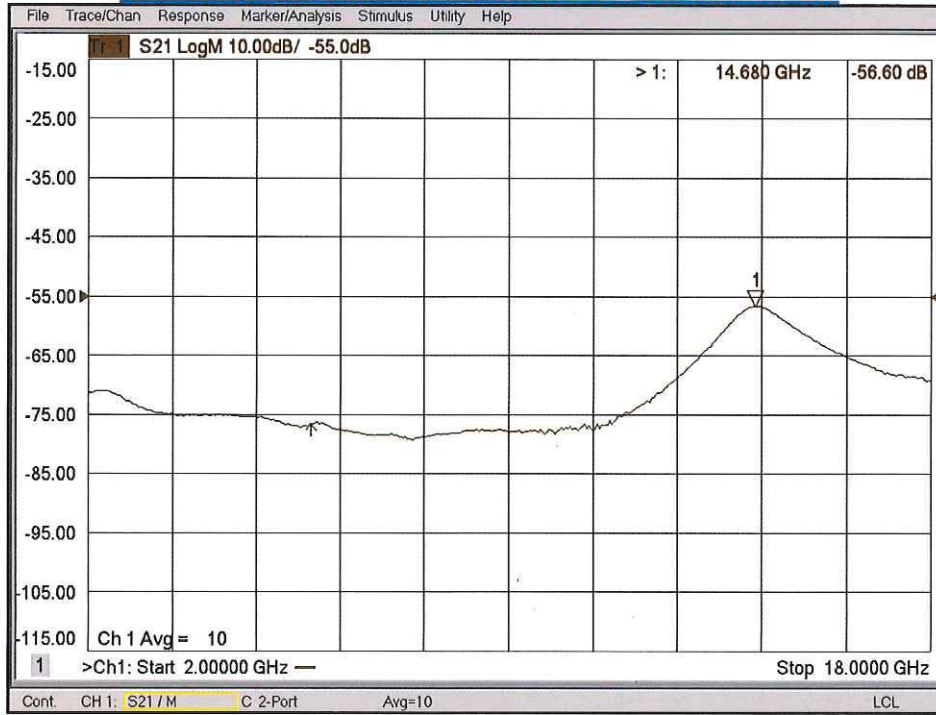

(J0 – J4) Isolation and Termination Return Loss

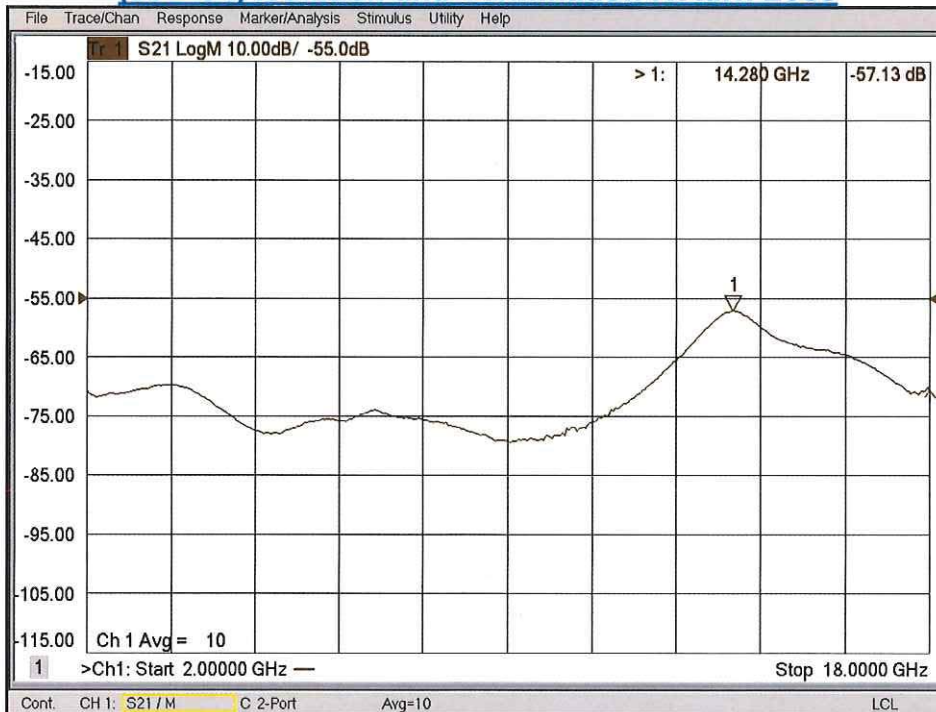



**SUMMARY TEST DATA
ON
P6T-2G18G-55-R-512-SFF**

PL21465/1732

(J0 – J5) Isolation and Termination Return Loss



(J0 – J6) Isolation and Termination Return Loss

