



**SUMMARY TEST DATA
ON
PE2-26-2G18G-5-21-12-SFF-DP**

Customer: _____
 SO No: _____
 Model No: PE2-26-2G18G-5-21-12-SFF-DP
 Serial No: PL22254/1809

Tested By: K. Mansfield
 Temperatures: -55°C, +25°C, +85°C
 Date: 3/8/2018
 Drawing No: 27633170 Rev: B2

Test Item	Parameters	Specified Value	Results			Pass/Fail	QA QC
			-55°C	+25°C	+85°C		
1	Frequency Range:	2.0 to 18.0 GHz	2.0 to 18.0 GHz			Pass See Plots	PMI QA 2
2	Nominal Gain:*	26 dB	26.1 dB	26.4 dB	25.2 dB	Pass See Plots	
3	Gain Window:	±4.0 dB (22 dB Min. / 30 dB Max.) (Relative to Nominal Gain)	0.6 dB -0.4 dB	0.8 dB -0.1 dB	-0.3 dB -1.2 dB	Pass See Plots	
4	Gain Flatness:*	±1.5 dB (Relative to Nominal Gain)	±0.5 dB	±0.5 dB	±0.5 dB	Pass See Plots	
5	Noise Figure: ²	5.0 dB Max.	3.3 dB	3.8 dB	4.4 dB	Pass See Plots	
6	OP1dB: ²	+21 dBm Min. +25 dBm Goal	24.2 dBm	23.5 dBm	22.6 dBm	Pass See Plots	
7	OIP2: ³	+37 dBm Min.	39.7 dBm	39.7 dBm	31.6 dBm	Pass See Table	
8	OIP3: ³	+30 dBm Min.		31.6 dBm		Pass See Table	
9	Input VSWR:*	2.0:1 Max.		1.4:1		Pass See Plots	
10	Output VSWR:*	2.0:1 Max. (2.0 to 15.0 GHz)	1.9:1	Pass See Plots			
		2.8:1 Max. (15.0 to 18.0 GHz)	2.3:1	Pass See Plots			
11	DC Supply:	+11 to +12.5 VDC @ 400 mA Goal, 450 mA Max.	361 mA	391 mA	408 mA	Pass	

* Gain and Gain Flatness shall be measured with 100 MHz steps (201 Points Minimum)

² Noise Figure and OP1dB shall be measured with 1 GHz steps

³ OIP2 and OIP3 shall be measured with 2 GHz steps

Capture all S-parameters (S11, S22, S12, S21) over all the specified frequencies and temperatures & round to one decimal digit on summary table above.



QA/QC Approval: **PMI QA 2** Date: 3/19/18

7311-F Grove Road, Frederick, MD 21704 USA
 Phone: (301) 662-1731
 Email: sales@pmi-rf.com



SUMMARY TEST DATA
ON
PE2-26-2G18G-5-21-12-SFF-DP

PL22254/1809

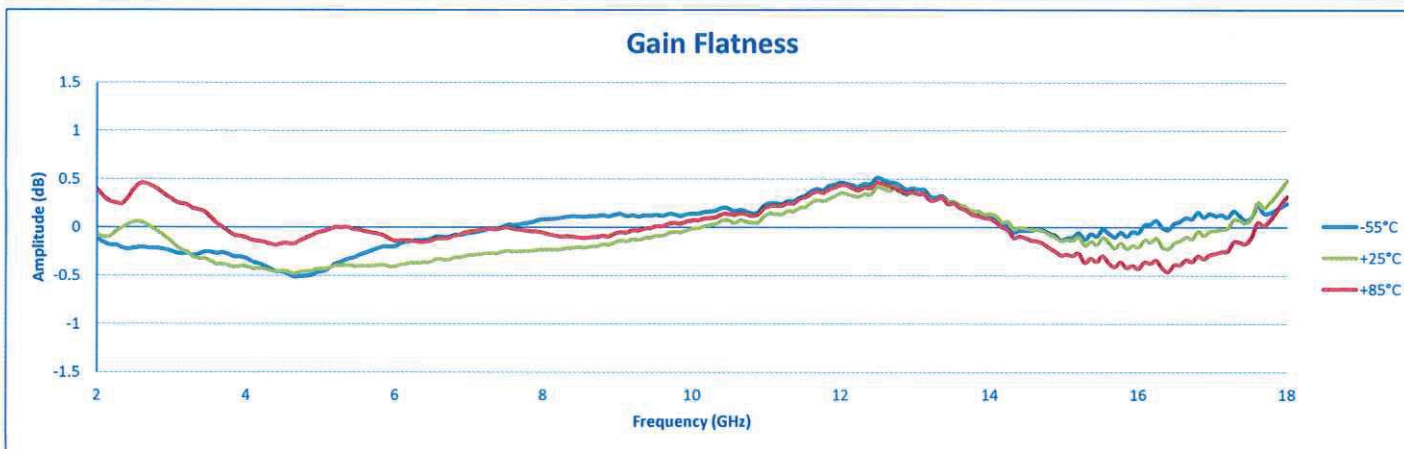
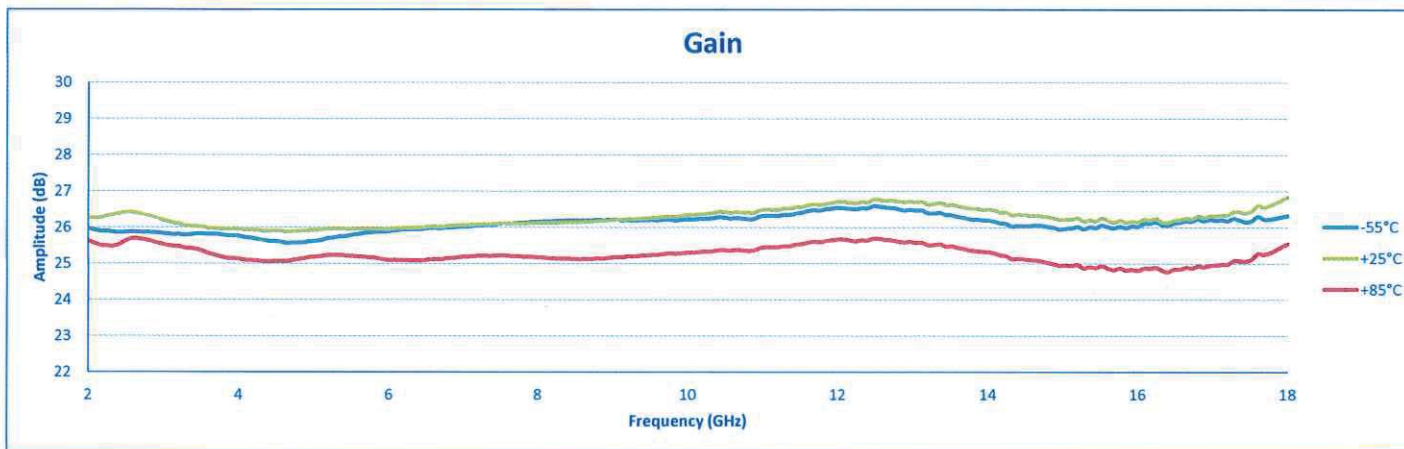


7311-F Grove Road, Frederick, MD 21704 USA
Phone: (301) 662-1731
Email: sales@pmi-rf.com



SUMMARY TEST DATA
ON
PE2-26-2G18G-5-21-12-SFF-DP

PL22254/1809

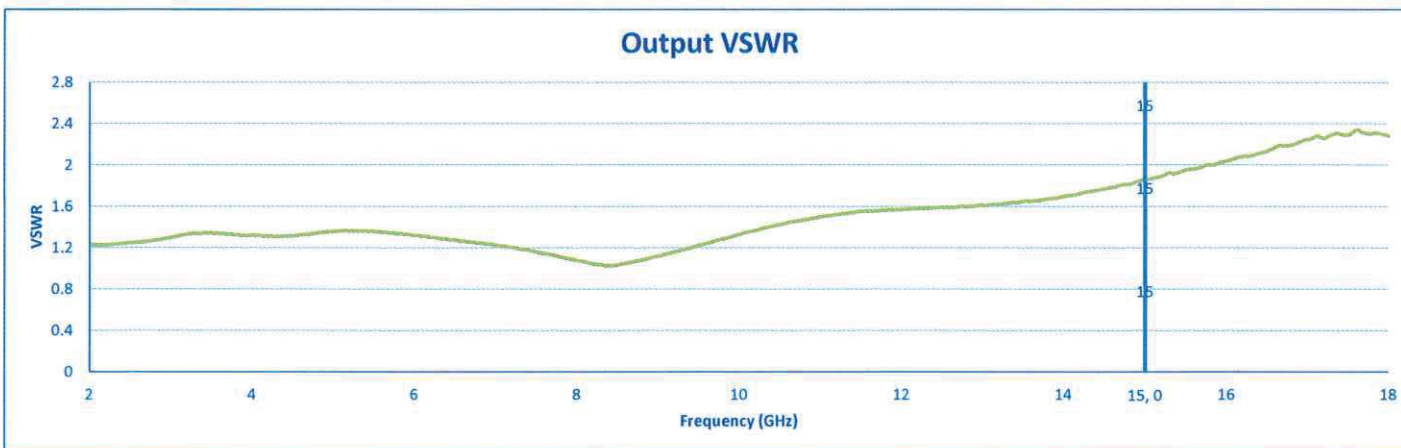
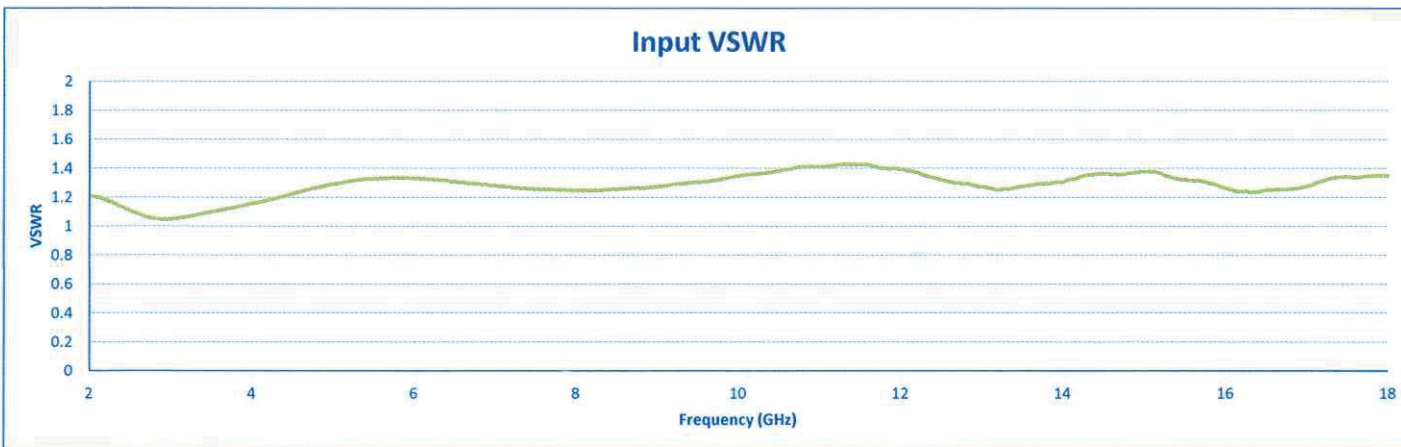


7311-F Grove Road, Frederick, MD 21704 USA
Phone: (301) 662-1731
Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
PE2-26-2G18G-5-21-12-SFF-DP**

PL22254/1809

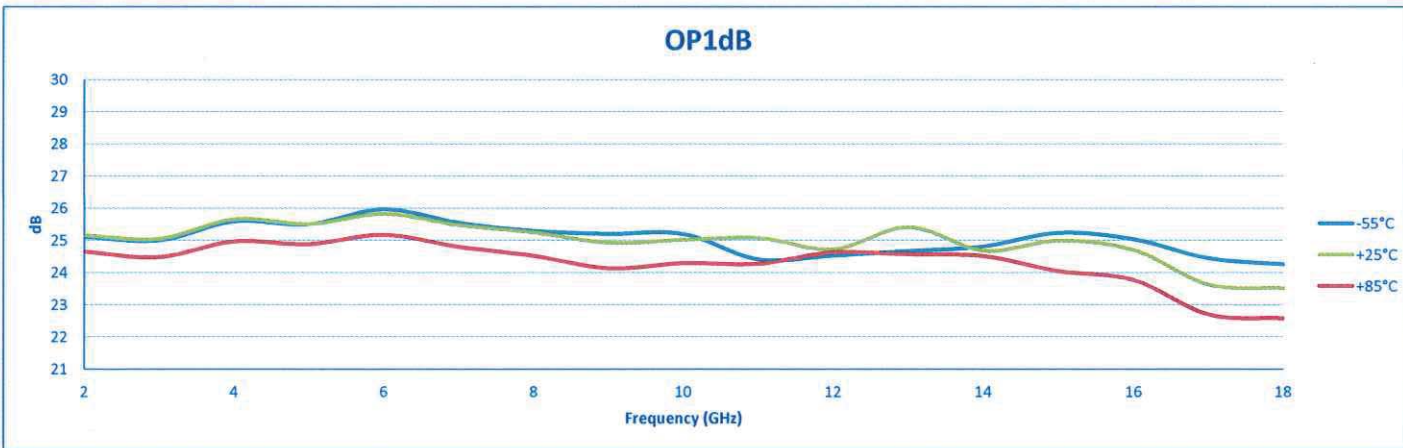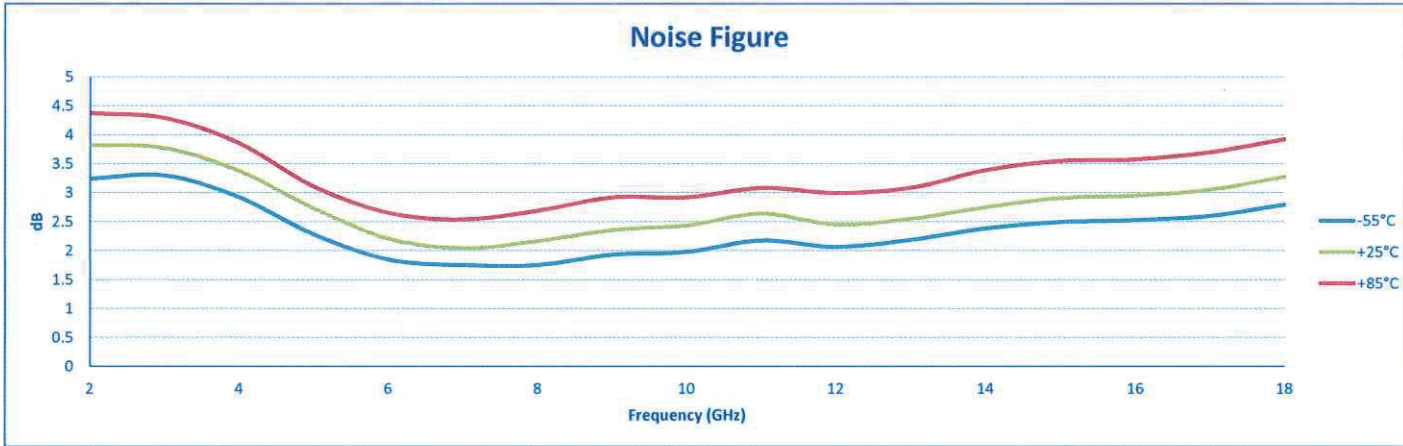

7311-F Grove Road, Frederick, MD 21704 USA
Phone: (301) 662-1731
Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
PE2-26-2G18G-5-21-12-SFF-DP**

PL22254/1809

<u>Freq</u>	<u>IP3</u>	<u>IP2</u>
2000	37.2	39.7
4000	37.3	43.2
6000	39.4	48.1
8000	34.3	39.8
10000	33.0	48.0
12000	33.2	51.8
14000	31.6	52.1
16000	33.3	51.7
18000	32.8	51.3

7311-F Grove Road, Frederick, MD 21704 USA
Phone: (301) 662-1731
Email: sales@pmi-rf.com