



**SUMMARY TEST DATA  
ON  
P2T-500M40G-60-R-55-292FF**

PL22400/1814

Customer: _____	Tested By: <u>Jerry N.</u>	
SO No: _____	Temperature: <u>+25°C</u>	
Model No: <u>P2T-500M40G-60-R-55-292FF</u>	Date: <u>04/04/18</u>	
Serial No: <u>PL22400/1814</u>	Drawing No: <u>27627641</u>	Rev: <u>A1</u>

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	0.5 GHz - 40.0 GHz	0.5 GHz - 40.0 GHz	PMI QA 2
2	Insertion Loss	5.5 dB Typ.	4.91 dB (See Plot)	
3	Isolation	55 dB Min	62.30 dB (See Plot)	
4	VSWR : In/Out	2.5:1 Typ	2.45 :1 (See Plot)	
5	Switching Speed	Rise/Fall : 15 ns Max. Delay ON/OFF : 50 ns Max.	Rise/Fall : 3 ns Delay ON/OFF : 25 ns See Typical Characteristics	
6	Input Power:	+20 dBm CW Max.	Pass	
7	Survival Power:	1W Peak 1us	Pass	
8	DC Supply:	+5VDC @ 200 mA Max. -5VDC @ 100 mA Max.	50 mA 18 mA	
9	Control Signal:	TTL LOGIC SEE LOGIC TABLE	Pass	PMI QA 2

QA/QC Approval:  PMI QA 2 Date: 4/4/18




**SUMMARY TEST DATA  
ON  
P2T-500M40G-60-R-55-292FF**

PL22400/1814

**(J1 – J2) Insertion Loss and Return Loss**



**(J1 – J2) Isolation and Termination Return Loss**

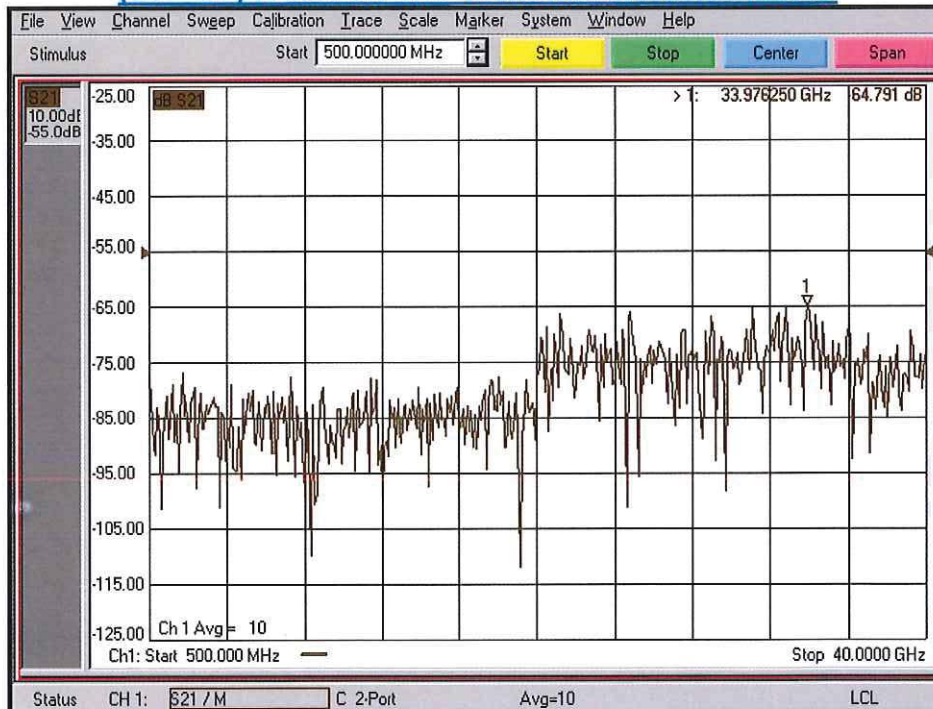




# SUMMARY TEST DATA ON P2T-500M40G-60-R-55-292FF

PL22400/1814

## (J1 – J3) Insertion Loss and Return Loss

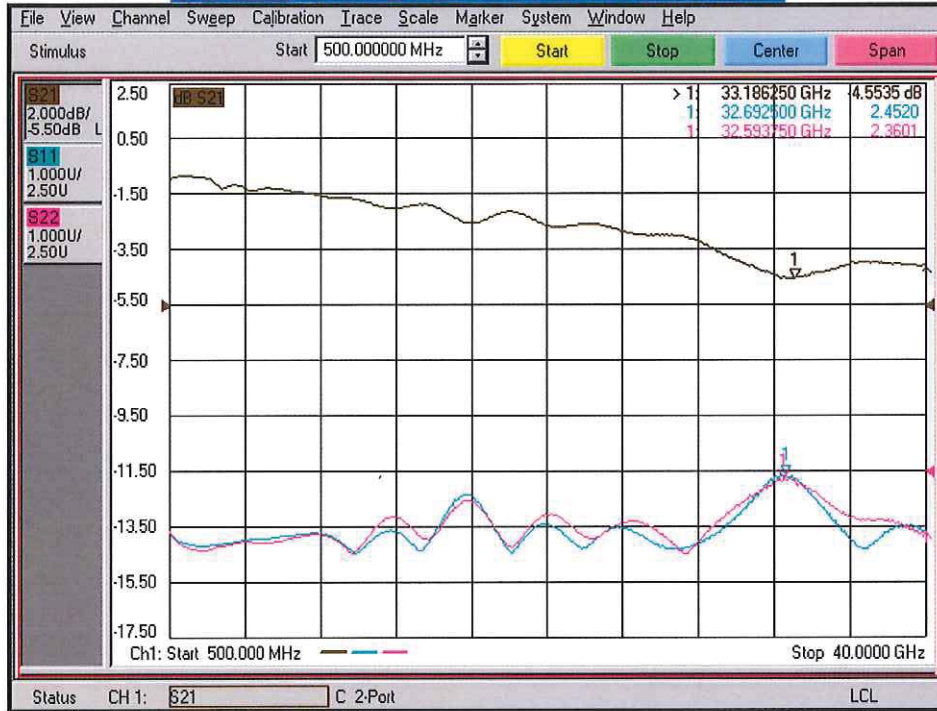

## J1 – J3) Isolation and Termination Return Loss

