



SUMMARY TEST DATA ON PS-360-DC-3 OPTION 618-15D-10BIT

Customer: _____
 Job No: _____
 Model No: PS-360-DC-3 OPTION 618-15D-10BIT
 Serial No: PL22900/1825

Tested By: K. Mansfield
 Date: Tuesday, June 19, 2018
 Temp: 25°C
 Drawing No: 27634080 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	6 - 18 GHz	6 - 18 GHz	
2	Insertion Loss:	12 dB Max. 10 dB Typ.	11.7 dB See Plot	
3	VSWR:	2.0:1 Max.	1.5:1 In 1.9:1 Out See Plot	
4	Accuracy:	±15° Max. (Peak to Peak)	+7.9° -8.5° See Plot	
5	PM/AM	±2.5 dB Max.	±1.2 dB	
6	Translation Rate:	0 to 500 KHz	500 KHz Min. See Typical Characteristics	
7	Carrier Suppression:	18 dB	20 dB See Typical Characteristics	
8	Side Band Suppression:	15 dB	9.5 dB See Typical Characteristics	
9	Phase Shift - Range:	360°	360°	
	Phase Shift - Control Input:	10 Bit TTL	Pass	
	Phase Shift - Switching Speed:	50% TTL to within 500 ns Max. (10° of Final Phase Shift)	<50 ns On <50 ns Off See Typical Characteristics	
	Phase Shift - Harmonics:	-25 dBc	-28 dBc See Typical Characteristics	
10	Power Handling - Without Damage:	+10 dBm	Pass	
	Power Handling - Survival:	+20 dBm	Pass	
11	Power Supply:	+5 VDC (±5%) @ 115 mA 12 to -15 VDC @ 20 mA	+5 VDA @ 74 mA -15 VDC @ 22 mA	



QA/QC Approval: _____

Date: _____



SUMMARY TEST DATA ON PS-360-DC-3 OPTION 618-15D

PL22900/1825

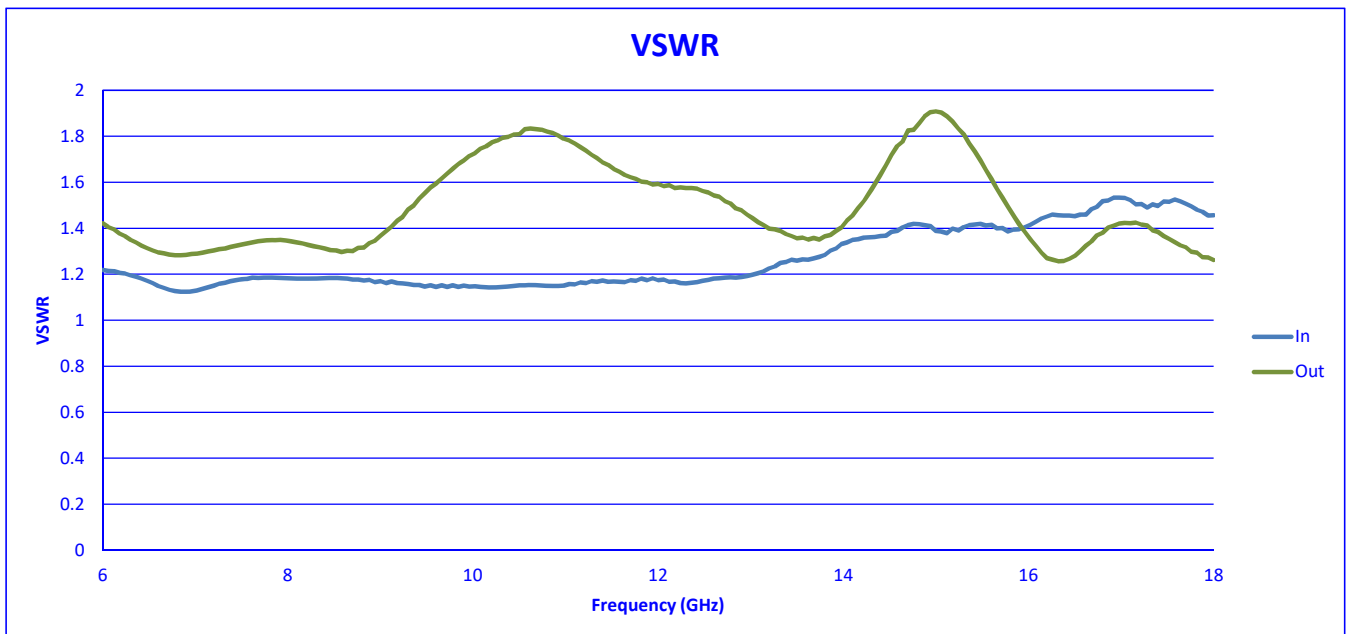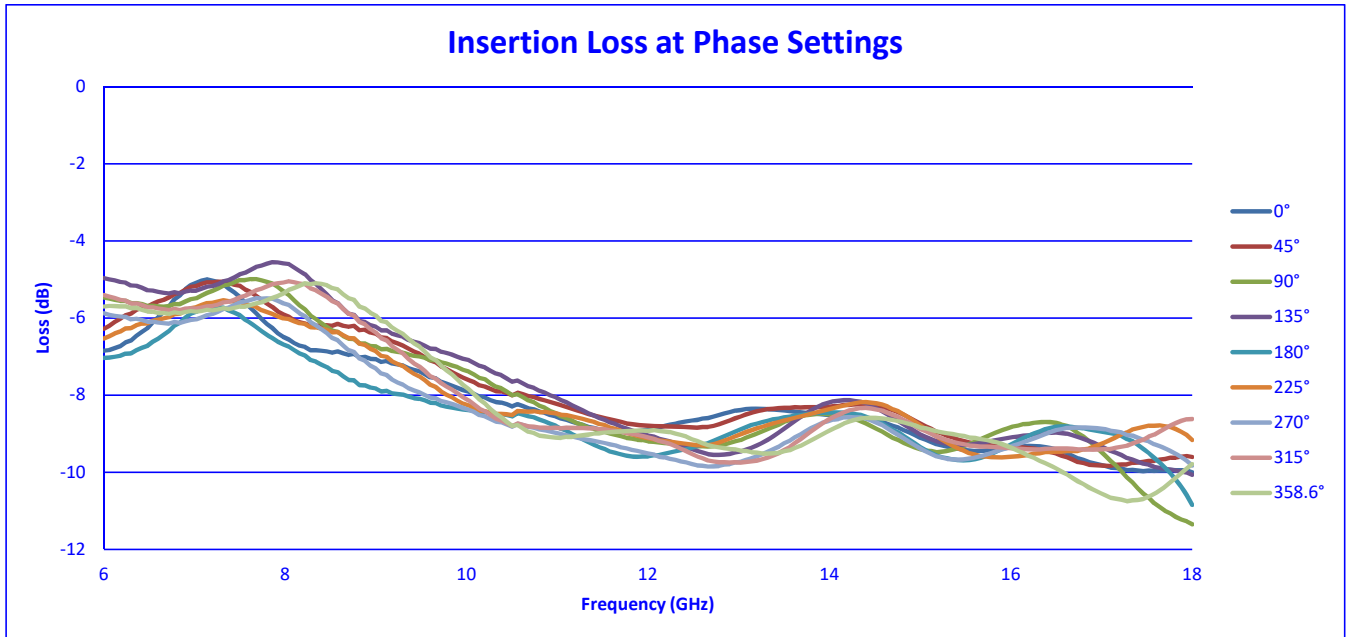



SUMMARY TEST DATA ON PS-360-DC-3 OPTION 618-15D

PL22900/1825

