



**SUMMARY TEST DATA
ON
P1T-18G40G-90-1515-292FF**

PL23012/1827

Customer: _____ Tested By: A. Lopez
 SO No: _____ Temperature: +25°C
 Model No: P1T-18G40G-90-1515-292FF Date: 10/11/18
 Serial No: PL23012/1827 Drawing No: 26912229 Rev: A3

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	18 GHz – 40 GHz	18 GHz – 40 GHz (See Plot)	PMI QA 2
2	Insertion Loss:	5.0 dB Max	4.91 dB (See Plot)	
3	Isolation:	90 dB Min.	90.49 dB (See Plot)	
4	VSWR: (IN/OUT)	1.5:1 Goal. 2.0:1 Max.	Input: 1.94:1 Output: 1.84:1 (See Plot)	
5	Switching Speed: (10% to 90% RF)	15 ns Goal. 25 ns Max.	Pass See Typical Characteristics	
6	Input Power:	+23 dBm CW Max.	Pass See Typical Characteristics	
7	DC Supply:	+15VDC @ 100 mA -15VDC @ 100 mA	+15 VDC @ 55 mA -15 VDC @ 35 mA	
8	Control Signal:	0 VDC J1 - J2 (On) +5VDC J1 – J2 (Off)	Pass	PMI QA 2


QA/QC Approval: *[Signature]* PMI
QA 2 Date: 10/11/18



**SUMMARY TEST DATA
ON
P1T-18G40G-90-1515-292FF**

PL23012/1827

Insertion Loss and Return Loss

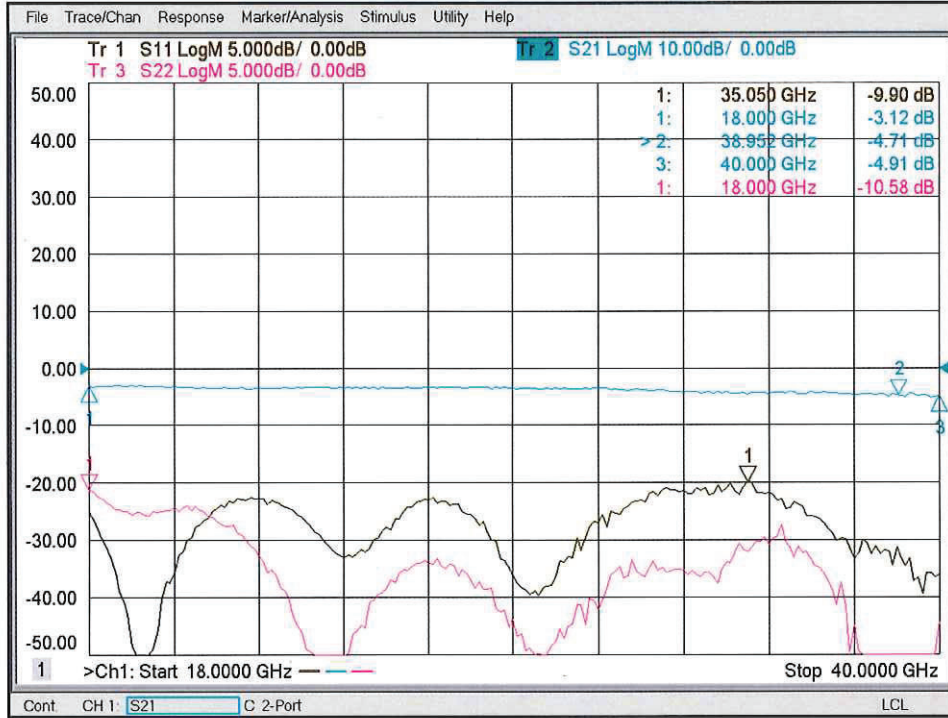

Isolation

