



**SUMMARY TEST DATA
ON
PEC-25-500M40G-20-12-292FF-OPT125**

Customer: _____
 SO No: _____
 Model No: PEC-25-500M40G-20-12-292FF-OPT125
 Serial No: PL25628/1921

Tested By: K. Mansfield
 Temperature: +25C
 Date: 5/24/2019
 Drawing No: 27635780 REV: A1


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC	
1	Frequency Range:	1.0 GHz - 25 GHz	1.0 GHz - 25 GHz	PMI QA 1	
2	Gain:	25 dB Typ.	27 dB Max. 24.7 dB Typ. 22.4 dB Min. See Plot		
3	Gain Flatness:	±2.5 dB Max.	±2.29 dB See Plot		
4	Noise Figure:	5.5 dB Typ.	4.8 dB See Plot		
5	OP1dB:	+19 dBm Typ. (1.0-18 GHz) +17 dBm Typ. (18-25 GHz)	+18.2 dBm Typ. (1.0-18 GHz) +17.7 dBm Typ. (18-25 GHz) See Plot		
6	Psat:	+23 dBm Typ. (1.0-18 GHz) +20 dBm Typ. (18-25 GHz)	+21.8 dBm Typ. (1.0-18 GHz) +20.3 dBm Typ. (18-25 GHz) See Plot		
7	VSWR: (Input/Output)	2.0:1 / 2.5:1 Max.	2:1 In 1.8:1 Out See Plot		
8	Input Power Handling:	+17 dBm CW Max.	Pass		
9	DC Supply:	+12 to +15 VDC @ 350 mA Nominal	+12 to +15 VDC @ 234 mA		PMI QA 1

QA/QC Approval: PMI QA 1 Date: 5/24/19



SUMMARY TEST DATA ON PEC-25-500M40G-20-12-292FF-OPT125

PL25628/1921

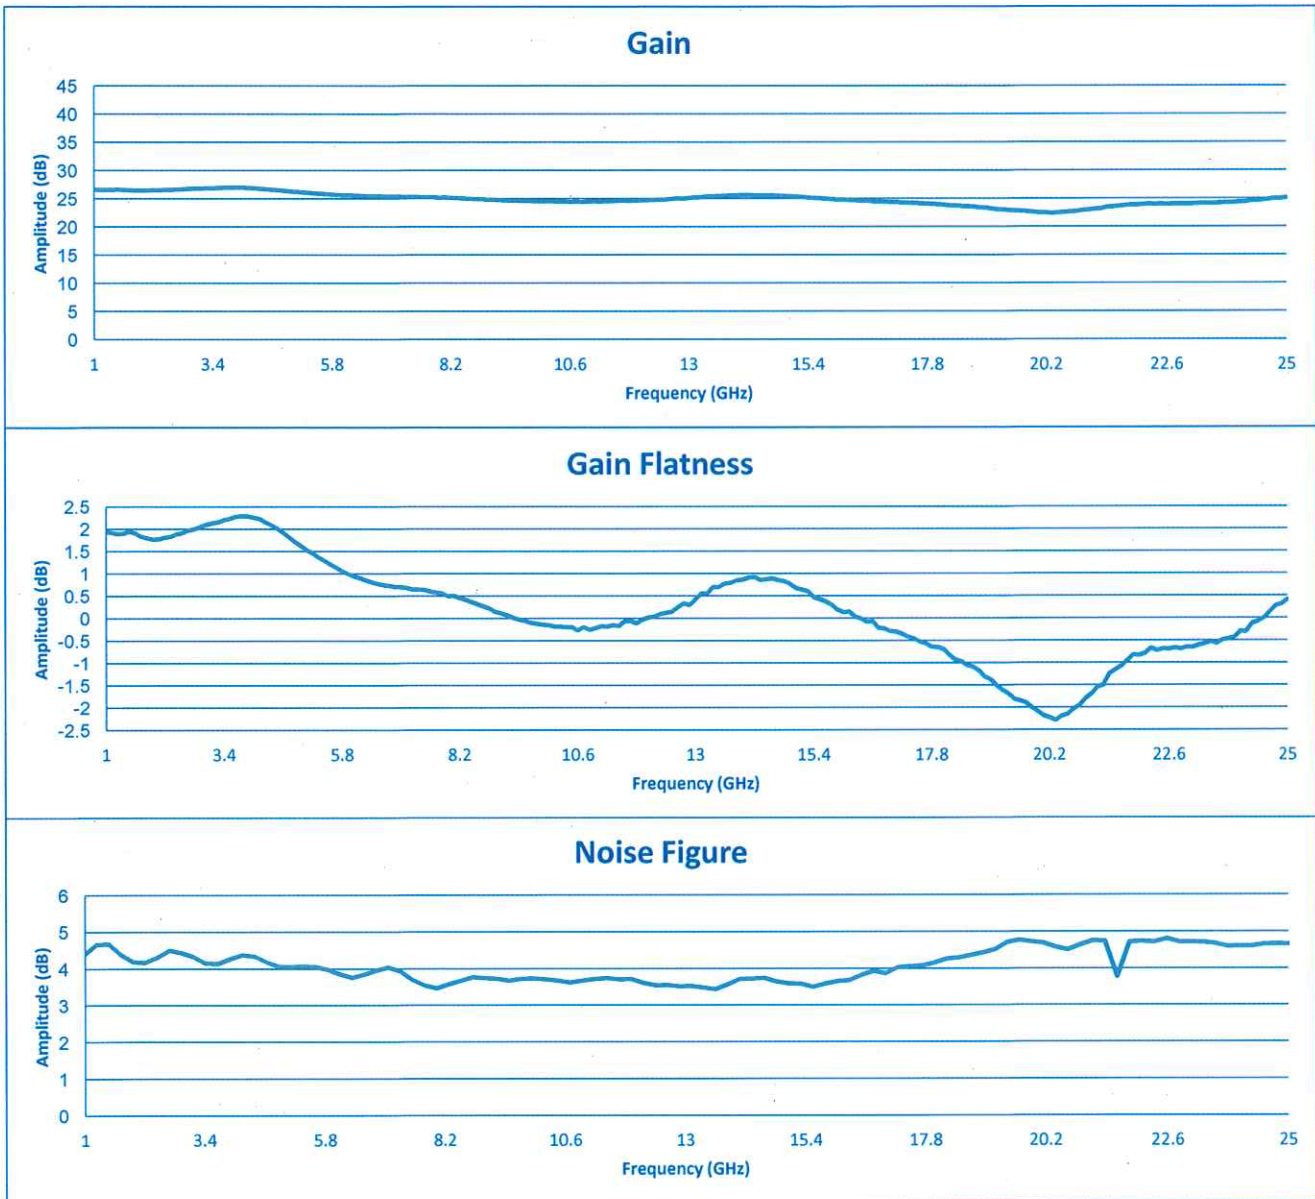

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com



SUMMARY TEST DATA ON PEC-25-500M40G-20-12-292FF-OPT125

PL25628/1921

