



**SUMMARY TEST DATA  
ON  
P1T-6G18G-60-T-SFF-1W**

PL26019/1931

Customer: \_\_\_\_\_ Tested By: B. Willard  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: P1T-6G18G-60-T-SFF-1W Date: 07/30/19  
Serial No: PL26019/1931 Drawing No: 27628521 Rev: A1

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	6.0 to 18.0 GHz	6.0 to 18.0 GHz	PMI QA1	
2	Insertion Loss:	2.75dB Max	2.65 dB (See Plot)		
3	Isolation:	65dB Min	80.71 dB (See Plot)		
4	VSWR:	2.0:1 Max (1.5:1 Goal)	1.93:1		
5	Switching Speed:	25ns Typ	<25ns See Typical Characteristics		
6	Operating Power:	+30dBm Max	+30dBm See Typical Characteristics		
7	Control	TTL Logic "0" = Insertion Loss "1" = Isolation	Pass		
8	Power Supply:	+5VDC @ 50mA Max -15VDC @ 75mA Max	33mA 66mA		PMI QA1


QA/QC Approval:   Date: 7/31/19



# SUMMARY TEST DATA ON P1T-6G18G-60-T-SFF-1W

PL26019/1931

## (J1-J2) Insertion Loss and Return Loss

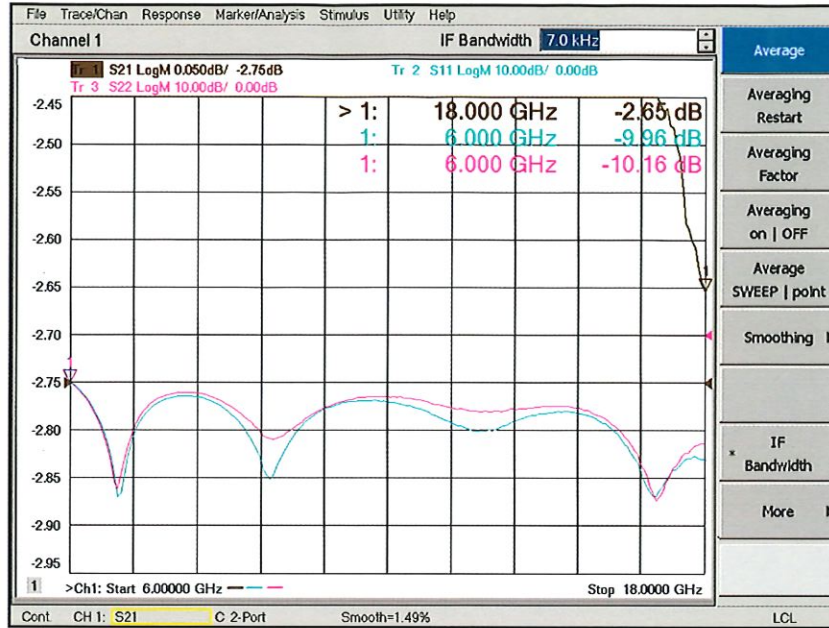

## (J1 - J2) Isolation and Termination Return Loss

