



SUMMARY TEST DATA ON DTA-2G18G-60-12-CD-1-20DBM-TS

Customer: _____
 Job No: _____
 Model No: DTA-2G18G-60-12-CD-1-20DBM-TS
 Serial No: PL26063/1931

Tested By: E. KRETZ
 Date: Wednesday, July 31, 2019
 Temperature: +25° C
 Drawing No: 27617795 Rev: A2

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	PASS/FAIL	QA QC	
1	Frequency Range:	2 GHz – 18 GHz	2 GHz – 18 GHz	PMI QA 1	
2	Insertion Loss:	4.8 dB Max.	3.5 dB See Plot		
3	VSWR:	2.0:1 Max.	1.82:1 See Plot		
4	Flatness to 20 dB:	± 1.0 dB Typ.	0.45 dB See Plot		
6	Flatness to 40 dB:	± 1.25 dB Typ.	0.87 dB See Plot		
7	Flatness to 60 dB:	± 3.0 dB Typ.	2.01 dB See Plot		
8	Accuracy of Attenuation 0 to 20 dB:	± 1.0 dB Typ.	0.34 dB See Plot		
9	Accuracy of Attenuation 20 to 40 dB:	± 1.5 dB Typ.	0.45 dB See Plot		
10	Accuracy of Attenuation 40 to 60 dB:	± 2.0 dB Typ.	0.47 dB See Plot		
11	Temp. Sensor:	10mV/°C, 3.0V @ 25°C	3.1V		
12	Switching Speed:	On Time: 1.0 µs Max. Off Time: 0.5 µs Max.	<1.0 µs On Time <0.5 µs Off Time See Typical Characteristics		
13	DC Supply:	+15VDC @ 150 mA Max.	119 mA		PMI QA 1

Programed Attenuation	Attenuation	Accuracy of Attenuation	Flatness dB
dB	dB	dB	±dB
0.0156	0.0164	0.00	0.01
0.0313	0.0298	0.00	0.01
0.0625	0.06	0.00	0.01
0.125	0.12	0.00	0.01
0.25	0.24	0.01	0.02
0.50	0.48	0.02	0.03
1.00	0.97	0.03	0.05
2.00	1.94	0.06	0.09
4.00	3.89	0.11	0.17
8.00	7.81	0.19	0.28
16.00	15.72	0.43	0.43
32.00	31.57	0.43	0.67



Programed Attenuation	Attenuation	Accuracy of Attenuation	Flatness dB
dB	dB	dB	±dB
5.00	4.80	0.20	0.20
10.00	9.78	0.22	0.33
15.00	14.66	0.34	0.41
20.00	19.67	0.33	0.45
25.00	24.55	0.45	0.57
30.00	29.56	0.44	0.61
35.00	34.57	0.43	0.69
40.00	39.60	0.40	0.87
45.00	44.53	0.47	0.89
50.00	49.73	0.27	1.39
55.00	54.64	0.36	1.81
60.00	59.72	0.28	2.01

QA/QC Approval: PMI QA 1 Date: 8/1/19



SUMMARY TEST DATA ON DTA-2G18G-60-12-CD-1-20DBM-TS

PL26063/1931

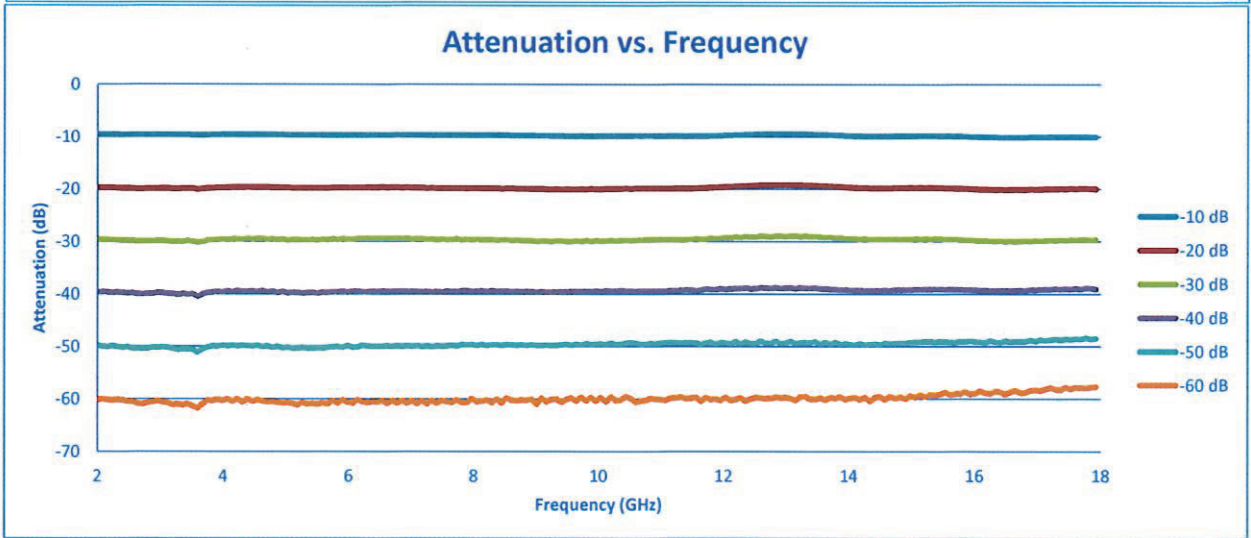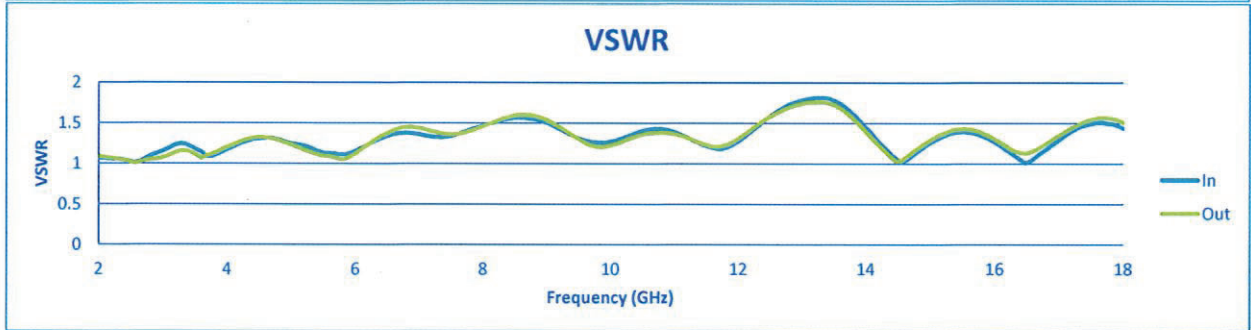



**SUMMARY TEST DATA
ON
DTA-2G18G-60-12-CD-1-20DBM-TS**

PL26063/1931

