SUMMARY TEST DATA
ON
BPF-11-14-SFF

PL26725/1941

Customer:		**Tested By:**	**C. Ertter**		
SO No:		**Temperature:**	**+25°C**		
Model No:	**BPF-11-14-SFF**	**Date:**	**10/10/19**		
Serial No:	**PL26725/1941**	**Drawing No:**	**27637120**	**Rev:**	**A1**

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	3.75 to 18.25 GHz	**3.59 GHz to 19.21 GHz See Plot**	
2	Insertion Loss	.5 dB Typ., 2.5 dB Max	**0.31 dB See Plot**	
3	VSWR	1.5:1 Typ., 2.0:1 Max	**< 1.9:1 See Plot**	
4	Rejection @ DC to 2.75 GHz	70 dB Typ.	**> 70 dB See Plot**	
5	Rejection @ 20.25 to 23.25 GHz	60 dB Typ.	**> 60 dB See Plot**	
6	Input Power	10 Watts Max.	**Pass**	
7	Impedance	50 Ohms	**Pass**	

QA/QC Approval: _____ **Date:** _____

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com

SUMMARY TEST DATA
ON
BPF-11-14-SFF

PL26725/1941

PL26725/1941

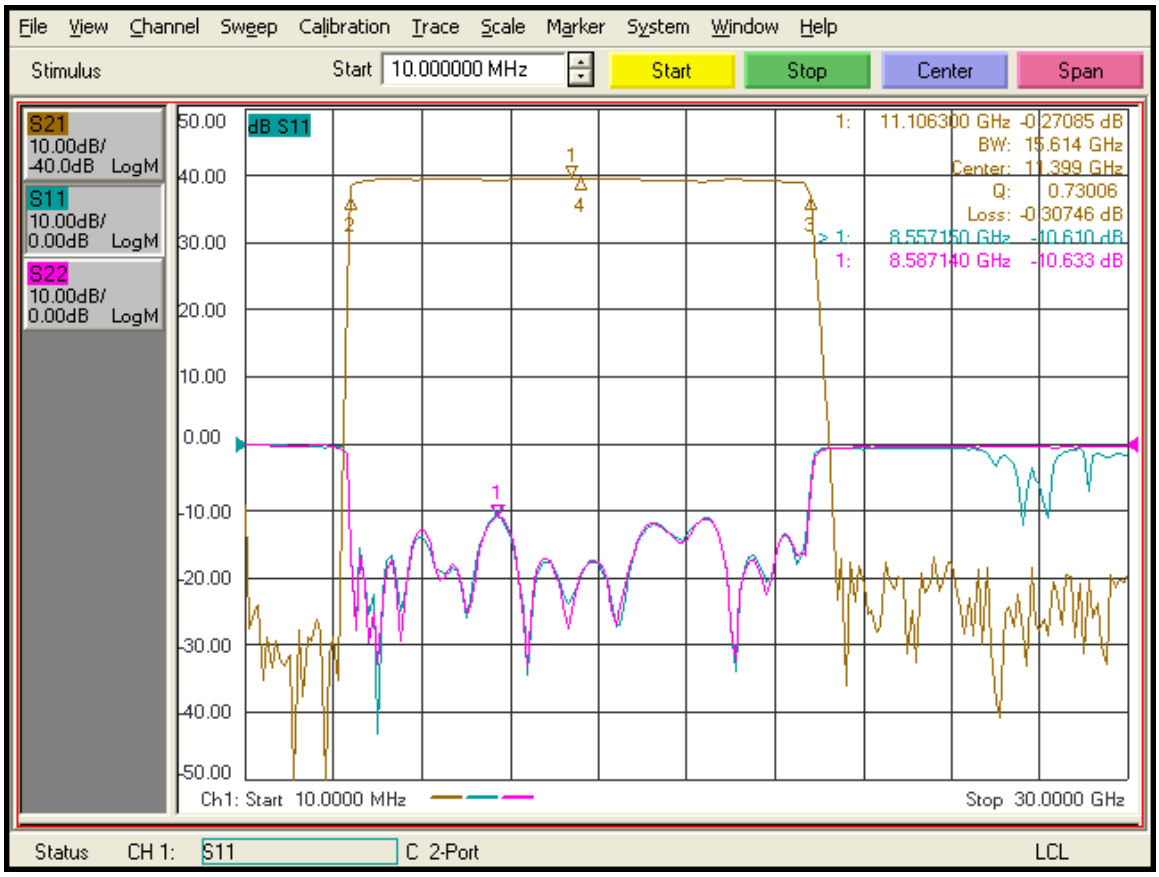

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com