



**SUMMARY TEST DATA
ON
P1T-18G40G-90-1515-292FF**

Customer: _____ Tested By: H. Gonzales
SO No: _____ Temperature: +25°C
Model No: P1T-18G40G-90-1515-292FF Date: 12/03/2020
Serial No: PL30815/2051 Drawing No: 27612231 Rev: A1


TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	18 GHz – 40 GHz	18 GHz – 40 GHz	PMI QA2	
2	Insertion Loss:	5.0 dB Max	4.89dB See Plot		
3	Isolation:	90 dB Min.	92.14dB See Plot		
4	VSWR: (IN/OUT)	1.5:1 Goal. 2.0:1 Max.	1.99:1 See Plot		
5	Switching Speed: (10% to 90% RF)	15 ns Goal. 25 ns Max.	See Typical Characteristics		
6	Input Power:	+23 dBm CW Max.	Pass		
7	DC Supply:	+15VDC @ 100 mA -15VDC @ 100 mA	+15 VDC @ 80mA -15 VDC @ 15mA		
8	Control Signal:	0 VDC J1 - J2 (On) +5VDC J1 - J2 (Off)	Pass		PMI QA2

QA/QC Approval:  PMI QA2 Date: 12/4/20



**SUMMARY TEST DATA
ON
P1T-18G40G-90-1515-292FF**

Insertion Loss and Return Loss

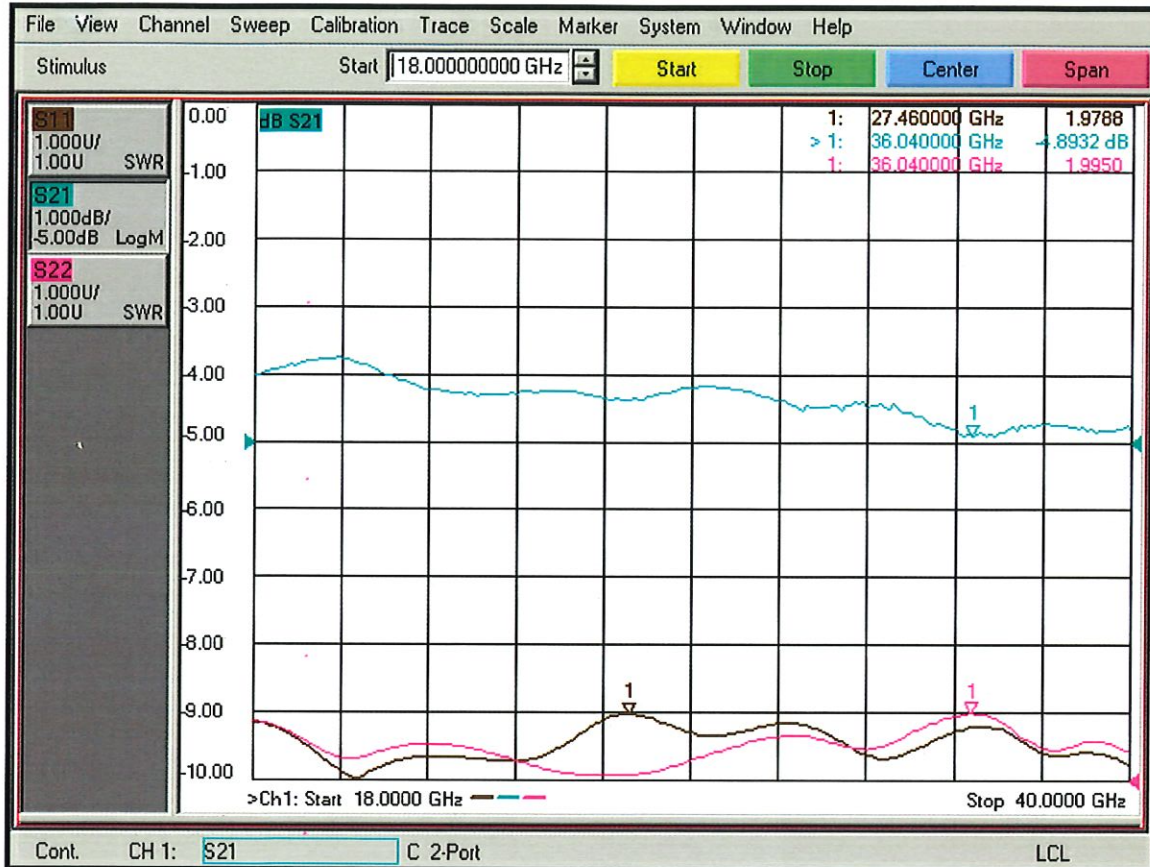



**SUMMARY TEST DATA
ON
P1T-18G40G-90-1515-292FF**

Isolation

