





**SUMMARY TEST DATA
ON
P1T-18G40G-90-1515-292FF**

Tested By: Bryan K.
Temperature: +25°C
Date: 2/3/2021
Drawing No: 27612231 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	18 GHz – 40 GHz	18 GHz – 40 GHz	PMI QA 2	
2	Insertion Loss:	5.0 dB Max	4.77 dB See Plot		
3	Isolation:	90 dB Min.	90.47 dB See Plot		
4	VSWR: (IN/OUT)	1.5:1 Goal. 2.0:1 Max.	1.93 :1 See Plot		
5	Switching Speed: (10% to 90% RF)	15 ns Goal. 25 ns Max.	See Typical Characteristics		
6	Input Power:	+23 dBm CW Max.	Pass		
7	DC Supply:	+15VDC @ 100 mA -15VDC @ 100 mA	+15 VDC @ 8 mA -15 VDC @ 17 mA		
8	Control Signal:	0 VDC J1 - J2 (On) +5VDC J1 - J2 (Off)	Pass		PMI QA 2


QA/QC Approval:   PMI QA 2 Date: 2/3/21

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
P1T-18G40G-90-1515-292FF**

Insertion Loss and Return Loss

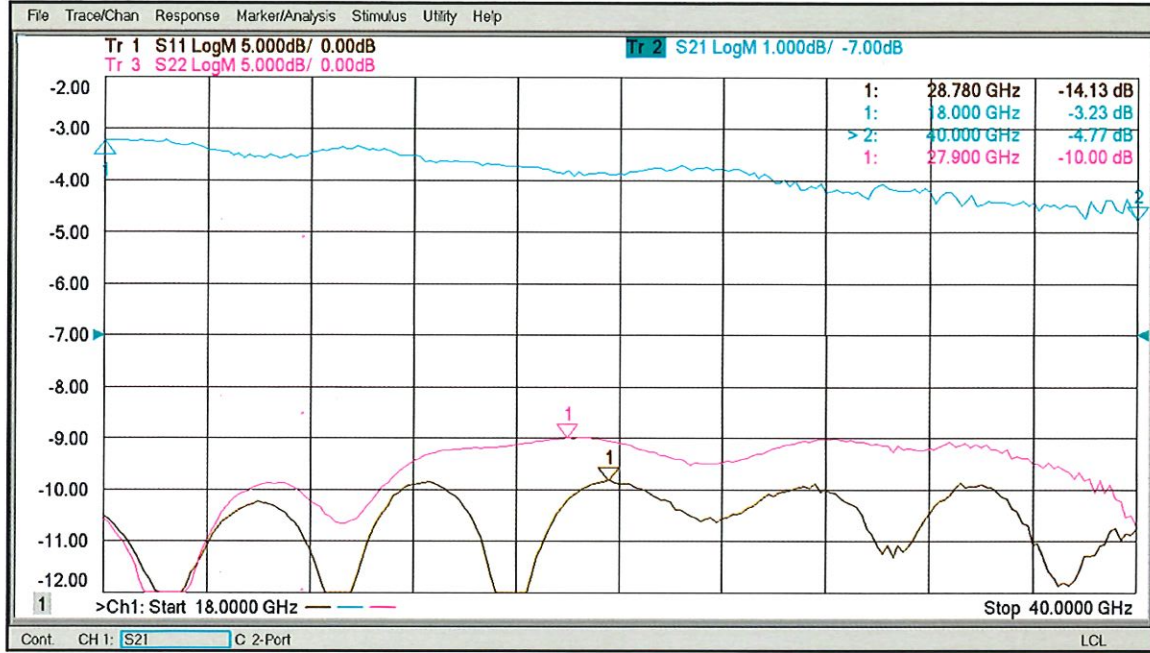

Isolation

