



SUMMARY TEST DATA
ON
P2T-500M20G-50-T-5-12-SFF-I-SP

Customer: _____
 SO No: _____
 Model No: P2T-500M20G-50-T-5-12-SFF-I-SP
 Serial No: PL32209/2120

Tested By: Bryan K.
 Temperature: 25 Degrees C
 Date: 11/27/2023
 Drawing No: 27632800 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	500 MHz to 20 GHz	500 MHz to 20 GHz	PMI QA2
2	Insertion Loss:	2.8 dB Max.	2.61dB See Plot	
3	VSWR:	1.9:1 Max.	1.76:1 See Plot	
4	Input Power:	+23 dBm CW Max.	+23 dBm CW See Typical Characteristics	
5	Isolation:	50 dB Min.	50.38dB See Plot	
6	Switching Speed:	50 ns Max.	40 ns See Typical Characteristics	
7	Surge Protection (+V) TTL Control "1"	24 mA Max.	24 mA See Typical Characteristics	
8	Surge Protection (-V) TTL Control "0"	24 mA Max.	24 mA See Typical Characteristics	
9	DC Voltage:	+5 VDC @ 80 mA Typ. -12 VDC @ 80 mA Typ.	20 mA 80 mA	PMI QA2



QA/QC Approval: *Cameron Kelly* _____ PMI QA2

Date: 11/28/23



SUMMARY TEST DATA
ON
P2T-500M20G-50-T-5-12-SFF-I-SP

PL32209/2120

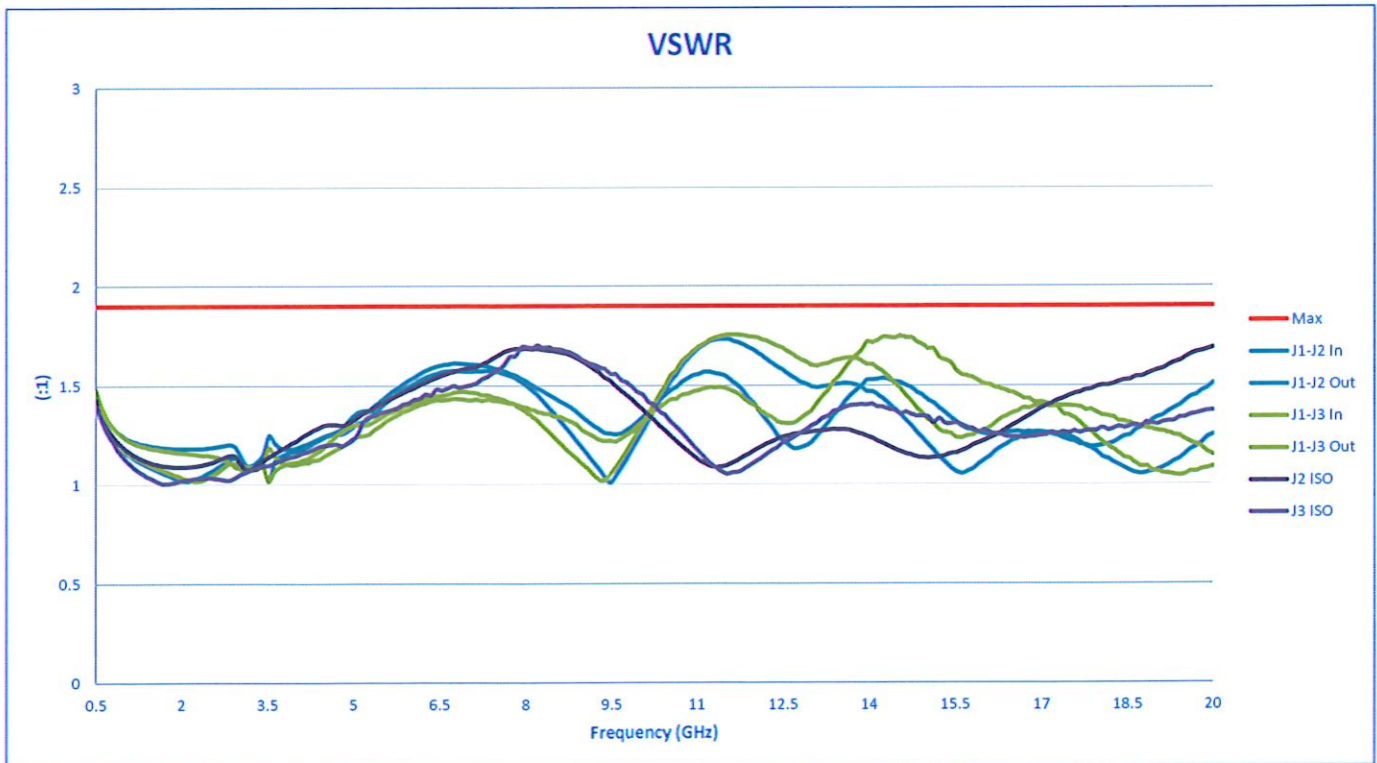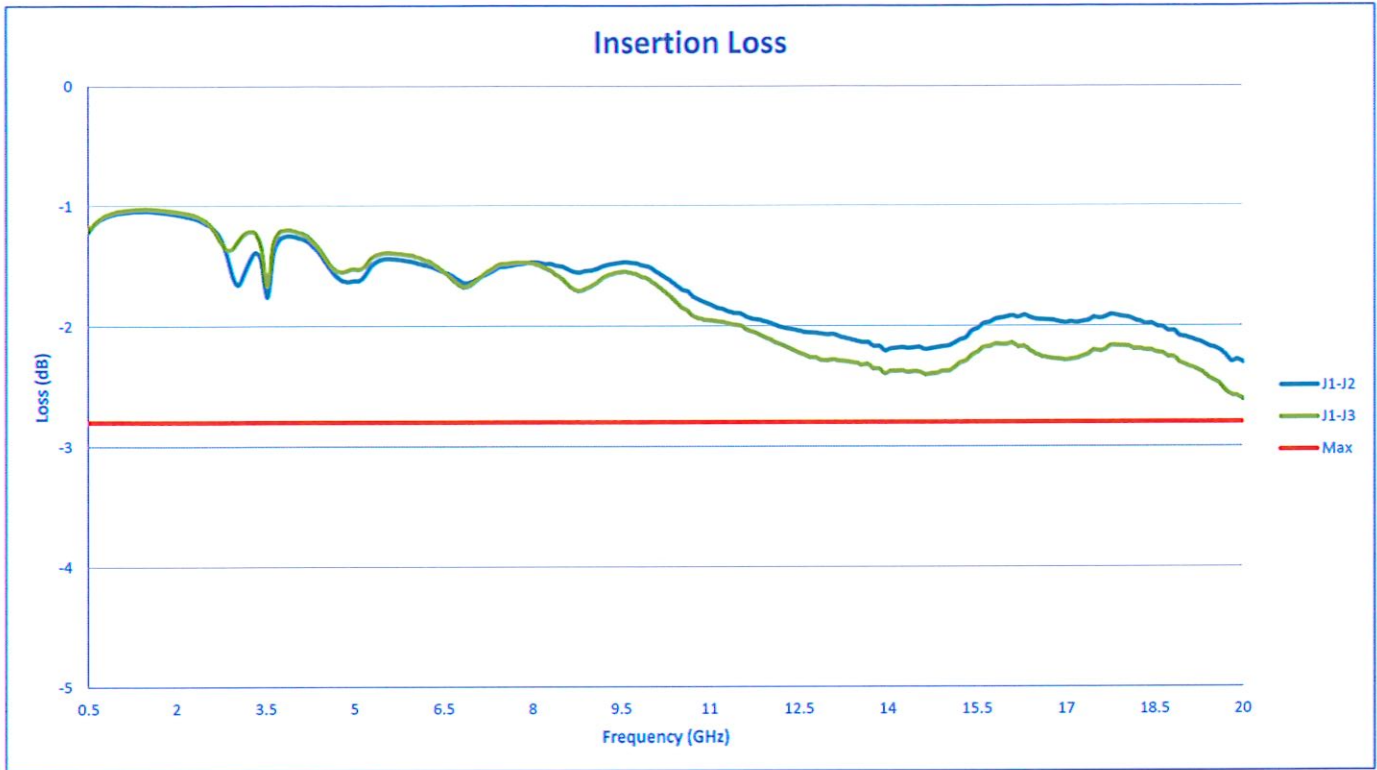



SUMMARY TEST DATA
ON
P2T-500M20G-50-T-5-12-SFF-I-SP

PL32209/2120

